
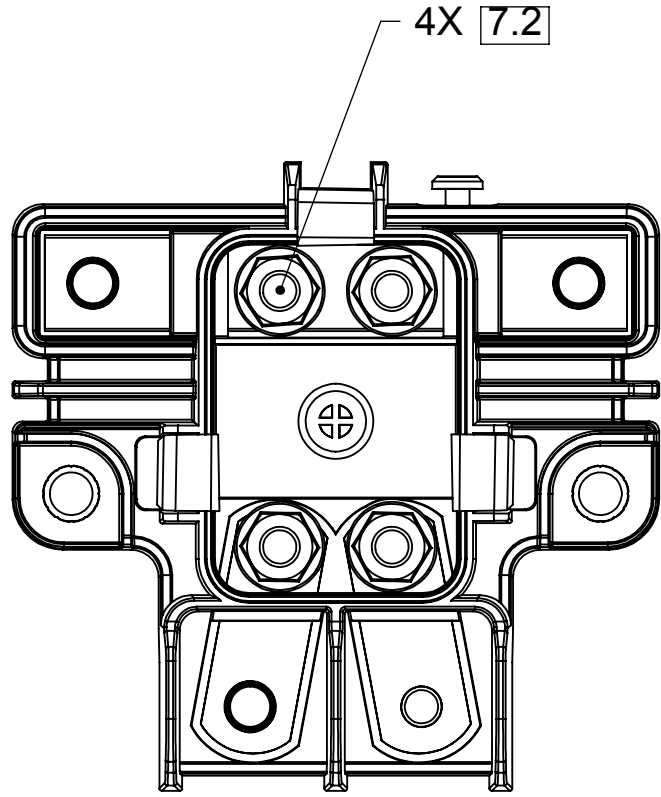
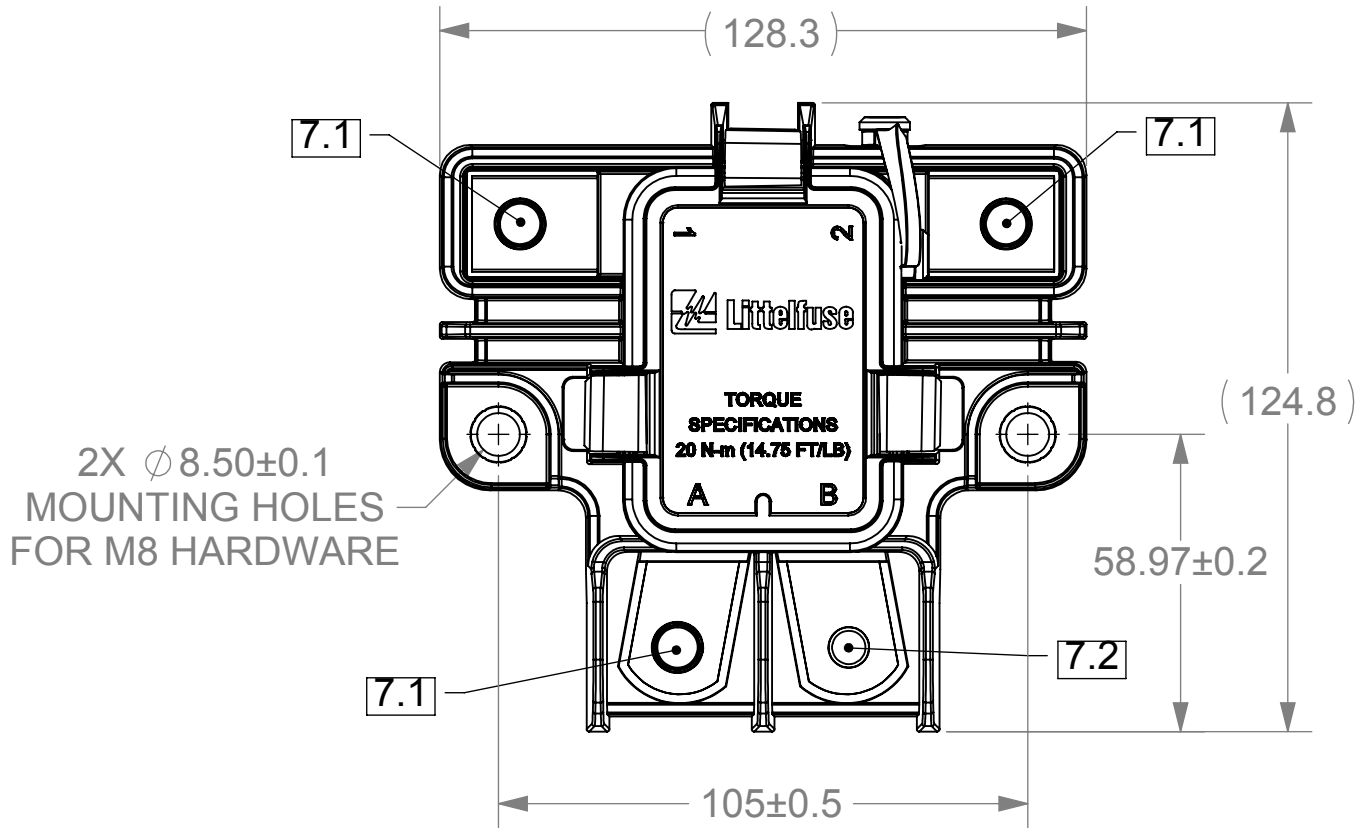



NOTES:

1. ALL STUDS TO BE STAINLESS STEEL WITH ROLLED THREADS
2. ALL BUS BARS TO BE TIN PLATED COPPER
3. WEIGHT EST 350 grams
4. RECOMMENDED TORQUE VALUES:
 1. MEGA FUSES - 15 N-m \pm 1.36 (11 ft-lb \pm 1)
 2. TERMINALS - 28.5 N-m \pm 1.36 (21 ft-lb \pm 1)
7. RECOMMENDED HARDWARE (TO BE INSTALLED AT LESS THAN 300 RPM);
 1. M10x1.50 18-8 STAINLESS STEEL
 2. M8x1.25 18-8 STAINLESS STEEL
8. LOCATION OF GORE VENT
9. MATERIAL:
HOUSING: GLASS FILLED NYLON 94V-0 COVER: GLASS FILLED PC 94V-0
10. MIN/MAX TEMPERATURE RATING: OPERATIONAL: -50C~105C NON-OPERATIONAL: -55C~125C
11. MAX CURRENT INPUT: 600 AMPS
12. MAX ASSEMBLY TORQUE (PRODUCT TO MOUNTING SURFACE): 30 N-m






REVISIONS			
ZONE	REV.	DESCRIPTION	DATE
	A	PER EC#515478: INITIAL RELEASE	2/19/2016
			J. LIU

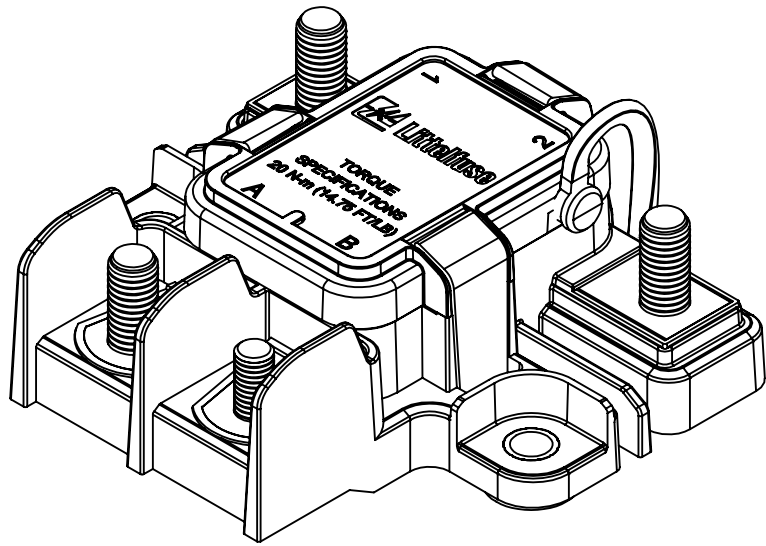

FUSE COVER REMOVED

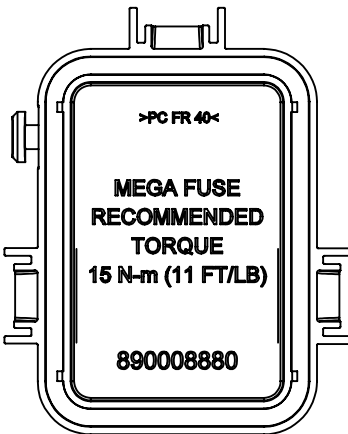

INSIDE FUSE COVER

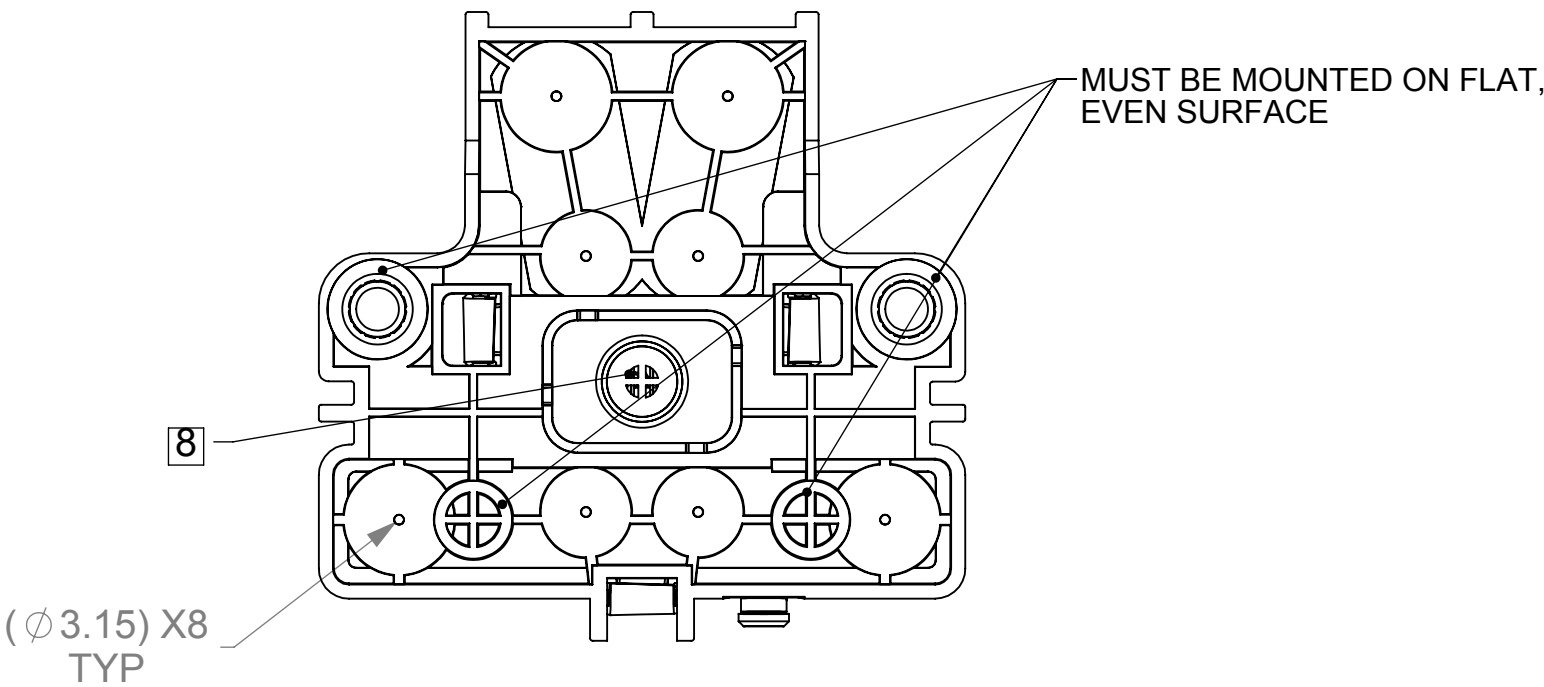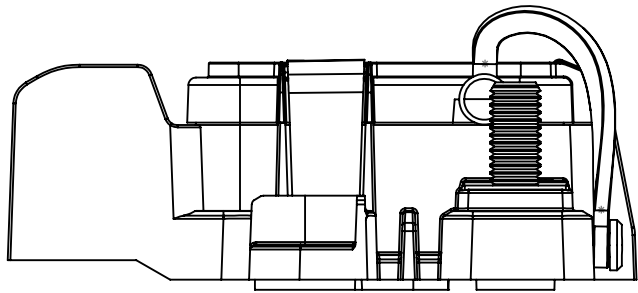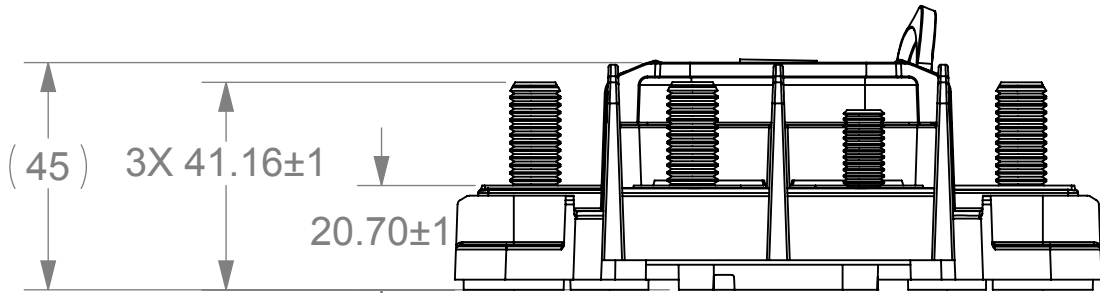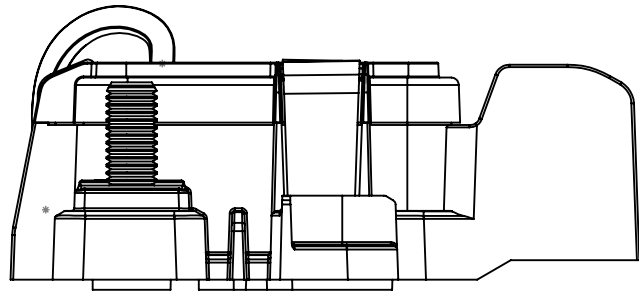

DIMENSIONS ARE IN MM.
DIMENSIONS AND TOLERANCES
ARE DEFINED ACCORDING TO
ANSI / ASME Y14.5M-1994
THIS DRAWING AND THE
INFORMATION CONTAINED WITHIN
IT ARE CONFIDENTIAL AND MAY
NOT BE COPIED OR DISCLOSED
WITHOUT THE WRITTEN
PERMISSION OF LITTELFUSE.

DRAWN	NAME	DATE
J. LIU		2/19/2016
CHECKED		
-	-	-
-	-	-
-	-	-
-	-	-

805 W. Orchard Dr., Ste. 6, Bellingham, WA 98225 Phone (360)738-9010 Fax (360)738-0372	
PDM 2 Position - Market	
SIZE C	DWG. NO. OL-880195400
SCALE 2:3	REV. A