


[69.85] 2.750

2 x 3/8-16 UNC-TREADED STUDS

FOR 3/8"(M10)

TERMINAL CONNECTIONS

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	Α	INITIAL DRAWING RELEASE	4/25/2011	J. KAUFMAN
	В	PER EC#517460: UPDATING DRAWING BY TRANSFERING INTO THE LITTELFUSE TEMPLATE	4/25/2017	J. LIU

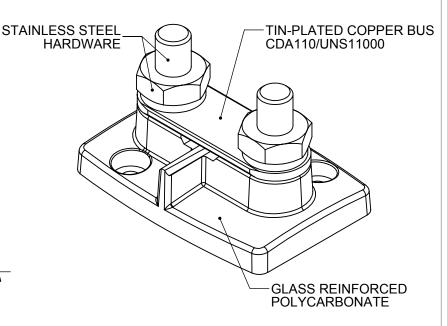

NOTES;

41.28

1.625

21.54

.848

- 1. CONTINOUS RATING: AMPERAGE RATING IS DETERMINED BY WIRE AMPERAGE CAPACITY CONNECTED TO THE BUSBAR, UP TO 600A.
- 2. VOLTAGE MAXIMUM OPERATING: 48 VOLTS DC

