


MM IN
 1.01 .040
 1.52 .060
 1.65 .065
 2.79 .110
 9.14 .360
 9.39 .370
 10.41 .410
 10.54 .415
 16.46 1.790
 46.48 1.830
 2.36 .093
 3.17 .125

APPLICABLE SAE STANDARD OR
 RECOMMENDED PRACTICE SAE J269

956-4311

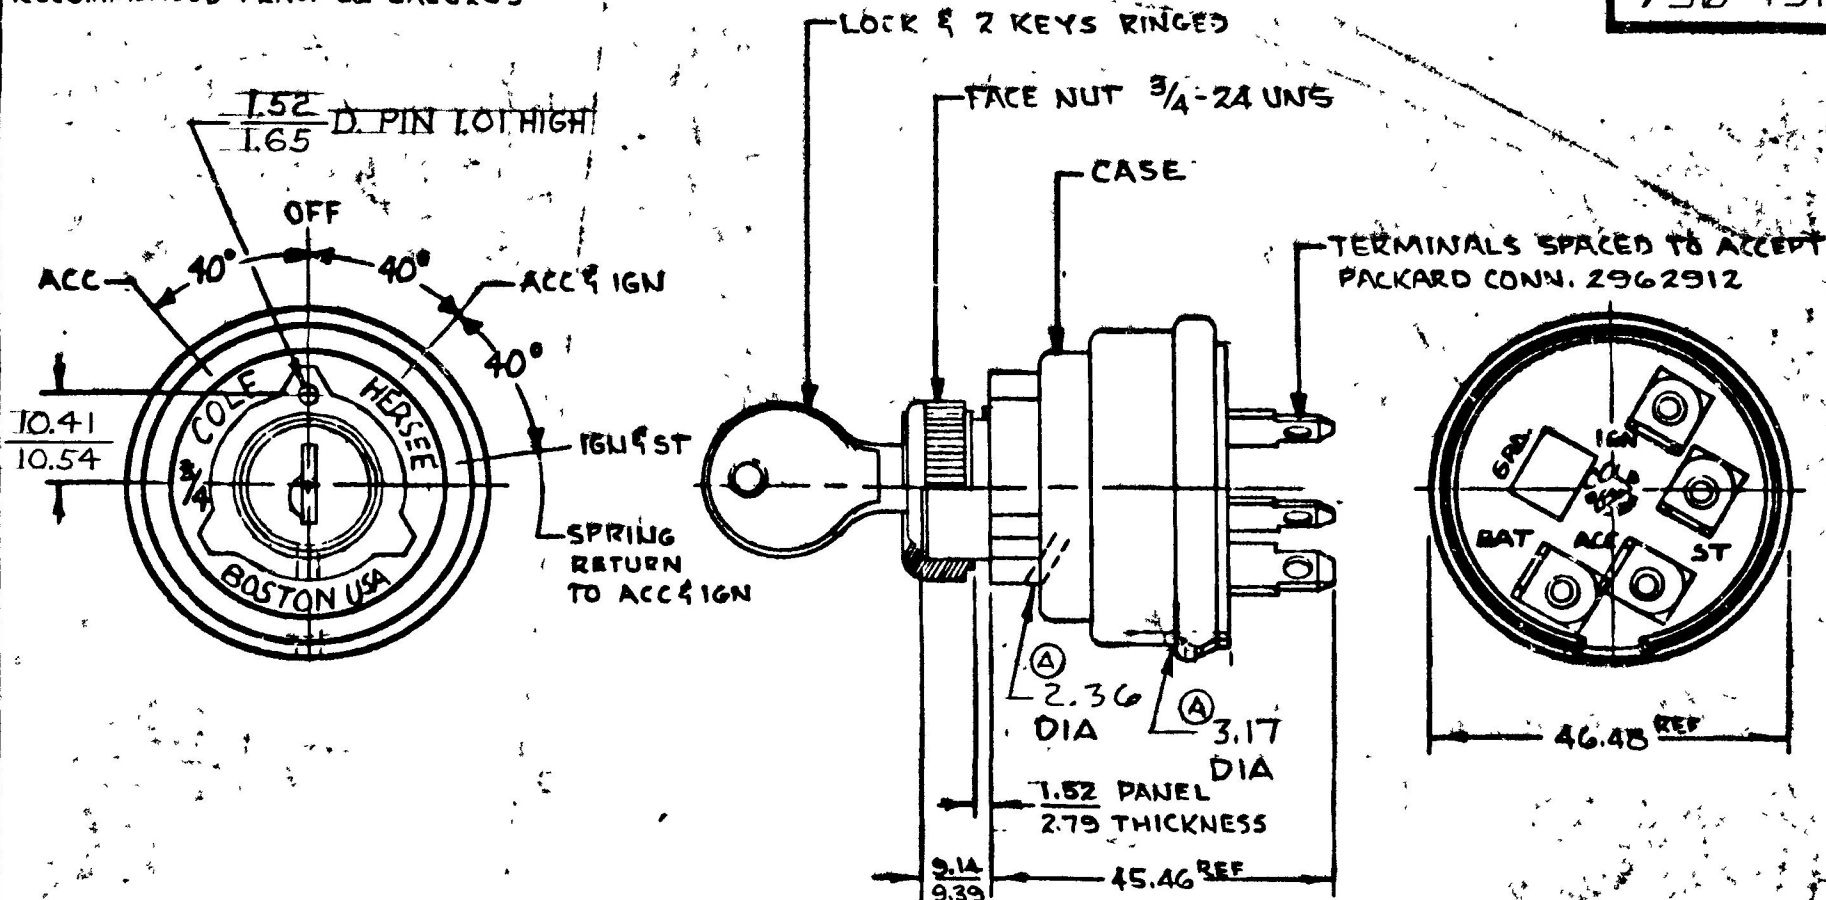

NOTES:

1. SHUTTER SEAL ON LOCK FACE
2. LOCK O RING SEALED TO CASE
3. TERM. INSULATOR GASKET SEALED
- ④ 4. DRAIN HOLES ARE IN LINE
 90° FROM ϕ SHOWN

ST	5 AMPS
IGN	10 AMPS
ACC	10 AMPS

RATING @ 12V DC

METRIC

DO NOT SCALE

LET	WAS	DATE	BY	LET	WAS	DATE	BY	MATERIAL	DRAWN	CHECKED	APPROVED	SCALE	DATE DRAWN
								—H—	RJF	RFB		1"=1"	6-17-83
								FINISH					DATE BLUEPRINT
								—H—					
				A	ADD'D DIM.	7-2-83	WBS	TOLERANCES					
					ECN 727.01			DECIMAL $\pm .010$					
					ISSUED	7/2/83	LB	METRIC ± 2.54					

CH. Cole Hersee Co.
 1000 WEST 10TH AVENUE, ST. LOUIS, MO. 63104

4 POSITION
 IGNITION & START SWITCH

956-4311