



THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.

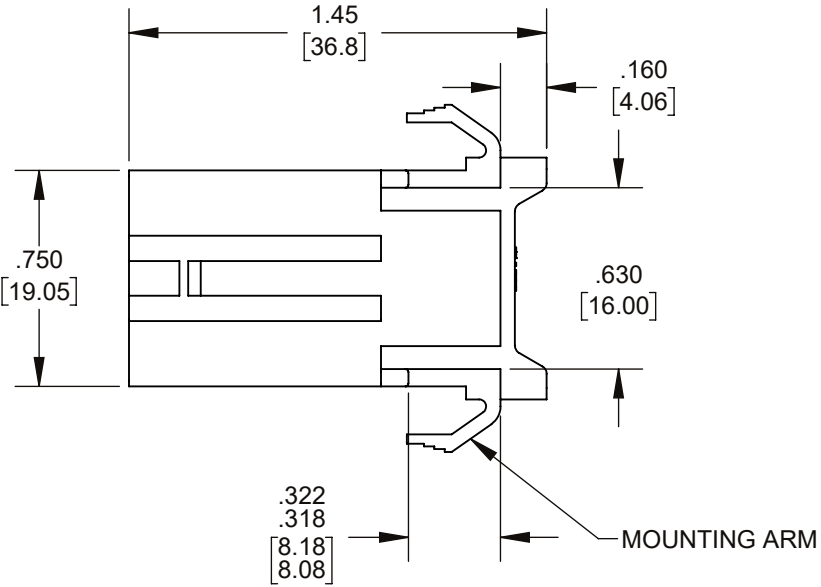

NOTES:
1. MATERIAL: FLAME RETARDANT POLYAMIDE

REVISIONS

ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	PCO #5300031. INITIAL RELEASE. DSILVA	3/7/2022	S.CASTILLO

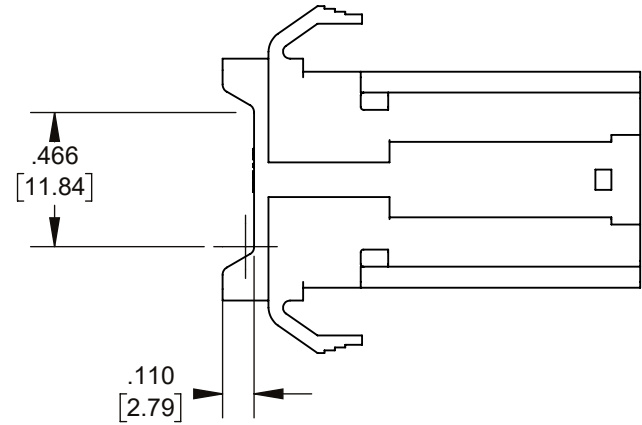


TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-M)

.5 to 3	>3 to 6	>6 to 30	>30 to 120	>120 to 400								ANGLE
±0.10	±0.10	±0.20	±0.30	±0.50								±0.5°

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14.5-1994.

PER CHI-NPD20-0008 PROCEDURE	●	FIT/ FUNCTION CRITICAL CHARACTERISTICS
	<S>	SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL
	CPK	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE
	ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
	CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

	NAME	DATE	Littelfuse Expertise Applied Answers Delivered			
DRAWN	DSILVA	2/16/2022				
CHECKED	S.CASTILLO	3/7/2022				
	-	-				
	-	-	TITLE ATO FUSE HOLDER BODY UL			
FORM NO: CVP-PE40-0001 REV B						
THIRD ANGLE PROJECTION						
			SIZE B	DWG. NO. OUTLINE	OL-868-062-000UL	REV. A
DO NOT SCALE DRAWING			SCALE 1:1			SHEET 1 OF 1