MM	IN
2.79	.110
3.04	.120
4.82	.190
11.17	.440
12.70	.500
19.81	.780
23.87	.940
39.11	1.54
42.92	1.69
50.80	2.00
52.57	2.07

95521
CHART

APPLICABLE SAE STANDARD OR RECOMMENDED PRACTICE SAE J259

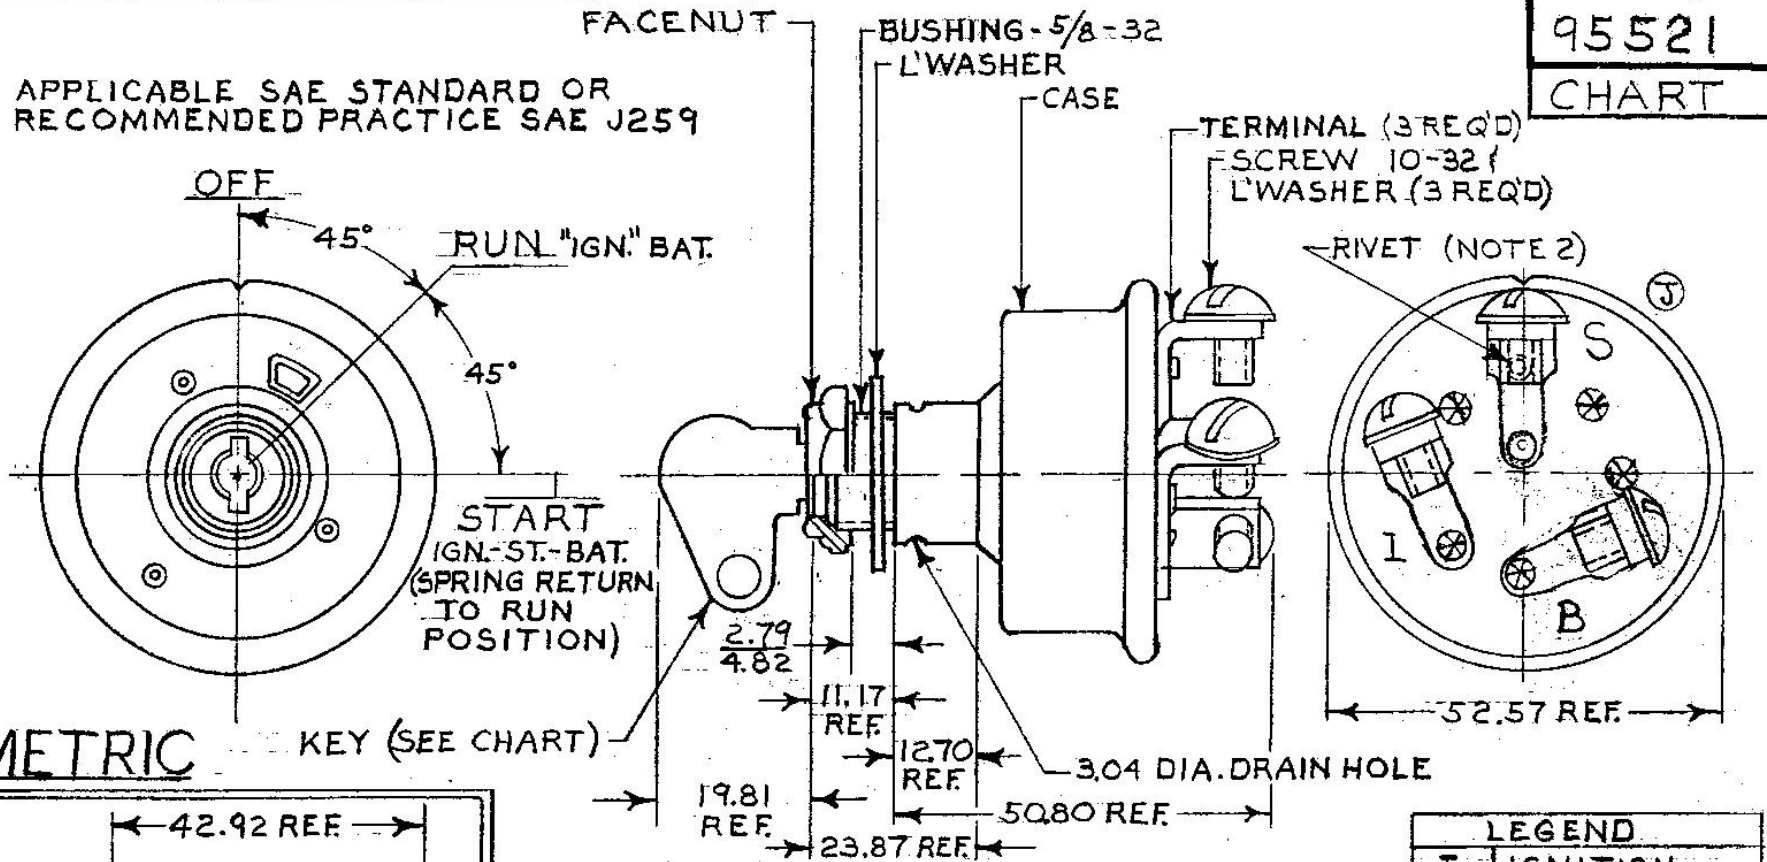

"A" TYPE SWITCH SHOWN

METRIC

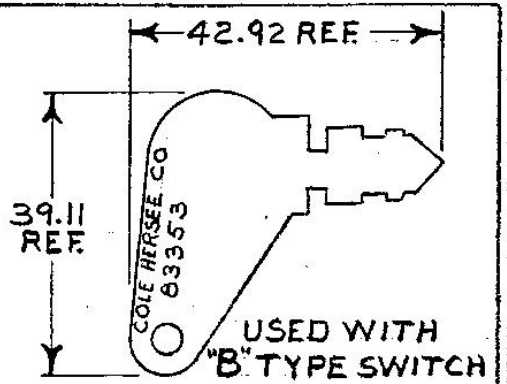

USED WITH "B" TYPE SWITCH

OPTIONAL KEY

NOTES:
1. KEY REMOVABLE IN "OFF" POSITION ONLY.
2. SILVER LAMINATED CONTACT SURFACES AT START POSITION.
3. "O" RING SEALED AT MTG. STEM.
4. DESIGNED FOR MAX. OF 70 AMP AT "START" CIRCUIT (MAY PERMIT ELIMINATION OF SOLENOID.
5. ALL STEEL PARTS PLATED.
6. RATING: 70 AMPS @ 12VDC (COMBINED LOAD).

LEGEND	
I	IGNITION
S	START
B	BATTERY

SWITCH NO.	KEY PART NO.
95521-B	83353 2 KEYS RINGED
95521-A	83357 2 KEYS RINGED
95521 BASIC	———

DO NOT SCALE

LET.	WAS	DATE	BY	LET	WAS	DATE	BY
				J	REVETS # 02009	1/10/02	SR
				H	ECN 01041	1-17-91	MB
				G	REDRAWN	9-6-84	VAK

MATERIAL

FINISH

TOLERANCES
DECIMAL ±
METRIC ±

DRAWN	CHECKED	APPRV'D.	SCALE
PH	T.N.		1:1

Cole Hersee Co.
28 OLD COLONY AVENUE, SOUTH BOSTON, MA., U.S.A. 02127

DATE DRAWN 11-26-62

DATE BLUEPRINT

SWITCH, IGN. & ST., 3 POS. 95521

Confidential Property of Cole Hersee