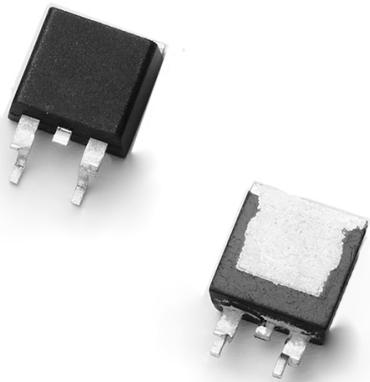
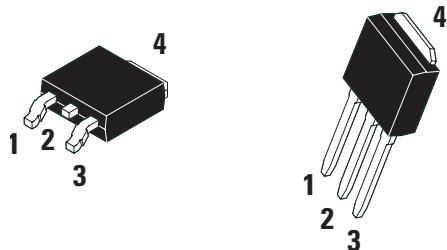



**MAC4DCM, MAC4DCN****Description**

The MAC4DCM and MAC4DCN are designed for high volume, low cost, industrial and consumer applications such as motor control; process control; temperature, light and speed control.

**Features**

- Small Size Surface Mount DPAK Package
- Passivated Die for Reliability and Uniformity
- Blocking Voltage to 800 V
- On-State Current Rating of 4.0 A RMS at 108°C
- High Immunity to dv/dt – 500 V/μs at 125°C
- High Immunity to di/dt – 6.0 A/ms at 125°C
- Epoxy Meets UL 94 V-0 @ 0.125 in
- ESD Ratings: Human Body Model, 3B > 8000V Machine Model, C > 400V
- Lead-free Packages are Available

**Pin Out****Functional Diagram**

# Thyristors

Surface Mount – 600V - 800V &gt; MAC4DCM, MAC4DCN

## Maximum Ratings ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Peak Repetitive Off-State Voltage (Note 1) (Gate Open, Sine Wave 50 to 60 Hz, $T_J = -40^\circ\text{C}$ to $125^\circ\text{C}$ )	$V_{DRM}$ $V_{RRM}$	600 800	V
On-State RMS Current (Full Cycle Sine Wave, 60 Hz, $T_c = 108^\circ\text{C}$ )	$I_T(\text{RMS})$	4.0	A
Peak Non-Repetitive Surge Current (One Full Cycle Sine Wave, 60 Hz, $T_c = 125^\circ\text{C}$ )	$I_{TSM}$	40	A
Circuit Fusing Consideration ( $t = 8.3 \text{ msec}$ )	$I^2t$	6.6	$\text{A}^2\text{sec}$
Peak Gate Current (Pulse Width $\leq 20 \mu\text{sec}$ , $T_c = 108^\circ\text{C}$ )	$I_{GM}$	4.0	A
Peak Gate Power (Pulse Width $\leq 10 \mu\text{sec}$ , $T_c = 108^\circ\text{C}$ )	$P_{GM}$	2.0	W
Average Gate Power ( $t = 8.3 \text{ msec}$ , $T_c = 108^\circ\text{C}$ )	$P_{G(AV)}$	1.0	W
Operating Junction Temperature Range	$T_J$	-40 to +125	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-40 to +150	$^\circ\text{C}$

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1.  $V_{DRM}$  and  $V_{RRM}$  for all types can be applied on a continuous basis. Ratings apply for zero or negative gate voltage; however, positive gate voltage shall not be applied concurrent with negative potential on the anode. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.

## Thermal Characteristics

Rating	Symbol	Value	Unit
Junction-to-Case (AC)	$R_{JC}$	3.5	
Thermal Resistance, Junction-to-Ambient	$R_{JA}$	88	$^\circ\text{C}/\text{W}$
Junction-to-Ambient (Note 2)	$R_{JA}$	80	
Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds	$T_L$	260	$^\circ\text{C}$

2. These ratings are applicable when surface mounted on the minimum pad sizes recommended.

3. 1/8" from case for 10 seconds.

## Electrical Characteristics - OFF ( $T_J = 25^\circ\text{C}$ unless otherwise noted ; Electricals apply in both directions)

Characteristic	Symbol	Min	Typ	Max	Unit
Peak Repetitive Blocking Current ( $V_D = V_{DRM} = V_{RRM}$ ; Gate Open)	$I_{DRM}$ $I_{RRM}$	-	-	0.005 2.0	mA

## Electrical Characteristics - ON ( $T_J = 25^\circ\text{C}$ unless otherwise noted; Electricals apply in both directions)

Characteristic	Symbol	Min	Typ	Max	Unit
Peak On-State Voltage (Note 4) ( $I_{TM} = \pm 6.0 \text{ A}$ )	$V_{TM}$	-	1.3	1.6	V
Gate Trigger Current (Continuous dc) ( $V_D = 12 \text{ V}$ , $R_L = 100 \Omega$ )	$I_{GT}$	8.0	12	35	mA
		8.0	18	35	
		8.0	22	35	
		-	-	-	
Holding Current ( $V_D = 12 \text{ V}$ , Gate Open, Initiating Current = $\pm 200 \text{ mA}$ )	$I_H$	6.0	22	35	mA
Latching Current ( $V_D = 12 \text{ V}$ , $I_G = 35 \text{ mA}$ )	$I_L$	-	30	60	mA
		-	50	80	
		-	20	60	
Gate Trigger Voltage (Continuous dc) ( $V_D = 12 \text{ V}$ , $R_L = 100 \Omega$ )	$V_{GT}$	0.5	0.8	1.3	V
		0.5	0.8	1.3	
		0.5	0.8	1.3	
Gate Non-Trigger Voltage ( $T_J = 125^\circ\text{C}$ ) ( $V_D = 12 \text{ V}$ , $R_L = 100 \Omega$ )	$V_{GD}$	0.2	0.4	-	V
		0.2	0.4	-	
		0.2	0.4	-	

4. Indicates Pulse Test: Pulse Width  $\leq 2.0 \text{ ms}$ , Duty Cycle  $\leq 2\%$ .

# Thyristors

Surface Mount – 600V - 800V &gt; MAC4DCM, MAC4DCN

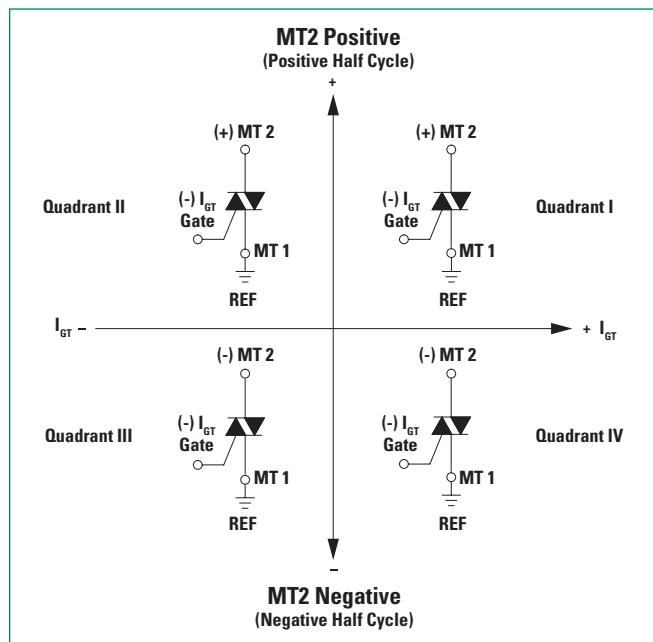
## Dynamic Characteristics

Characteristic	Symbol	Min	Typ	Max	Unit
Rate of Change of Commutating Current ( $V_D = 400$ V, $I_{TM} = 4.0$ A, Commutating $dv/dt = 4.8$ V/ $\mu$ sec, Gate Open, $T_J = 125^\circ\text{C}$ , $f = 250$ Hz, $C_L = 5.0$ $\mu$ F, $LL = 20$ mH, No Snubber) (See Figure 16)	$(dl/dt)_C$	4.0	5	—	A/ms
Critical Rate of Rise of Off-State Voltage ( $V_D = 0.67 \times V_{DRM}$ , Exponential Waveform, Gate Open, $T_J = 125^\circ\text{C}$ )	$dV/dt$	500	1700	—	V/ $\mu$ s


## Voltage Current Characteristic of SCR

Symbol	Parameter
$V_{DRM}$	Peak Repetitive Forward Off State Voltage
$I_{DRM}$	Peak Forward Blocking Current
$V_{RRM}$	Peak Repetitive Reverse Off State Voltage
$I_{RRM}$	Peak Reverse Blocking Current
$V_{TM}$	Maximum On State Voltage
$I_H$	Holding Current

## Quadrant Definitions for a Triac









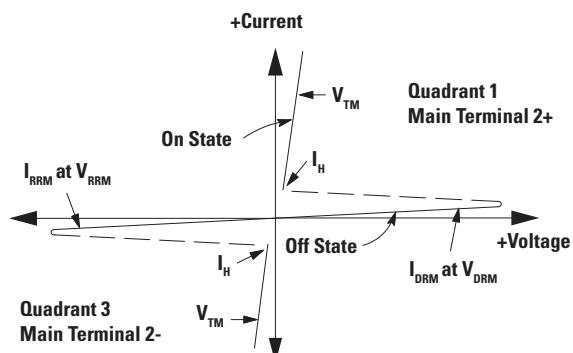All Polarities are referenced to MT1.  
With in-phase signals (using standard AC lines) quadrants I and III are used









# Thyristors

Surface Mount – 600V - 800V &gt; MAC4DCM, MAC4DCN

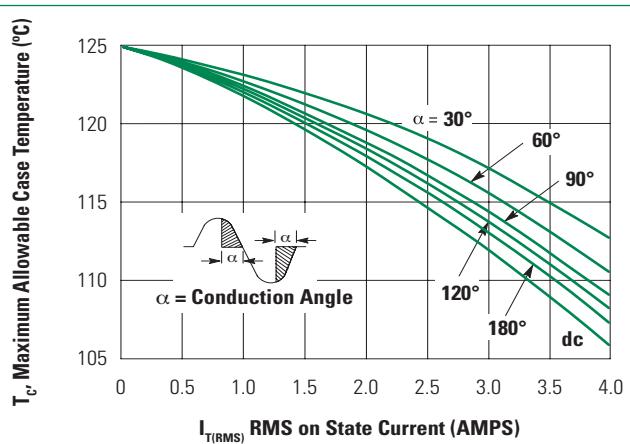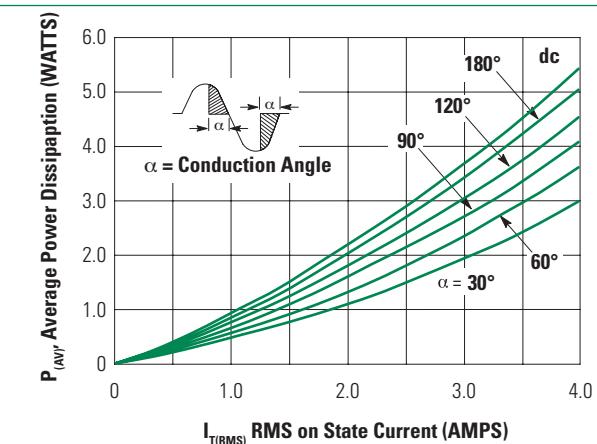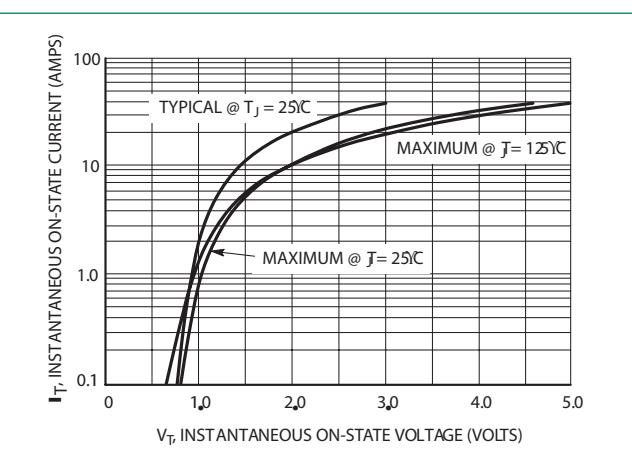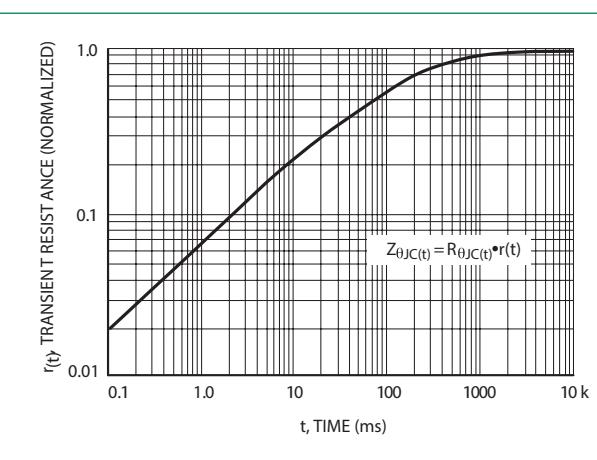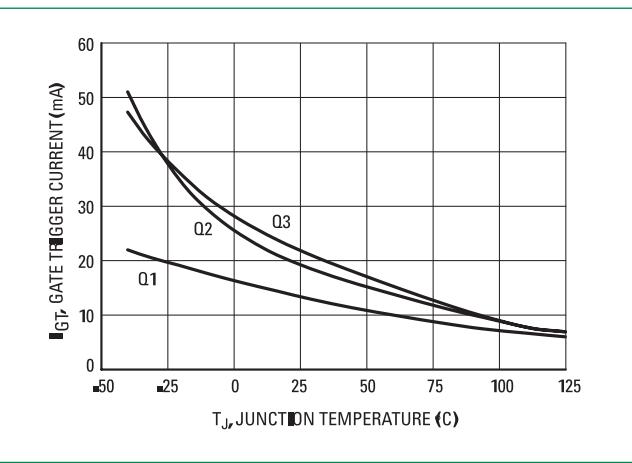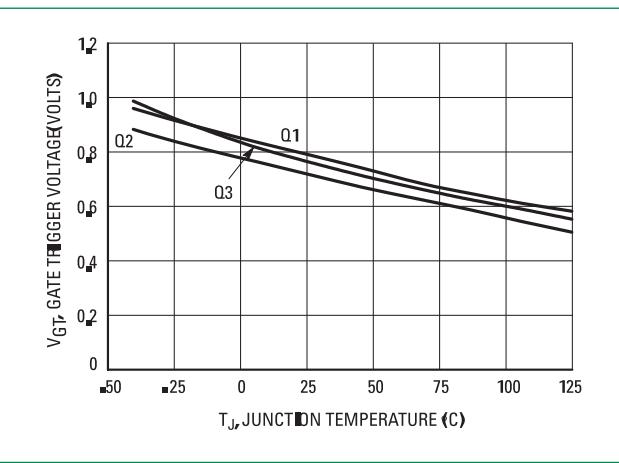**Figure 1. Typical RMS Current Derating**

**Figure 2. On-State Power Dissipation**

**Figure 3. On-State Characteristics**

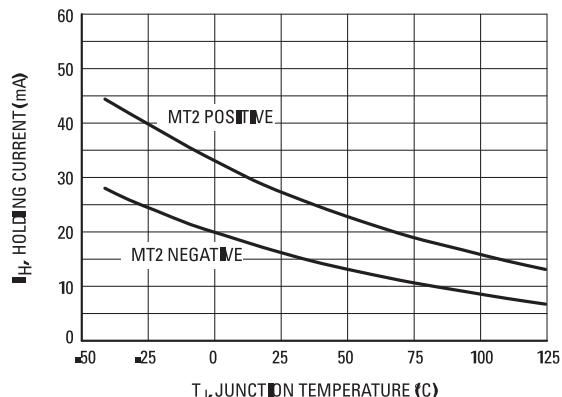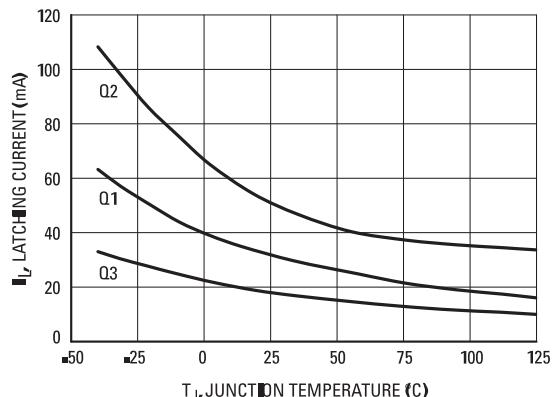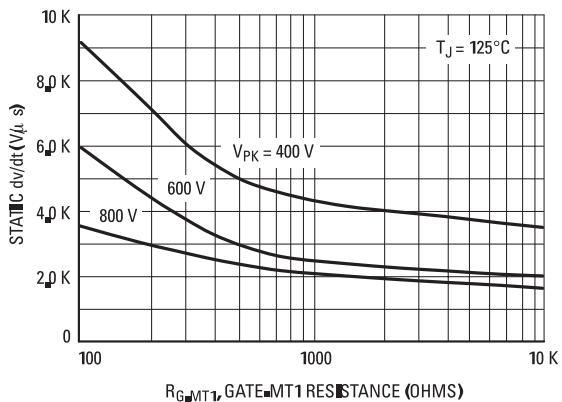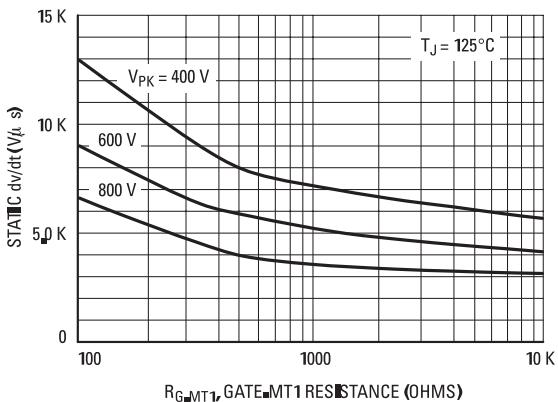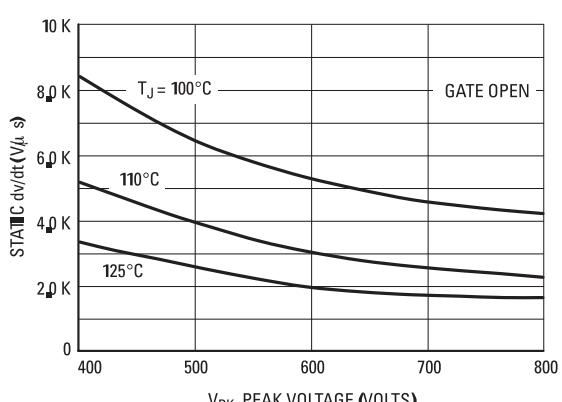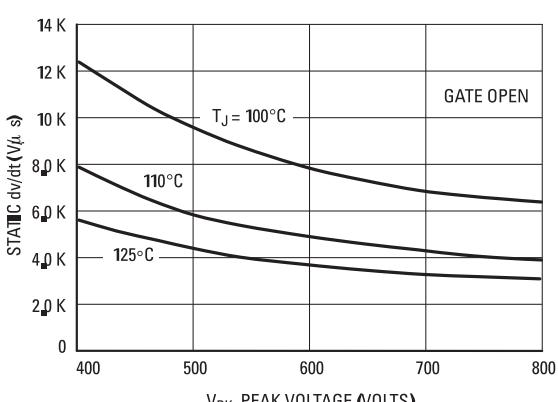**Figure 4. Transient Thermal Response**

**Figure 5. Typical Gate Trigger Current vs. Junction Temperature**

**Figure 6. Typical Gate Trigger Voltage vs. Junction Temperature**


# Thyristors

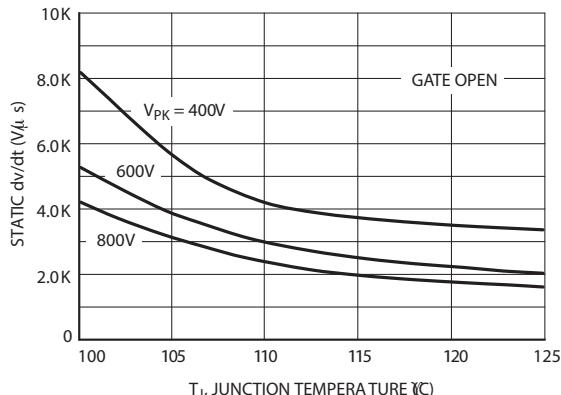
Surface Mount – 600V - 800V &gt; MAC4DCM, MAC4DCN

**Figure 7. Typical Holding Current vs. Junction Temperature**

**Figure 8. Typical Latching Current vs. Junction Temperature**

**Figure 9. Exponential Static dv/dt vs. Gate-MT1 Resistance, MT2(+)**

**Figure 10. Exponential Static dv/dt vs. Gate-MT1 Resistance, MT2(-)**

**Figure 11. Exponential Static dv/dt vs. Peak Voltage, MT2(+)**

**Figure 12. Exponential Static dv/dt vs. Peak Voltage, MT2(-)**


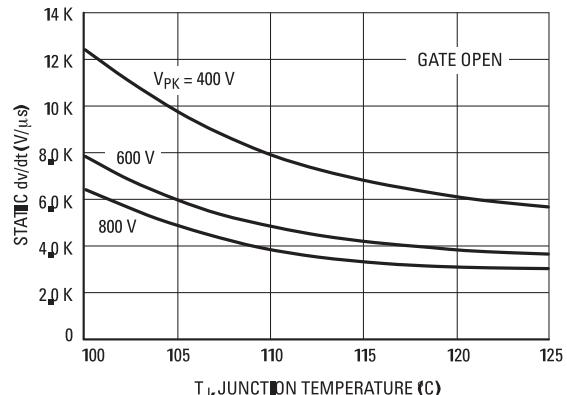
# Thyristors

Surface Mount – 600V - 800V &gt; MAC4DCM, MAC4DCN


**Figure 13. Typical Exponential Static dv/dt vs.Junction Temperature, MT2(+)**




**Figure 13. Typical Exponential Static dv/dt vs.Junction Temperature, MT2(-)**



**Figure 15. Critical Rate of Rise of Commutating Voltage**

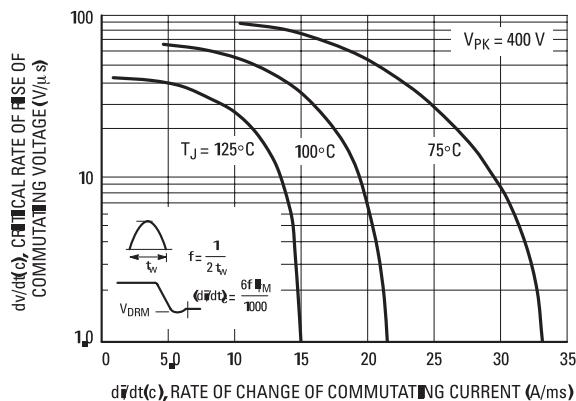

**Figure 16. Simplified Test Circuit to Measure the Critical Rate of Rise of Commutating Current (di/dt)c**

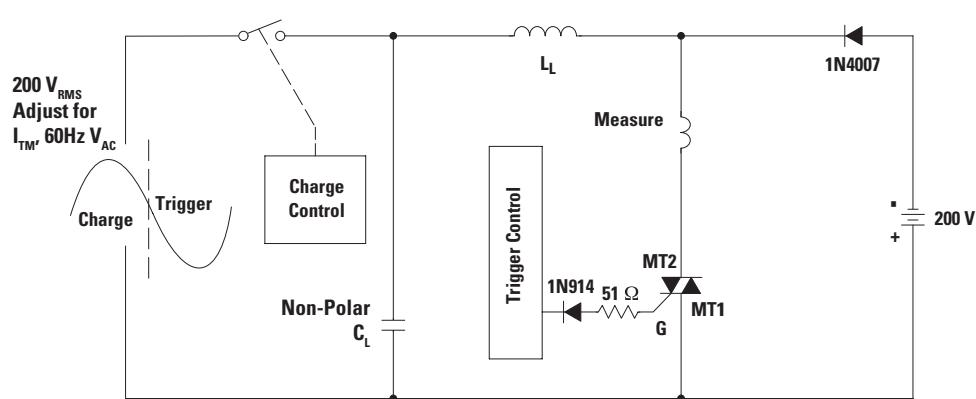


**Note:** Component values are for verification of rated (di/dt)c. See AN1048 for additional information


# Thyristors

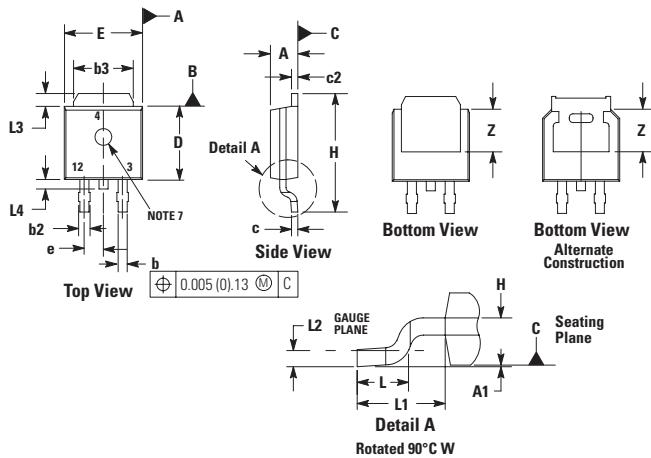Surface Mount – 600V - 800V &gt; MAC4DCM, MAC4DCN

## Dimensions



## Soldering Footprint

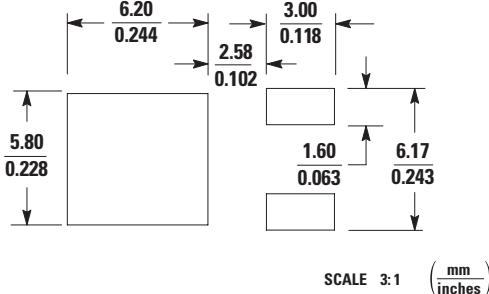
 SCALE 3:1 ( $\frac{\text{mm}}{\text{inches}}$ )


Dim	Inches		Millimeters	
	Min	Max	Min	Max
A	0.087	0.094	2.20	2.40
A1	0.000	0.005	0.00	0.12
b	0.022	0.030	0.55	0.75
b2	0.026	0.033	0.65	0.85
b3	0.209	0.217	5.30	5.50
c	0.019	0.023	0.49	0.59
c2	0.019	0.023	0.49	0.59
D	0.213	0.224	5.40	5.70
E	0.252	0.260	6.40	6.60
e	0.091		2.30	
H	0.374	0.406	9.50	10.30
L	0.058	0.070	1.47	1.78
L1	0.114		2.90	
L2	0.019	0.023	0.49	0.59
L3	0.053	0.065	1.35	1.65
L4	0.028	0.039	0.70	1.00
Z	0.154	-	3.90	-

# Thyristors

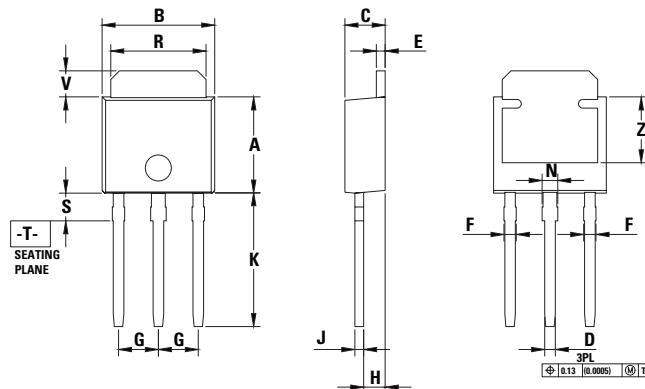
Surface Mount – 600V - 800V > MAC4DCM, MAC4DCN

## Dimensions



**DPAK-3**  
Case 369D  
**T0251-3L POD**




## Part Marking System



**DPAK-3**  
Case 369C  
Style 6



**DPAK-3**  
Case 369D  
Style 6



**AC4DCx** =Device Code  
**x** =D, M, or N  
**Y** =Year  
**M** =Month  
**A** =Assembly Site  
**XX** =Lot Serial Code  
**G** =Pb-Free Package

Dim	Inches		Millimeters	
	Min	Max	Min	Max
<b>A</b>	0.213	0.224	5.40	5.70
<b>B</b>	0.252	0.260	6.40	6.60
<b>C</b>	0.087	0.094	2.20	2.40
<b>D</b>	0.024	0.030	0.60	0.75
<b>E</b>	0.022	0.026	0.55	0.65
<b>F</b>	0.022	0.03	0.58	0.78
<b>G</b>	0.091		2.30	
<b>H</b>	0.046	0.050	1.18	1.28
<b>J</b>	0.019	0.023	0.49	0.59
<b>K</b>	0.291	0.315	7.40	8.00
<b>N</b>	0.031	0.038	0.78	0.98
<b>R</b>	0.209	0.217	5.30	5.50
<b>S</b>	0.063		1.60	
<b>V</b>	0.053	0.065	1.35	1.65
<b>Z</b>	0.150		3.80	

1. Dimensioning and Tolerancing Per ANSI Y14.5M, 1982.

2. Controlling Dimension: Inch.

STYLE 6:Pin 1. MT1

2. MT2

3. Gate

4. MT2

## Pin Assignment

1	Main Terminal 1
2	Main Terminal 2
3	Gate
4	Main Terminal 2

## Ordering Information

Device	Package Type	Package	Shipping
MAC4DCM-001	DPAK-3	369D	4000 Units / Box
MAC4DCM-1G	DPAK-3 (Pb-Free)	369D	4000 Units / Box
MAC4DCMT4	DPAK-3	369C	2500 / Tape & Reel
MAC4DCMT4G	DPAK-3 (Pb-Free)	369C	2500 / Tape & Reel
MAC4DCN-001	DPAK-3	369D	4000 Units / Box
MAC4DCN-1G	DPAK-3 (Pb-Free)	369D	4000 Units / Box
MAC4DCNT4	DPAK-3	369C	2500 / Tape & Reel
MAC4DCNT4G	DPAK-3 (Pb-Free)	369C	2500 / Tape & Reel

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics)