CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED

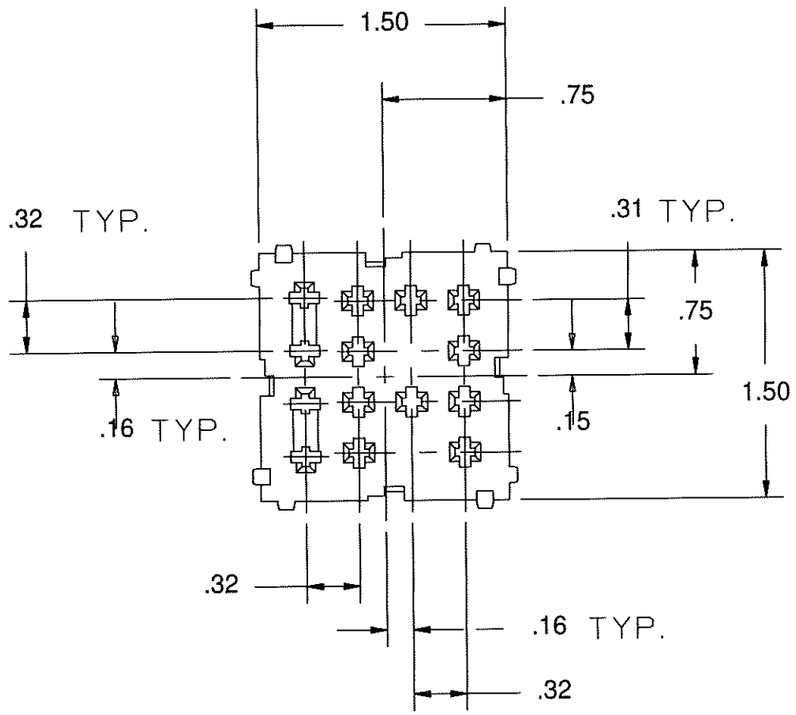

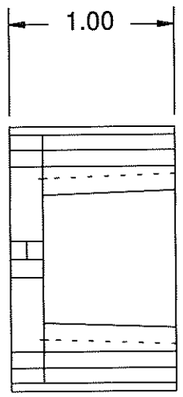

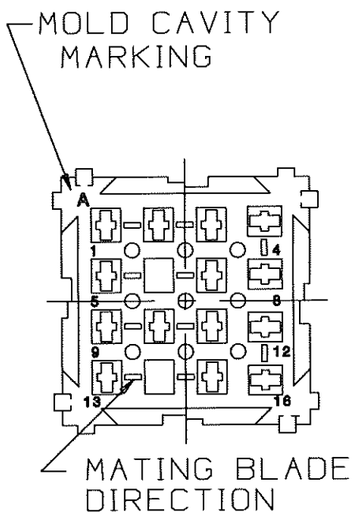

BILL OF MATERIAL

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

●	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS,-MINIMUM CPK VALUE
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE, PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS,-MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

MATL SPEC	
FINISH	
DRW	JCU
CHK	
APPD	
DATE	10/14/2009
SCALE	---
SUPER DRW	
RAW STK WT	LBS/M

TOLERANCE UNLESS OTHERWISE SPECIFIED
TWO PLACE DEC ±.01 FRACTION ±
THREE PLACE DEC ±.005 ANGULAR ±1°

COPIES TO: 1 9 18 / 2 10 19 / 3 12 20 / 4 13 21 / 5 14 23 / 6 15 33 / 7 16 43 / 8 17 53

TITLE: 2P 280 MICRO RELAY + 2P MINI FUSE MODULE

Littelfuse® DES PLAINES, ILLINOIS 60016

REVISION: A | DRWG. NO. 03540551Z | FINAL

LTR	REVISION	CHK	APD
A	000810ER - RELEASED		