



Parameter	Rating	Units
Blocking Voltage	60	V _P
Load Current	200	mA _{rms} / mA _{DC}
On-Resistance (max)	16	Ω
Input Voltage to operate	5-12	V

Features

- Designed for use in Security Systems Complying with EN50130-4
- Voltage-Controlled Operation
- 2500V_{rms} Input/Output Isolation
- 100% Solid State
- No EMI/RFI Generation
- Immune to Radiated EM Fields
- Small 4-Pin SIP Package
- Flammability Rating UL 94 V-0

Applications

- Security
 - Passive Infrared Detectors (PIR)
 - Data Signalling
 - Sensor Circuitry
- Instrumentation
- Multiplexers
- Data Acquisition
- Electronic Switching
- I/O Subsystems
- Energy Meters
- Medical Equipment—Patient/Equipment Isolation
- Industrial Controls

Description

The CPC1219Y is a voltage-controlled, single-pole, normally closed (1-Form-B) optically coupled solid state relay in a 4-pin Single In-line Package (SIP). IXYS Integrated Circuits Division's patented OptoMOS architecture makes available the optically coupled technology necessary to activate the output's efficient MOSFET switches while providing a 2500V_{rms} input-to-output isolation barrier. Control of the isolated output is accomplished by means of a highly efficient infrared LED at the input. An internal resistor in series with the LED enables the voltage-controlled operation of the input.

Because the input is solid state there is no need for snubbers or "catch" diodes to suppress the inductive fly-back transient voltage normally associated with EMR coils.

Approvals


- TUV EN 62368-1: Certificate # B 082667 0008

Ordering Information


Part #	Description
CPC1219Y	4-Pin SIP (8-Pin Body) (25/tube)

Pin Configuration

CPC1219Y Pinout



Switching Characteristics of Normally Closed Devices

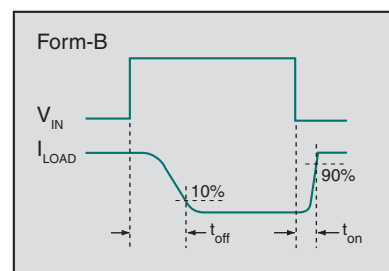

Absolute Maximum Ratings @ 25°C

Parameter	Ratings	Units
Blocking Voltage	60	V _P
Reverse Input Voltage	5	V
Input Control Voltage	15	V
Input Power Dissipation	225	mW
Total Power Dissipation ¹	800	mW
Isolation Voltage, Input to Output	2500	V _{rms}
Operational Temperature, Ambient	-40 to +85	°C
Storage Temperature	-40 to +125	°C

¹ Derate output power linearly 6.67 mW / °C

Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at conditions beyond those indicated in the operational sections of this data sheet is not implied.

Typical values are characteristic of the device at +25°C, and are the result of engineering evaluations. They are provided for information purposes only, and are not part of the manufacturing testing requirements.

Electrical Characteristics @ 25°C


Parameter	Conditions	Symbol	Min	Typ	Max	Units
Output Characteristics						
Blocking Voltage	I _L =1μA,	V _{DRM}	60	-	-	V
Load Current						
Continuous ¹	-	I _L	-	-	200	mA _{rms} / mA _{DC}
Peak	t≤10ms	I _{LPK}	-	-	±400	mA _p
On-Resistance ²	V _{IN} =0V, I _L =200mA	R _{ON}	-	-	16	Ω
Off-State Leakage Current	V _{IN} =5V, V _L =60V _P	I _{LEAK}	-	-	1	μA
Switching Speeds						
Turn-On (Output Closed)	V _{IN} = 5V, V _L = 10V	t _{on}	-	-	5	ms
Turn-Off (Output Open)		t _{off}	-	-	5	ms
Output Capacitance	V _{IN} =5V, V _L =50V, f=1MHz	C _{OUT}	-	25	-	pF
Input Characteristics						
Input Control Voltage						
Recommended Operating Range	I _L =200mA	V _{IN}	5	-	12	V
Output Open			-	-	3.75	
Output Closed			1	-	-	
Reverse Input Current	V _{IN} = -5V	I _R	-	-	10	μA
Input Resistor	-	-	900	1000	1100	Ω
Common Characteristics						
Capacitance, Input to Output	V _{IO} =0V, f=1MHz	C _{IO}	-	1	-	pF

¹ Load current derates linearly from 200mA @ 25°C to 125mA @ 85°C.


² Measurement taken within 1 second of on-time.

PERFORMANCE DATA *


Typical Turn-On Time
(N=50, $V_{IN}=5V$, $I_L=100mA$, $T_A=25^\circ C$)

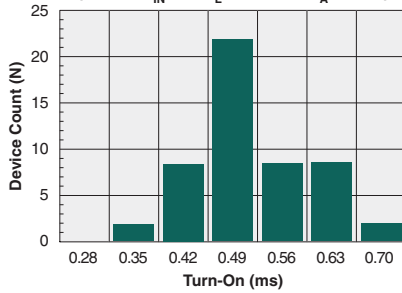


Typical Turn-Off Time
(N=50, $V_{IN}=5V$, $I_L=100mA$, $T_A=25^\circ C$)

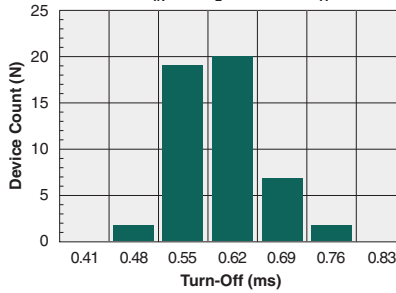


Typical On-Resistance Distribution
(N=50, $V_{IN}=0V$, $I_L=100mA$, $T_A=25^\circ C$)

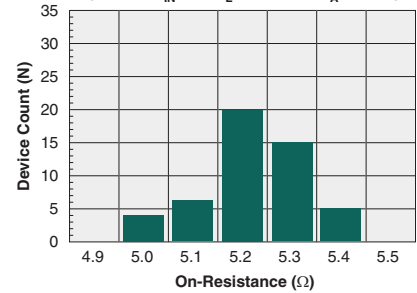


Typical V_{IN} for Switch Operation
(N=50, $I_L=100mA$, $T_A=25^\circ C$)

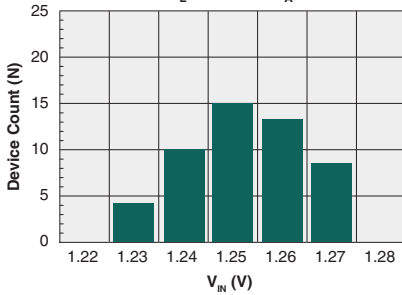


Typical V_{IN} for Switch Dropout
(N=50, $I_L=100mA$, $T_A=25^\circ C$)

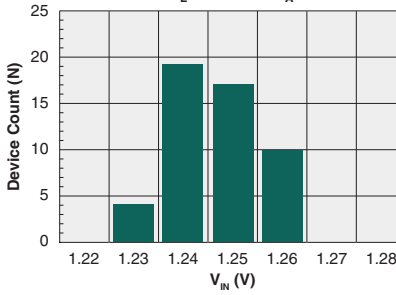


Typical Blocking Voltage Distribution
(N=50, $V_{IN}=5V$, $T_A=25^\circ C$)

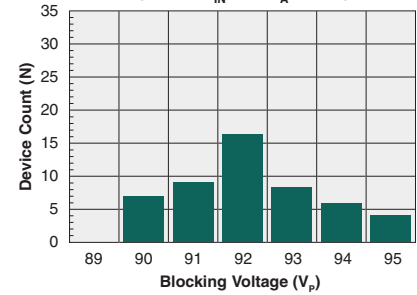


Typical Turn-On vs. V_{IN}
($I_L=100mA$, $T_A=25^\circ C$)

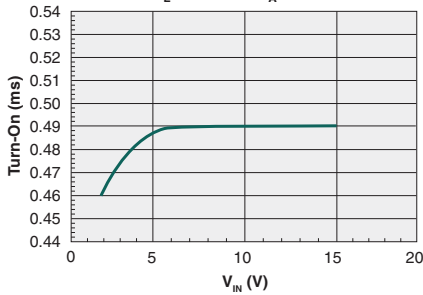


Typical V_{IN} for Switch Operation vs. Temperature
($I_L=100mA$)

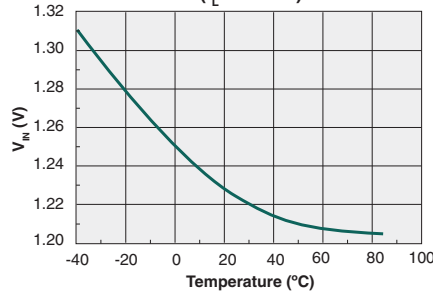


Typical Turn-On vs. Temperature
($V_{IN}=5V$, $I_L=100mA$)

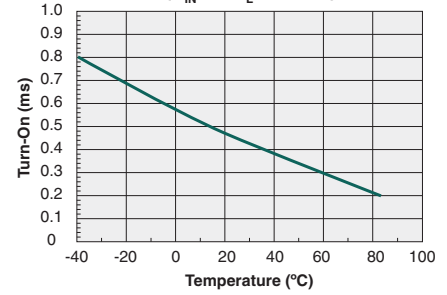


Typical Turn-Off vs. V_{IN}
($I_L=100mA$, $T_A=25^\circ C$)

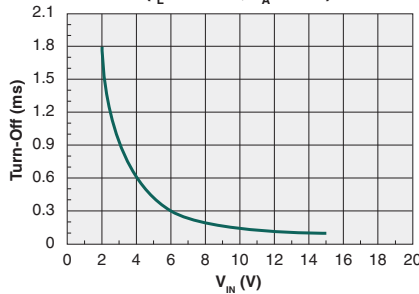

Typical V_{IN} for Switch Dropout vs. Temperature
($I_L=100mA$)

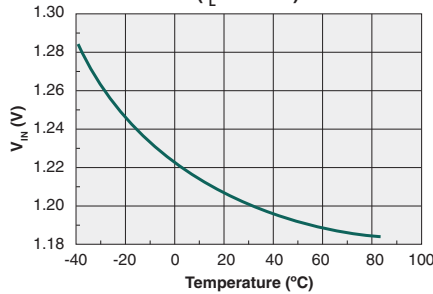


Typical Turn-Off vs. Temperature
($V_{IN}=5V$, $I_L=100mA$)

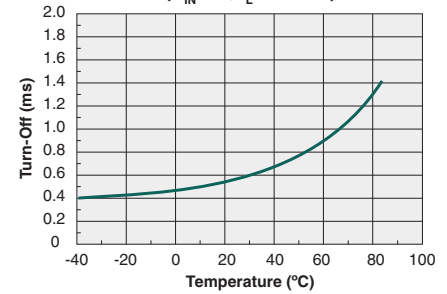


*Unless otherwise noted, data presented in these graphs is typical of device operation at 25°C.

PERFORMANCE DATA *


Typical On-Resistance vs. Temperature
($V_{IN}=0V, I_L=Max\ Rated\ @\ Temperature$)

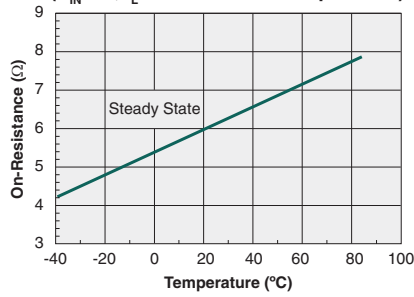


Typical Load Current vs. Load Voltage
($V_{IN}=0V, T_A=25°C$)

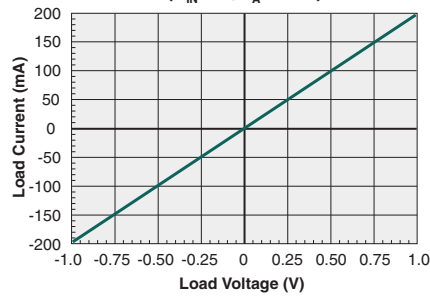


Typical Maximum Load Current vs. Temperature
($V_{IN}=0V$)

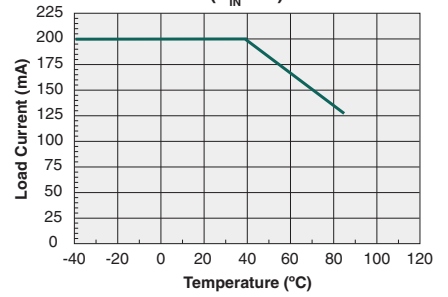


Typical Blocking Voltage vs. Temperature
($V_{IN}=5V$)

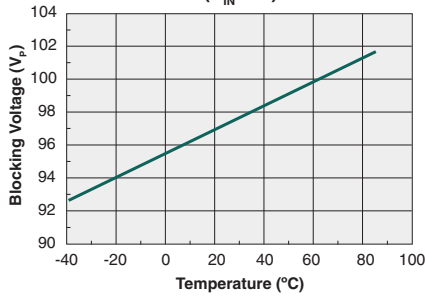

Typical Leakage vs. Temperature
Measured Across Pins 1&4
($V_{IN}=5V, V_L=60V$)

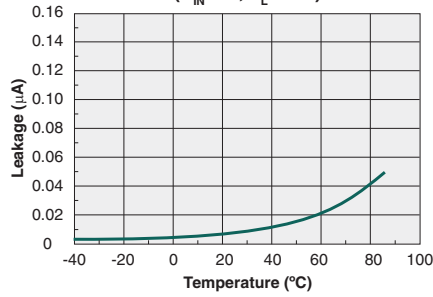

Energy Rating Curve

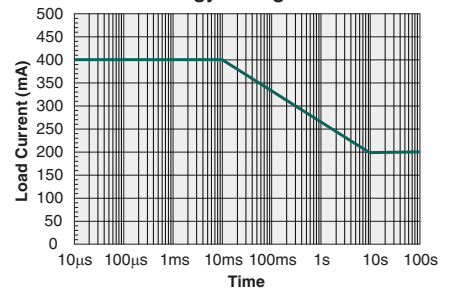

*Unless otherwise noted, data presented in these graphs is typical of device operation at 25°C.

Manufacturing Information

ESD Sensitivity



This product is ESD Sensitive, and should be handled according to the industry standard **JESD-625**.

Soldering Profile

For through-hole devices, the maximum pin temperature and maximum dwell time through all solder waves is provided in the table below. Dwell time is the interval beginning when the pins are initially immersed into the solder wave until they exit the solder wave. For multiple waves, the dwell time is from entering the first wave until exiting the last wave. During this time, pin temperatures must not exceed the maximum temperature given in the table below. Body temperature of the device must not exceed the limit shown in the table below at any time during the soldering process.

Device	Maximum Pin Temperature	Maximum Body Temperature	Maximum Dwell Time	Wave Cycles
CPC1219Y	260°C	245°C	10 seconds*	1

*Total cumulative duration of all waves.


Board Wash

IXYS Integrated Circuits recommends the use of no-clean flux formulations. Board washing to reduce or remove flux residue following the solder reflow process is acceptable provided proper precautions are taken to prevent damage to the device. These precautions include but are not limited to: using a low pressure wash and providing a follow up bake cycle sufficient to remove any moisture trapped within the device due to the washing process. Due to the variability of the wash parameters used to clean the board, determination of the bake temperature and duration necessary to remove the moisture trapped within the package is the responsibility of the user (assembler). Cleaning or drying methods that employ ultrasonic energy may damage the device and should not be used. Additionally, the device must not be exposed to halide flux or solvents.



MECHANICAL DIMENSIONS

CPC1219Y

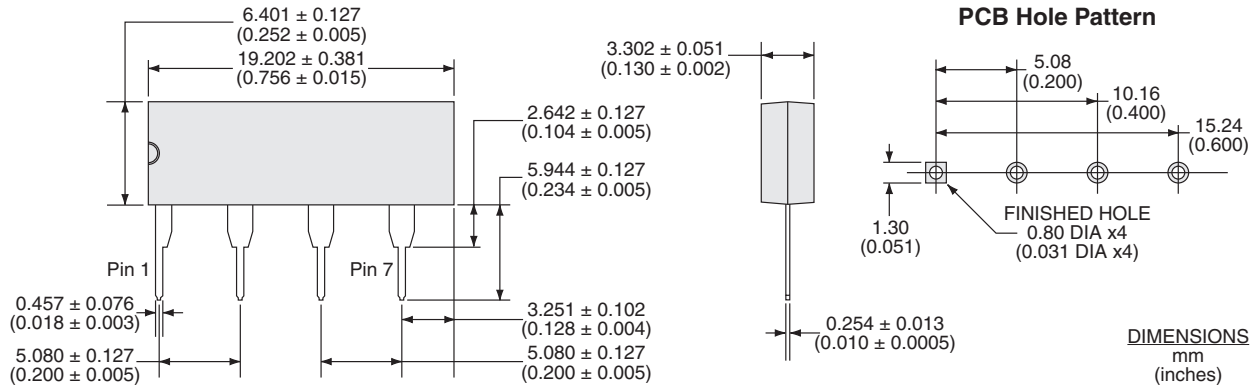

For additional information please visit our website at: <https://www.ixysic.com>



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <https://www.littelfuse.com/disclaimer-electronics>.

Specification: DS-CPC1219Y-R07
©Copyright 2021, Littelfuse, Inc.
OptoMOS® is a registered trademark of IXYS Integrated Circuits
All rights reserved. Printed in USA.
10/27/2021