


HiPerFET™ Power MOSFETs

N-Channel Enhancement Mode
High dv/dt, Low t_{rr} , HDMOS™ Family

Obsolete:
IXFM7N80


IXFH 7 N80 ~~IXFM 7 N80~~

$V_{DSS} = 800 \text{ V}$
 $I_{D(\text{cont})} = 7 \text{ A}$
 $R_{DS(\text{on})} = 1.4 \text{ } \Omega$
 $t_{rr} = 250 \text{ ns}$




| Symbol | Test Conditions | Maximum Ratings | |
|-----------|--|-----------------------------|------------------|
| V_{DSS} | $T_J = 25^\circ\text{C}$ to 150°C | 800 | V |
| V_{DGR} | $T_J = 25^\circ\text{C}$ to 150°C ; $R_{GS} = 1 \text{ M}\Omega$ | 800 | V |
| V_{GS} | Continuous | ± 20 | V |
| V_{GSM} | Transient | ± 30 | V |
| I_{D25} | $T_C = 25^\circ\text{C}$ | 7 | A |
| I_{DM} | $T_C = 25^\circ\text{C}$, pulse width limited by T_{JM} | 28 | A |
| I_{AR} | $T_C = 25^\circ\text{C}$ | 7 | A |
| E_{AR} | $T_C = 25^\circ\text{C}$ | 18 | mJ |
| dv/dt | $I_S \leq I_{DM}$, $di/dt \leq 100 \text{ A}/\mu\text{s}$, $V_{DD} \leq V_{DSS}$, $T_J \leq 150^\circ\text{C}$, $R_G = 2 \text{ } \Omega$ | 5 | V/ns |
| P_D | $T_C = 25^\circ\text{C}$ | 180 | W |
| T_J | | -55 ... +150 | $^\circ\text{C}$ |
| T_{JM} | | 150 | $^\circ\text{C}$ |
| T_{stg} | | -55 ... +150 | $^\circ\text{C}$ |
| T_L | 1.6 mm (0.062 in.) from case for 10 s | 300 | $^\circ\text{C}$ |
| M_d | Mounting torque | 1.13/10 | Nm/lb.in. |
| Weight | | TO-204 = 18 g, TO-247 = 6 g | |

TO-247 AD (IXFH)



~~TO-204 AA (IXFM)~~

**Package
unavailable**



G = Gate, D = Drain,
S = Source, TAB = Drain

Features

- International standard packages
- Low $R_{DS(\text{on})}$ HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
 - easy to drive and to protect
- Fast intrinsic Rectifier

Applications

- DC-DC converters
- Synchronous rectification
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- AC motor control
- Temperature and lighting controls
- Low voltage relays

Advantages


- Easy to mount with 1 screw (TO-247) (isolated mounting screw hole)
- Space savings
- High power density

| Symbol | Test Conditions | Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified) | | |
|---------------------|---|---|------|--|
| | | min. | typ. | max. |
| V_{DSS} | $V_{GS} = 0 \text{ V}$, $I_D = 3 \text{ mA}$ | 800 | | V |
| $V_{GS(\text{th})}$ | $V_{DS} = V_{GS}$, $I_D = 2.5 \text{ mA}$ | 2 | | 4.5 V |
| I_{GSS} | $V_{GS} = \pm 20 \text{ V}_{DC}$, $V_{DS} = 0$ | | | $\pm 100 \text{ nA}$ |
| I_{DSS} | $V_{DS} = 0.8 \cdot V_{DSS}$, $V_{GS} = 0 \text{ V}$ | | | $T_J = 25^\circ\text{C}$: 250 μA $T_J = 125^\circ\text{C}$: 1 mA |
| $R_{DS(\text{on})}$ | $V_{GS} = 10 \text{ V}$, $I_D = 0.5 \cdot I_{D25}$ Pulse test, $t \leq 300 \text{ } \mu\text{s}$, duty cycle $d \leq 2 \%$ | | | 1.4 Ω |

| Symbol | Test Conditions | Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified) | | |
|--------------|---|---|------|--------|
| | | min. | typ. | max. |
| g_{fs} | $V_{DS} = 10\text{ V}; I_D = 0.5 \cdot I_{D25}$, pulse test | 4 | 6 | S |
| C_{iss} | $V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$ | | 2800 | pF |
| C_{oss} | | | 250 | pF |
| C_{rss} | | | 100 | pF |
| $t_{d(on)}$ | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$ $R_G = 4.7\ \Omega$ (External) | | 35 | 100 ns |
| t_r | | | 40 | 110 ns |
| $t_{d(off)}$ | | | 100 | 200 ns |
| t_f | | | 60 | 100 ns |
| $Q_{g(on)}$ | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$ | | 110 | 130 nC |
| Q_{gs} | | | 15 | 30 nC |
| Q_{gd} | | | 50 | 70 nC |
| R_{thJC} | | | 0.7 | K/W |
| R_{thCK} | | 0.25 | | K/W |


| Symbol | Test Conditions | Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified) | | |
|----------|---|---|------|---------------|
| | | min. | typ. | max. |
| I_S | $V_{GS} = 0\text{ V}$ | | | 7 A |
| I_{SM} | Repetitive; pulse width limited by T_{JM} | | | 28 A |
| V_{SD} | $I_F = I_S, V_{GS} = 0\text{ V}$, Pulse test, $t \leq 300\ \mu\text{s}$, duty cycle $d \leq 2\%$ | | | 1.5 V |
| t_{rr} | $I_F = I_S$ $-di/dt = 100\text{ A}/\mu\text{s}$, $V_R = 100\text{ V}$ | $T_J = 25^\circ\text{C}$ | | 250 ns |
| | | $T_J = 125^\circ\text{C}$ | | 400 ns |
| Q_{RM} | $I_F = I_S$ $-di/dt = 100\text{ A}/\mu\text{s}$, $V_R = 100\text{ V}$ | $T_J = 25^\circ\text{C}$ | 0.5 | μC |
| | | $T_J = 125^\circ\text{C}$ | 1.0 | μC |
| I_{RM} | $I_F = I_S$ $-di/dt = 100\text{ A}/\mu\text{s}$, $V_R = 100\text{ V}$ | $T_J = 25^\circ\text{C}$ | 7.5 | A |
| | | $T_J = 125^\circ\text{C}$ | 9.0 | A |

TO-247 AD (IXFH) Outline

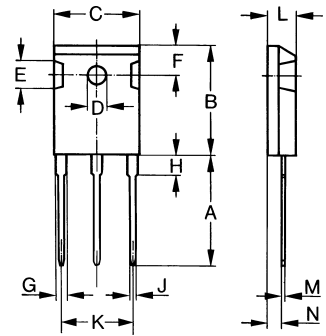

| Dim. | Millimeter | | Inches | |
|------|------------|-------|--------|-------|
| | Min. | Max. | Min. | Max. |
| A | 19.81 | 20.32 | 0.780 | 0.800 |
| B | 20.80 | 21.46 | 0.819 | 0.845 |
| C | 15.75 | 16.26 | 0.610 | 0.640 |
| D | 3.55 | 3.65 | 0.140 | 0.144 |
| E | 4.32 | 5.49 | 0.170 | 0.216 |
| F | 5.4 | 6.2 | 0.212 | 0.244 |
| G | 1.65 | 2.13 | 0.065 | 0.084 |
| H | - | 4.5 | - | 0.177 |
| J | 1.0 | 1.4 | 0.040 | 0.055 |
| K | 10.8 | 11.0 | 0.426 | 0.433 |
| L | 4.7 | 5.3 | 0.185 | 0.209 |
| M | 0.4 | 0.8 | 0.016 | 0.031 |
| N | 1.5 | 2.49 | 0.087 | 0.102 |

TO-204 AA (IXFM) Outline

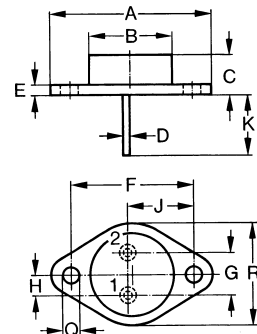

| Dim. | Millimeter | | Inches | |
|------|------------|-------|--------|-------|
| | Min. | Max. | Min. | Max. |
| A | 38.61 | 39.12 | 1.520 | 1.540 |
| B | 19.43 | 19.94 | - | 0.785 |
| C | 6.40 | 9.14 | 0.252 | 0.360 |
| D | 0.97 | 1.09 | 0.038 | 0.043 |
| E | 1.53 | 2.92 | 0.060 | 0.115 |
| F | 30.15 | BSC | 1.187 | BSC |
| G | 10.67 | 11.17 | 0.420 | 0.440 |
| H | 5.21 | 5.71 | 0.205 | 0.225 |
| J | 16.64 | 17.14 | 0.655 | 0.675 |
| K | 11.18 | 12.19 | 0.440 | 0.480 |
| Q | 3.84 | 4.19 | 0.151 | 0.165 |
| R | 25.16 | 25.90 | 0.991 | 1.020 |

Fig. 1 Output Characteristics

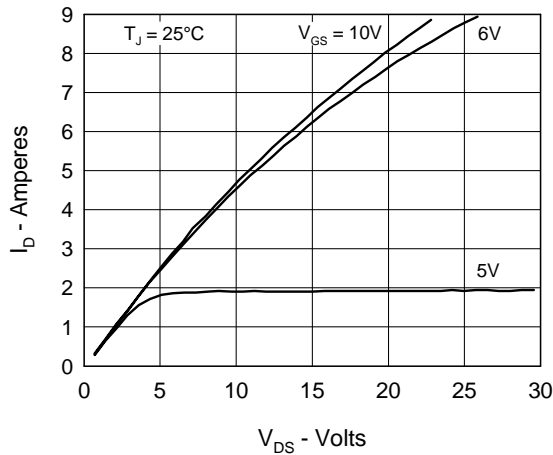


Fig. 2 Input Admittance

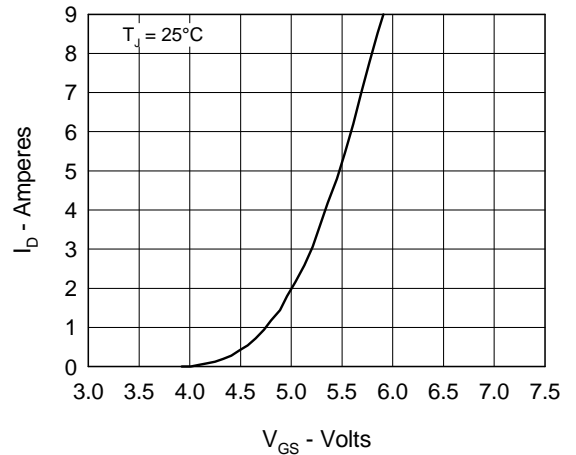


Fig. 3 $R_{DS(on)}$ vs. Drain Current

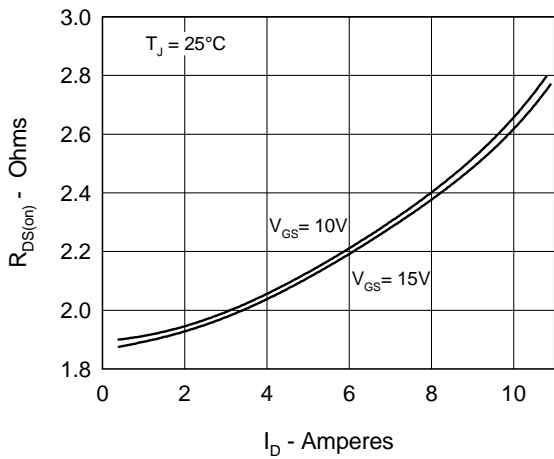


Fig. 4 Temperature Dependence of Drain to Source Resistance

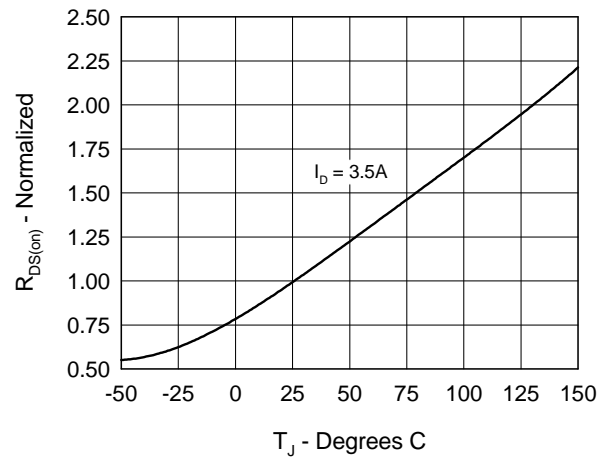


Fig. 5 Drain Current vs. Case Temperature

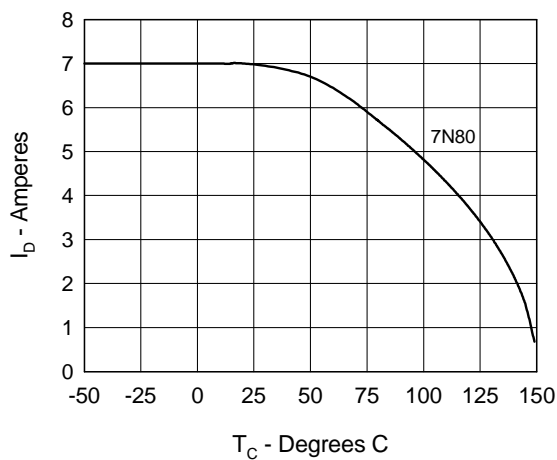


Fig. 6 Temperature Dependence of Breakdown and Threshold Voltage

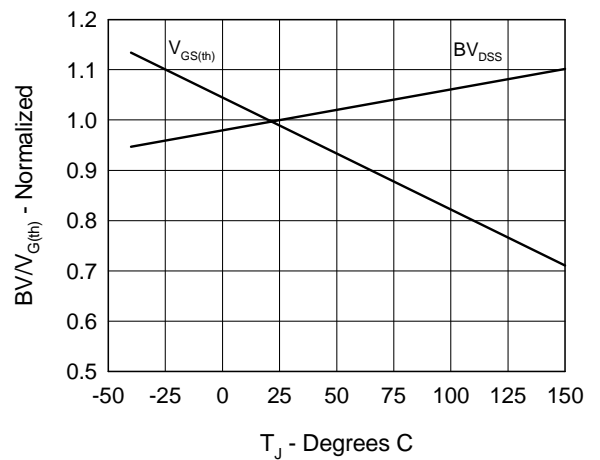


Fig.7 Gate Charge Characteristic Curve

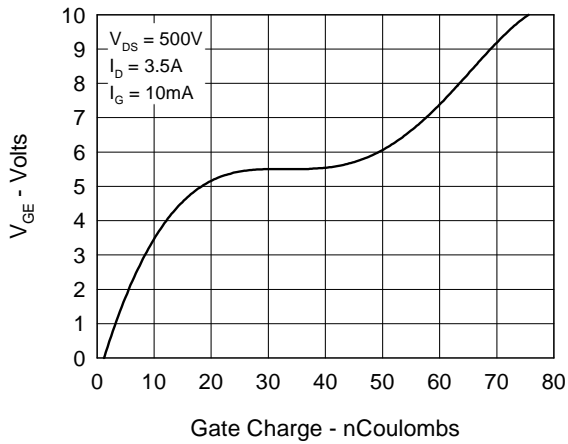


Fig.8 Forward Bias Safe Operating Area

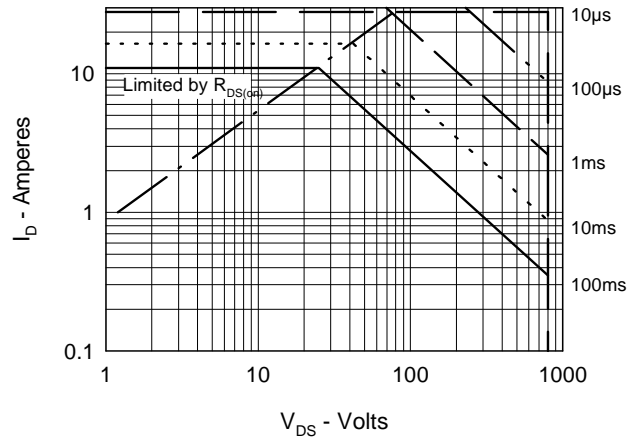


Fig.9 Capacitance Curves

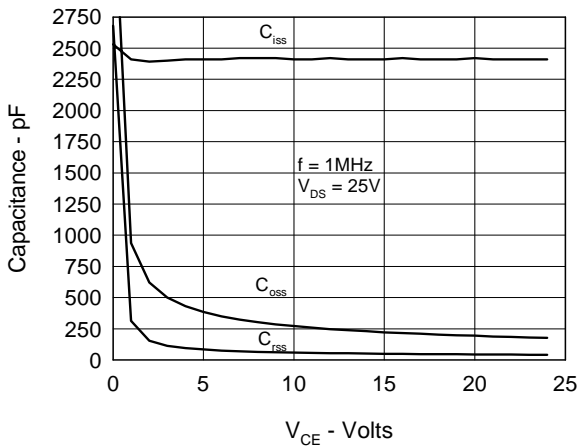


Fig.10 Source Current vs. Source to Drain Voltage


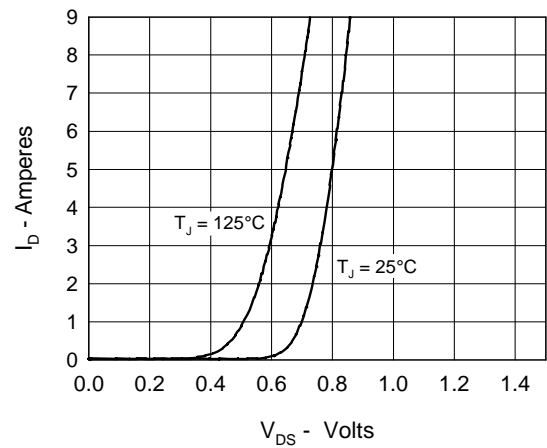


Fig.11 Transient Thermal Impedance



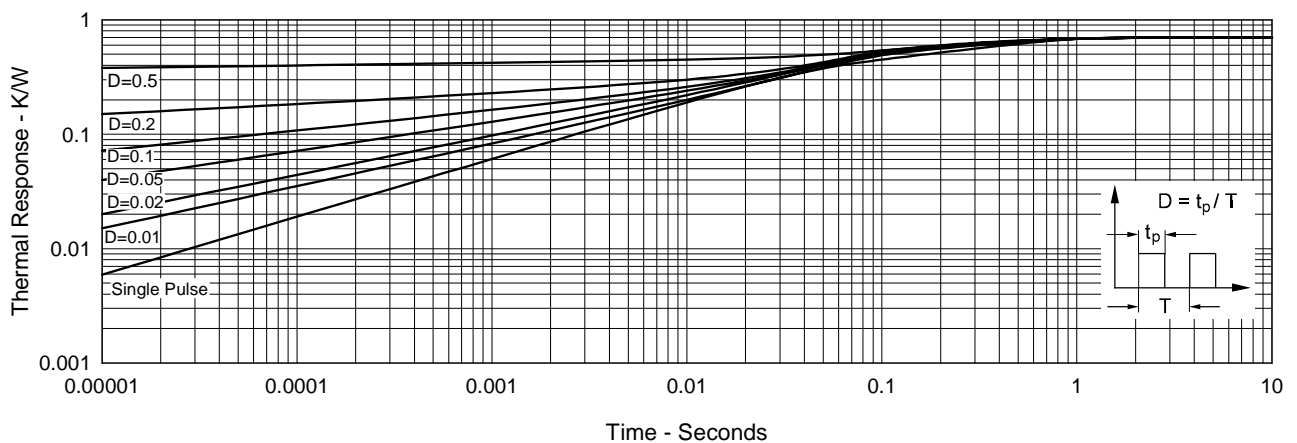

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.