


# Standard Rectifier Module

$V_{RRM} = 2 \times 1600 \text{ V}$   
 $I_{FAV} = 425 \text{ A}$   
 $V_F = 1.21 \text{ V}$

Phase leg + NTC


Part number

**MDMA425P1600PTSF**

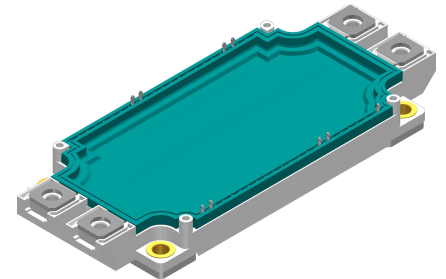

Backside: isolated

 E72873

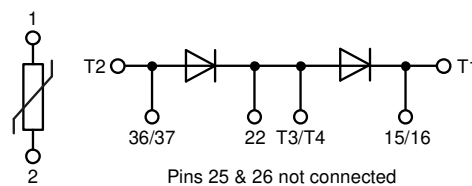

### Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

### Applications:

- Diode for main rectification
- For single and three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

### Package: SimBus F

- Isolation Voltage: 4300 V~
- Industry standard outline
- RoHS compliant
- PressFit-Pins for PCB mounting
- Height: 17 mm
- Base plate: Copper internally DCB isolated
- Advanced power cycling
- Phase Change Material available


### Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).



Rectifier				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
$V_{RSM}$	max. non-repetitive reverse blocking voltage					1700	V
$V_{RRM}$	max. repetitive reverse blocking voltage					1600	V
$I_R$	reverse current	$V_R = 1600$ V		$T_{VJ} = 25^\circ\text{C}$		300	$\mu\text{A}$
		$V_R = 1600$ V		$T_{VJ} = 150^\circ\text{C}$		8	mA
$V_F$	forward voltage drop	$I_F = 425$ A		$T_{VJ} = 25^\circ\text{C}$		1.29	V
		$I_F = 850$ A				1.65	V
		$I_F = 425$ A		$T_{VJ} = 125^\circ\text{C}$		1.21	V
		$I_F = 850$ A				1.64	V
$I_{FAV}$	average forward current	$T_C = 100^\circ\text{C}$		$T_{VJ} = 150^\circ\text{C}$		425	A
		rectangular	d = 0.5				
$V_{FO}$	threshold voltage			$T_{VJ} = 150^\circ\text{C}$		0.77	V
$r_F$	slope resistance					1.01	m $\Omega$
		} for power loss calculation only					
$R_{thJC}$	thermal resistance junction to case					0.07	K/W
$R_{thCH}$	thermal resistance case to heatsink				0.04		K/W
$P_{tot}$	total power dissipation			$T_C = 25^\circ\text{C}$		1785	W
$I_{FSM}$	max. forward surge current	t = 10 ms; (50 Hz), sine		$T_{VJ} = 45^\circ\text{C}$		10.0	kA
		t = 8,3 ms; (60 Hz), sine		$V_R = 0$ V		10.8	kA
		t = 10 ms; (50 Hz), sine		$T_{VJ} = 150^\circ\text{C}$		8.50	kA
		t = 8,3 ms; (60 Hz), sine		$V_R = 0$ V		9.18	kA
$I^2t$	value for fusing	t = 10 ms; (50 Hz), sine		$T_{VJ} = 45^\circ\text{C}$		500.0	kA <sup>2</sup> s
		t = 8,3 ms; (60 Hz), sine		$V_R = 0$ V		485.2	kA <sup>2</sup> s
		t = 10 ms; (50 Hz), sine		$T_{VJ} = 150^\circ\text{C}$		361.3	kA <sup>2</sup> s
		t = 8,3 ms; (60 Hz), sine		$V_R = 0$ V		350.6	kA <sup>2</sup> s
$C_J$	junction capacitance	$V_R = 400$ V; f = 1 MHz		$T_{VJ} = 25^\circ\text{C}$		661	pF

Package SimBus F		Ratings				
Symbol	Definition	Conditions	min.	typ.	max.	Unit
$I_{RMS}$	RMS current	per terminal			tbd	A
$T_{VJ}$	virtual junction temperature		-40		175	°C
$T_{op}$	operation temperature		-40		150	°C
$T_{stg}$	storage temperature		-40		125	°C
<b>Weight</b>				350		g
$M_D$	mounting torque		3		6	Nm
$M_T$	terminal torque		3		6	Nm
$d_{Spp/App}$	creepage distance on surface   striking distance through air	terminal to terminal	13.3	10.0		mm
$d_{Spb/Apb}$		terminal to backside	10.2	10.2		mm
$V_{ISOL}$	isolation voltage	t = 1 second	4300			V
		t = 1 minute	3600			V

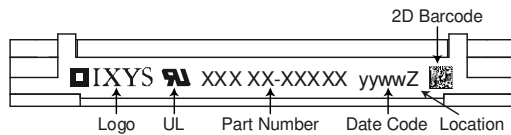
**Part description**

- M = Module
- D = Diode
- M = Standard Rectifier
- A = (up to 1800V)
- 425 = Current Rating [A]
- P = Phase leg
- 1600 = Reverse Voltage [V]
- PT = PressFit-Pin, Thermistor
- SF = SimBus F
- = Hyphen
- PC = Phase Change Material

Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MDMA425P1600PTSF	MDMA425P1600PTSF	Blister	24	519078
Alternative	MDMA425P1600PTSF-PC	MDMA425P1600PTSF	Blister	24	519057


Similar Part	Package	Voltage class
MDMA300P1600PTSF	SimBus F	1600
MDMA600P1600PTSF	SimBus F	1600
MDNA300P2200PTSF	SimBus F	2200
MDNA600P2200PTSF	SimBus F	2200

**Temperature Sensor NTC**


Symbol	Definition	Conditions	min.	typ.	max.	Unit
$R_{25}$	resistance	$T_{VJ} = 25^\circ$	4.85	5	5.15	k $\Omega$
$B_{25/50}$	temperature coefficient			3375		K

**Equivalent Circuits for Simulation**

\* on die level

 $T_{VJ} = 150^\circ\text{C}$ 


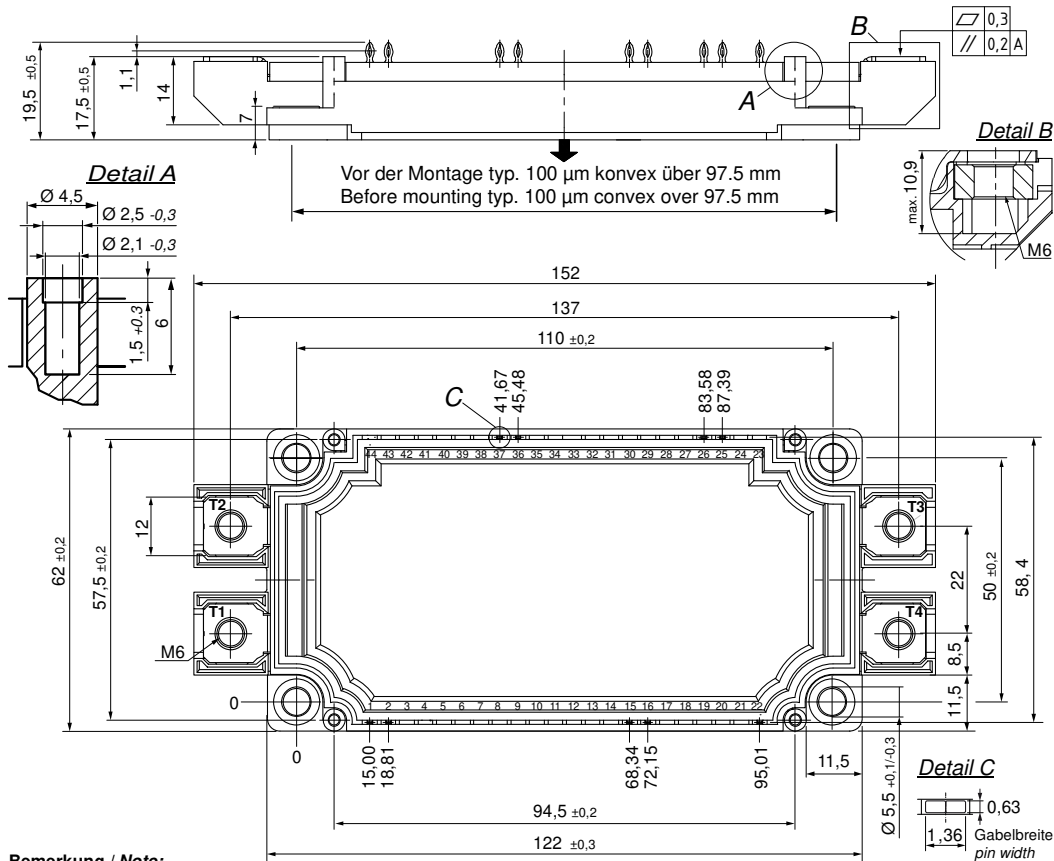
$V_{0 \max}$	threshold voltage	0.77				V
$R_{0 \max}$	slope resistance *	0.29				m $\Omega$

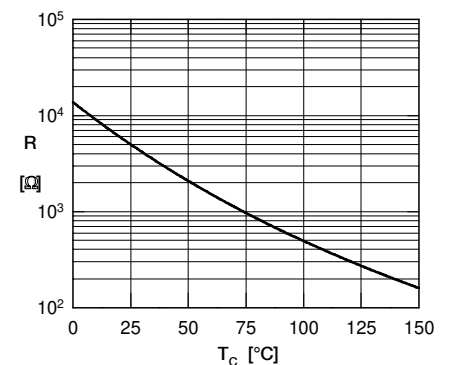

Typ. NTC resistance vs. temperature



**Outlines SimBus F**




**Bemerkung / Note:**

- Nichttolerierete Maße nach / Measure w/o tolerances acc. DIN ISO 2768-T1-m
- PCB-Lochmuster / PCB hole pattern: see pin position
- Toleranz Pin-Position und PCB-Lochmuster / Tolerance of pin position and PCB hole pattern:  $\oplus 0.1$
- Bohrlochdurchmesser / Diameter of drill:  $\varnothing 1.16$  mm
- Endlochdurchmesser / Diameter of plated holes:  $\varnothing 1.00 - 1.10$  mm (Cu thickness in via typ. 50  $\mu\text{m}$ )
- Beschichtung / Plating: chem. Sn max. 15  $\mu\text{m}$
- Einpresskraft / Insert Force: per terminal with a typ. insert speed of 1 mm/s: typ. 90 N
- Weitere Angaben / Further information: [www.ixys.com](http://www.ixys.com) Application note IXAN0077
- Montageanleitung / Mounting instruction: [www.ixys.com](http://www.ixys.com) Application note IXAN0024

**Detail A: PCB-Montage / Mounting on PCB<sup>L</sup>**

- Empfohlene, selbstschneidende Schraube / Recommended, self-tapping screw: **EJOT PT®** (Größe / size: **K25**)<sup>L</sup>
- Max. Schraubenlänge / Max. screw length: **PCB-Dicke / thickness + 6 mm** (max. Lochtiefe / hole depth)<sup>L</sup>
- Empfohlenes Drehmoment / Recommended mounting torque: **1.5 Nm**

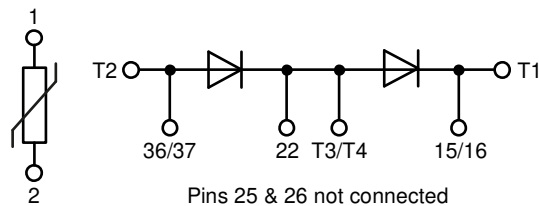

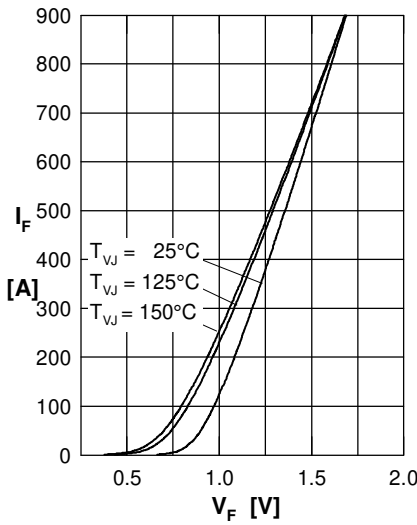
**Rectifier**


Fig. 1 Forward current versus voltage drop per diode

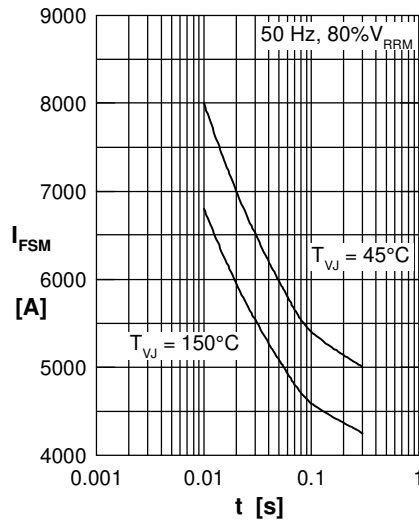


Fig. 2 Surge overload current vs. time per diode

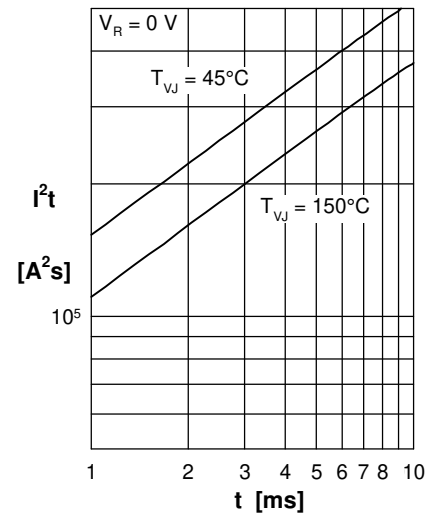
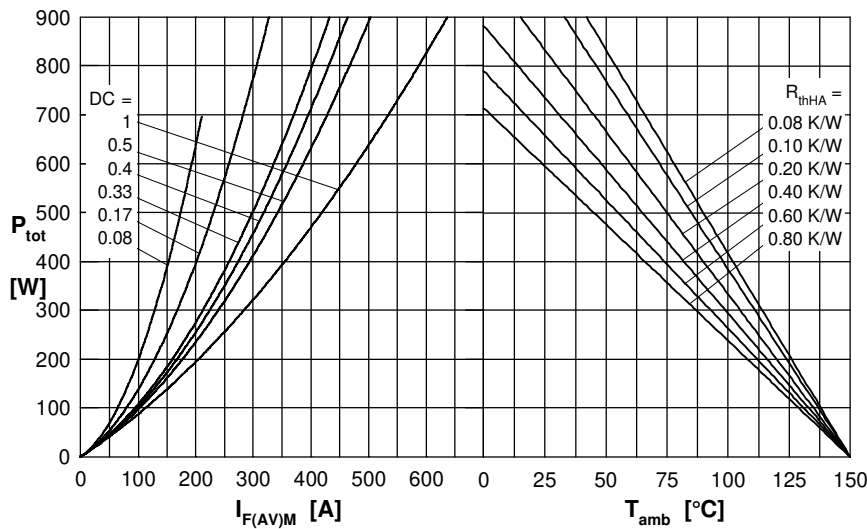

 Fig. 3  $I^2t$  versus time per diode


Fig. 4 Power dissipation vs. forward current and ambient temperature per diode

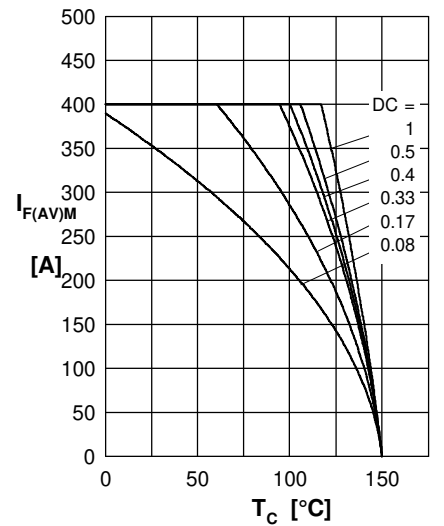


Fig. 5 Max. forward current vs. case temperature per diode

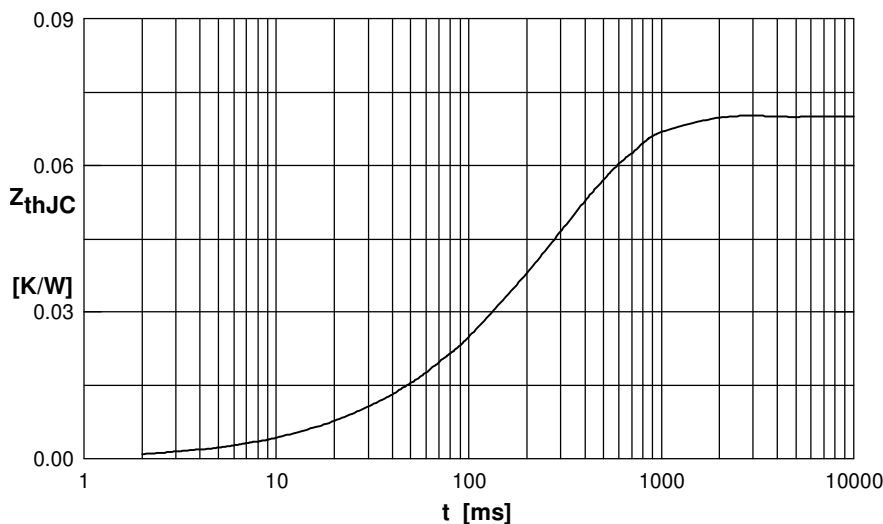


Fig. 6 Transient thermal impedance junction to case vs. time per diode

 Constants for  $Z_{thJC}$  calculation:

i	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.003	0.0150
2	0.009	0.0800
3	0.016	0.2200
4	0.042	0.3800