


Pxxx0S1xL Series

SIDACtor® -DO-214AC

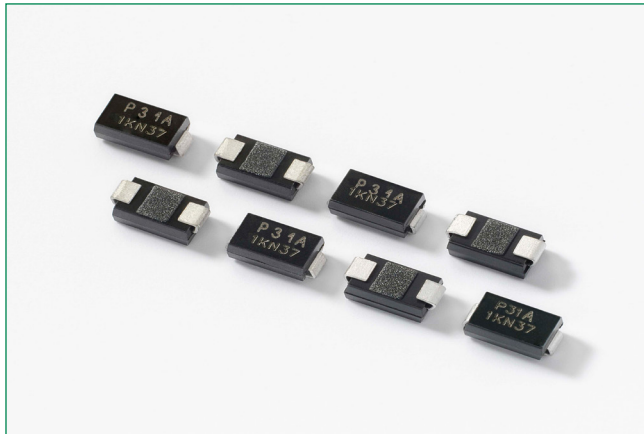

Description

SIDACtor® SMA Thyristors Series are designed to protect baseband equipment such as phones, faxes, modems, line cards, CPE and DSL from damaging overvoltage transients.

The series provides a surface mount solution that enables equipment to comply with global regulatory standards.

Features & Benefits

- Low voltage overshoot
- Low on-state voltage
- Does not degrade surge capability after multiple surge events within limit.
- RoHS Compliant and Halogen-Free
- Fails short circuit when surged in excess of ratings
- Low capacitance
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)

Additional Information



Resources



Accessories



Samples

Applicable Global Standards

- TIA-968-A*
- TIA-968-B*
- ITU K.20/21/45 Enhanced Level*
- ITU K.20/21/45 Basic Level
- GR 1089 Inter-building*
- GR 1089 Intra-building
- IEC 61000-4-5 2nd edition
- YD/T 1082
- YD/T 993
- YD/T 950

* Line impedance required to pass operationally

Agency Approvals

| Agency | Agency File Number |
|--------|--------------------|
| | E133083 |

Schematic Symbol



Electrical Characteristics

| Part Number | Marking | V_{DRM} @ $I_{DRM}=5\mu A$ | V_s @ $100V/\mu s$ | I_H | I_s | I_T | V_{T1} @ $I_T=2.2$ Amps | Capacitance @ 1MHz, 2V bias | |
|-------------|---------|---------------------------------|-------------------------|--------|--------|-------|------------------------------|--------------------------------|--------|
| | | V min | V max | mA min | mA max | A max | V max | pF min | pF max |
| P0080S1ALRP | P-8A | 6 | 25 | 50 | 800 | 2.2 | 4 | 25 | 35 |
| P0220S1ALRP | P22A | 15 | 32 | 50 | 800 | 2.2 | 4 | 10 | 30 |
| P0300S1ALRP | P03A | 25 | 40 | 50 | 800 | 2.2 | 4 | 10 | 30 |
| P0640S1ALRP | P06A | 58 | 77 | 150 | 800 | 2.2 | 4 | 10 | 30 |
| P1800S1ALRP | P18A | 170 | 220 | 150 | 800 | 2.2 | 4 | 10 | 30 |
| P2300S1ALRP | P23A | 190 | 260 | 150 | 800 | 2.2 | 4 | 10 | 30 |
| P2600S1ALRP | P26A | 220 | 300 | 150 | 800 | 2.2 | 4 | 10 | 30 |
| P3100S1ALRP | P31A | 275 | 350 | 150 | 800 | 2.2 | 4 | 10 | 30 |
| P3500S1ALRP | P35A | 320 | 400 | 150 | 800 | 2.2 | 4 | 10 | 30 |
| P0080S1BLRP | P-8B | 6 | 25 | 50 | 800 | 2.2 | 4 | 20 | 35 |
| P0220S1BLRP | P22B | 15 | 32 | 50 | 800 | 2.2 | 4 | 10 | 30 |
| P0300S1BLRP | P03B | 25 | 40 | 50 | 800 | 2.2 | 4 | 10 | 30 |
| P0640S1BLRP | P06B | 58 | 77 | 120 | 800 | 2.2 | 4 | 10 | 30 |
| P1800S1BLRP | P18B | 170 | 220 | 120 | 800 | 2.2 | 4 | 10 | 30 |
| P2300S1BLRP | P23B | 190 | 260 | 120 | 800 | 2.2 | 4 | 10 | 30 |
| P2600S1BLRP | P26B | 220 | 300 | 120 | 800 | 2.2 | 4 | 10 | 30 |
| P3100S1BLRP | P31B | 275 | 350 | 120 | 800 | 2.2 | 4 | 10 | 30 |
| P3500S1BLRP | P35B | 320 | 400 | 120 | 800 | 2.2 | 4 | 10 | 30 |

Notes:

- Absolute maximum ratings measured at $T_a = 25^\circ C$ (unless otherwise noted).
- Components are bi-directional (unless otherwise noted).

Pxxx0S1xL Series

SIDACtor® -DO-214AC

Surge Ratings


| Series | I_{PP} | | | | | | | | | I_{TSM} 50/60 Hz | di/dt |
|--------|--|--|--|--|--|--|--|--|---|-----------------------|-------|
| | 0.2/310 ¹ 0.5/700 ² | 2/10 ¹ 2/10 ² | 8/20 ¹ 1.2/50 ² | 10/160 ¹ 10/160 ² | 10/560 ¹ 10/560 ² | 5/320 ¹ 9/720 ² | 10/360 ¹ 10/360 ² | 10/1000 ¹ 10/1000 ² | 5/310 ¹ 10/700 ² | | |
| | A min | A min | A min | A min | A min | A min | A min | A min | A min | | |
| A | 20 | 150 | 150 | 90 | 50 | 75 | 75 | 50 | 75 | 20 | 500 |
| B | - | 250 | 250 | 90 | 60 | 75 | 75 | 55 | 75 | 25 | 500 |

Notes:


1 Current waveform in μs
2 Voltage waveform in μs

- Peak pulse current rating (I_{pp}) is repetitive and guaranteed for the life of the product that remains in thermal equilibrium.
- I_{pp} ratings applicable over temperature range of $-40^{\circ}C$ to $+85^{\circ}C$
- The component must initially be in thermal equilibrium with $-40^{\circ}C \leq T_j \leq +150^{\circ}C$


Thermal Considerations

| Package | Symbol | Parameter | Value | Unit |
|---|-----------------|---|-------------|---------------|
|  DO-214AC | T_j | Operating Junction Temperature Range | -40 to +150 | $^{\circ}C$ |
| | T_s | Storage Temperature Range | -65 to +150 | $^{\circ}C$ |
| | $R_{\theta JA}$ | Thermal Resistance: Junction to Ambient | 90 | $^{\circ}C/W$ |


V-I Characteristics

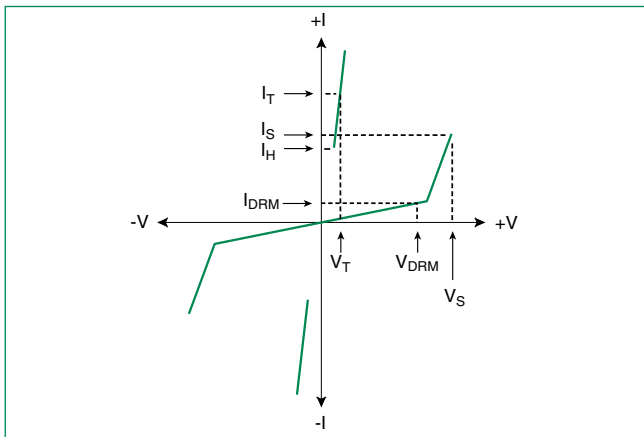


tr x td Pulse Waveform

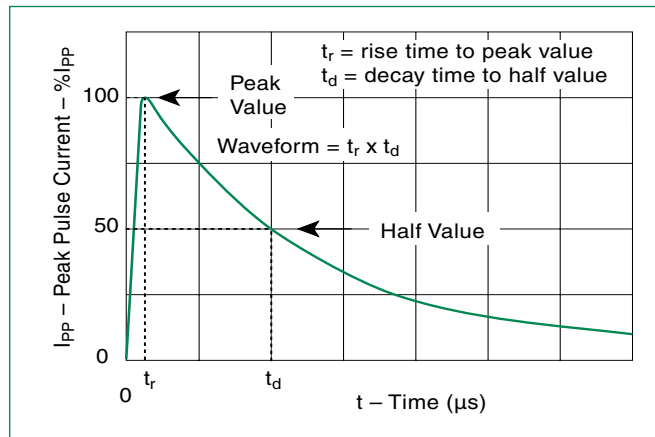

Normalized VS Change vs. Junction Temperature

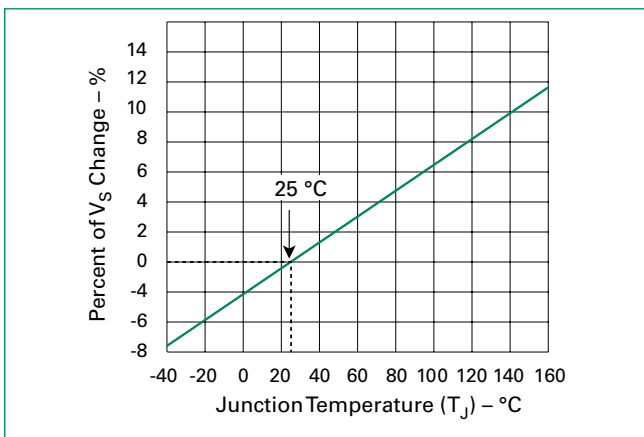

Normalized DC Holding Current vs. Case Temperature

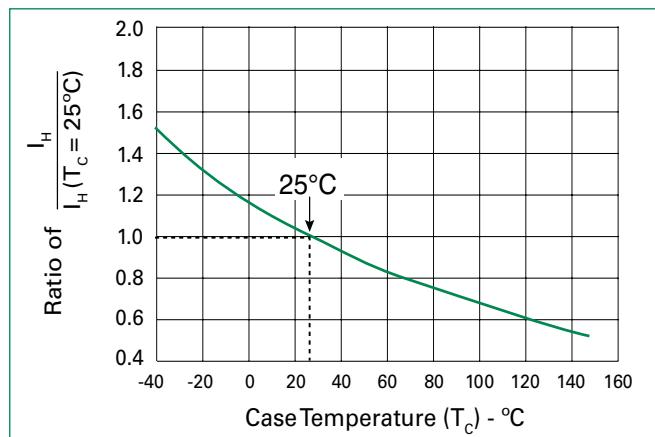


Pxxx0S1xL Series

SIDACtor® -DO-214AC

Soldering Parameters

| | | |
|--|------------------------------------|-------------------------------|
| Reflow Condition | | Pb-Free assembly (see Fig. 1) |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | +150°C |
| | - Temperature Max ($T_{s(max)}$) | +200°C |
| | - Time (Min to Max) (t_s) | 60-180 secs. |
| Average ramp up rate (Liquidus Temp (T_L) to peak) | | 3°C/sec. Max. |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/sec. Max. |
| Reflow | - Temperature (T_L) (Liquidus) | +217°C |
| | - Temperature (t_l) | 60-150 secs. |
| Peak Temp (T_p) | | +260(+0/-5)°C |
| Time within 5°C of actual Peak Temp (t_p) | | 30 secs. Max. |
| Ramp-down Rate | | 6°C/sec. Max. |
| Time 25°C to Peak Temp (T_p) | | 8 min. Max. |
| Do not exceed | | +260°C |

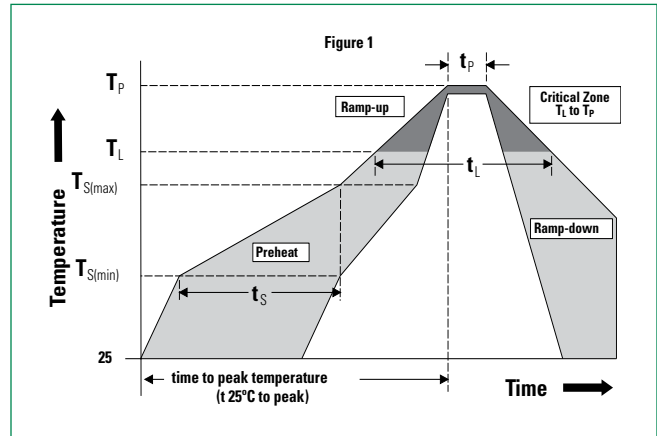

Physical Specifications

| | |
|------------------------|---|
| Lead Material | Copper Alloy |
| Terminal Finish | 100% Matte-Tin Plated |
| Body Material | UL Recognized epoxy meeting flammability classification V-0 |


Environmental Specifications

| | |
|---|---|
| High Temp Voltage Blocking | 80% Rated V_{DRM} (V_{AC} Peak) +125°C or +150°C, 504 or 1008 hrs. MIL-STD-750 (Method 1040) JEDEC, JESD22-A-101 |
| Temp Cycling | -65°C to +150°C, 15 min. dwell, 10 up to 100 cycles. MIL-STD-750 (Method 1051) EIA/JEDEC, JESD22-A104 |
| Biased Temp & Humidity | 52 V_{DC} (+85°C) 85% RH, 504 up to 1008 hrs. EIA/JEDEC, JESD22-A-101 |
| High Temp Storage | +150°C 1008 hrs. MIL-STD-750 (Method 1031) JEDEC, JESD22-A-101 |
| Low Temp Storage | -65°C, 1008 hrs. |
| Thermal Shock | 0°C to +100°C, 5 min. dwell, 10 sec. transfer, 10 cycles. MIL-STD-750 (Method 1056) JEDEC, JESD22-A-106 |
| Autoclave (Pressure Cooker Test) | +121°C, 100%RH, 2atm, 24 up to 168 hrs. EIA/JEDEC, JESD22-A-102 |
| Resistance to Solder Heat | +260°C, 30 secs. MIL-STD-750 (Method 2031) |
| Moisture Sensitivity Level | 85%RH, +85°C, 168 hrs., 3 reflow cycles (+260°C Peak). JEDEC-J-STD-020, Level 1 |


Pxxx0S1xL Series

SIDACtor® -DO-214AC

Part Numbering

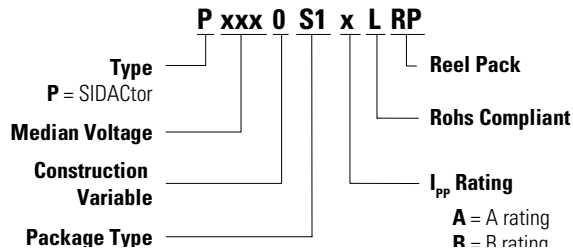


Part Marking

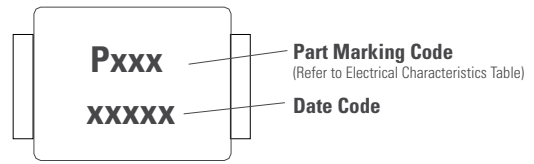

Dimensions

DO-214AC (SMA)

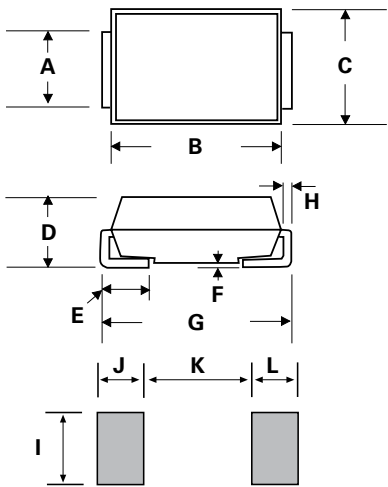


| Dimensions | Inches | | Millimeters | |
|------------|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 0.049 | 0.065 | 1.250 | 1.650 |
| B | 0.157 | 0.177 | 3.990 | 4.500 |
| C | 0.100 | 0.110 | 2.540 | 2.790 |
| D | 0.078 | 0.090 | 1.980 | 2.290 |
| E | 0.030 | 0.060 | 0.780 | 1.520 |
| F | - | 0.008 | - | 0.203 |
| G | 0.194 | 0.208 | 4.930 | 5.280 |
| H | 0.006 | 0.012 | 0.152 | 0.305 |
| I | 0.070 | - | 1.800 | - |
| J | 0.082 | - | 2.100 | - |
| K | - | 0.090 | - | 2.300 |
| L | 0.082 | - | 2.100 | - |

Packing Options

| Package Type | Description | Packing Options Quantity | Added Suffix | Industry Standard |
|--------------|---|--------------------------|--------------|-------------------|
| S1 | DO-214AC Tape & Reel Pack 12mm/13" tape | 5000 | RP | EIA-481 |

Tape and Reel Specification – DO-214AC

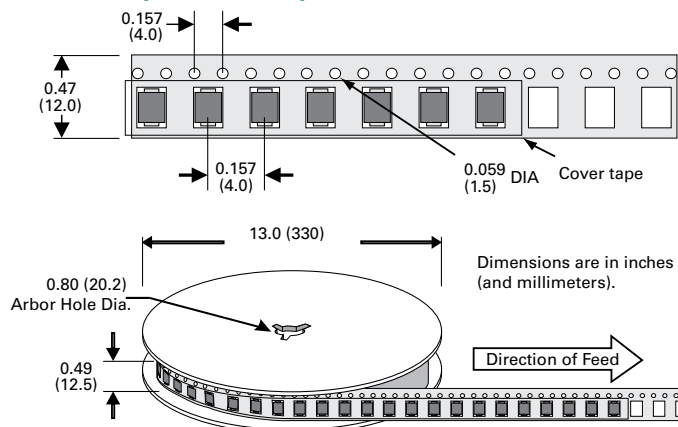

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.