

SMDJ-HR Series

Surface Mount – 3000W



Additional Information



Resources



Accessories



Samples

Agency Approvals

| Agency | Agency File Number |
|--------|--------------------|
| | E230531 |

Maximum Ratings and Thermal Characteristics

($T_A = 25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|---|-----------------|------------|---------------------------|
| Peak Pulse Power Dissipation by 10/1000 μs waveform (Note 1), (Note 2) | P_{PPM} | 3000 | W |
| Power Dissipation on infinite heat sink at $T_L = 50^\circ\text{C}$ | P_D | 6.5 | W |
| Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3) | I_{FSM} | 300 | A |
| Maximum Instantaneous Forward Voltage at 100A for Unidirectional only | V_F | 3.5 | V |
| Operating Junction and Storage Temperature Range | T_J, T_{STG} | -65 to 150 | $^\circ\text{C}$ |
| Typical Thermal Resistance Junction to Lead | $R_{\theta JL}$ | 15 | $^\circ\text{C}/\text{W}$ |
| Typical Thermal Resistance Junction to Ambient | $R_{\theta JA}$ | 75 | $^\circ\text{C}/\text{W}$ |

Notes:

1. Non-repetitive current pulse per Fig. 2 and derated above $T_A = 25^\circ\text{C}$ per Fig. 3.
2. Mounted on copper pad area of 0.31x0.31" (8.0 x 8.0mm) to each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional component only, duty cycle=4 per minute maximum.

Description

The SMDJ-HR High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.


Features

- High Reliability application and automotive grade AEC-Q101 qualified
- 3000W peak pulse power capability at 10/1000 μs waveform, repetition rate (duty cycles):0.01%
- For surface mounted applications in order to optimize board space
- Low profile package
- Built-in strain relief
- $V_{BR} @ T_J = V_{BR} @ 25^\circ\text{C} \times (1 + \alpha T \times (T_J - 25))$ (αT : Temperature Coefficient, typical value is 0.1%)
- Glass passivated chip junction
- Fast response time: typically less than 1.0ps from 0V to VBR min
- Excellent clamping capability
- Low incremental surge resistance
- Typical $I_R \leq 2\mu\text{A}$ for $V_R > 10\text{V}$
- Meet MSL level1, per J-STD-020, LF maximum peak of 260 $^\circ\text{C}$
- UL Recognized compound meeting flammability rating V-0.
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- Pb-free E3 means 2nd level interconnect is Pb-free and the terminal finish material is tin(Sn) (IPC/JEDEC J-STD-609A.01)

Applications

TVS components are ideal for the protection of I/O Interfaces, VCC bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.


Functional Diagram

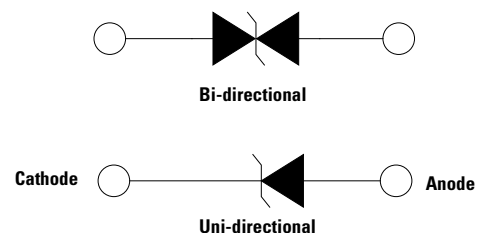

SMDJ-HR Series

Surface Mount – 3000W

Electrical Characteristics

| Part Number (Uni) | Part Number (Bi) | Marking | | Reverse Stand off Voltage V_R (Volts) | Breakdown Voltage V_{BR} (Volts) @ I_T | | Test Current I_T (mA) | Maximum Clamping Voltage V_C @ I_{PP} (V) | Maximum Peak Pulse Current I_{PP} (A) | Maximum Reverse Leakage I_R @ V_R (μ A) | Agency Approval  |
|-------------------|------------------|---------|-----|---|--|--------|-------------------------|---|---|--|---|
| | | Uni | Bi | | Min | Max | | | | | |
| SMDJ5.0A-HR | SMDJ5.0CA-HR | RDE | DDE | 5.0 | 6.40 | 7.00 | 10 | 9.2 | 326.1 | 800 | X |
| SMDJ6.0A-HR | SMDJ6.0CA-HR | RDG | DDG | 6.0 | 6.67 | 7.37 | 10 | 10.3 | 291.3 | 800 | X |
| SMDJ6.5A-HR | SMDJ6.5CA-HR | RDK | DDK | 6.5 | 7.22 | 7.98 | 10 | 11.2 | 267.9 | 500 | X |
| SMDJ7.0A-HR | SMDJ7.0CA-HR | PDM | DDM | 7.0 | 7.78 | 8.60 | 10 | 12.0 | 250.0 | 200 | X |
| SMDJ7.5A-HR | SMDJ7.5CA-HR | PDP | DDP | 7.5 | 8.33 | 9.21 | 1 | 12.9 | 232.6 | 100 | X |
| SMDJ8.0A-HR | SMDJ8.0CA-HR | PDR | DDR | 8.0 | 8.89 | 9.83 | 1 | 13.6 | 220.6 | 50 | X |
| SMDJ8.5A-HR | SMDJ8.5CA-HR | PDT | DDT | 8.5 | 9.44 | 10.40 | 1 | 14.4 | 208.3 | 20 | X |
| SMDJ9.0A-HR | SMDJ9.0CA-HR | PDV | DDV | 9.0 | 10.00 | 11.10 | 1 | 15.4 | 194.8 | 10 | X |
| SMDJ10A-HR | SMDJ10CA-HR | PDX | DDX | 10.0 | 11.10 | 12.30 | 1 | 17.0 | 176.5 | 5 | X |
| SMDJ11A-HR | SMDJ11CA-HR | PDZ | DDZ | 11.0 | 12.20 | 13.50 | 1 | 18.2 | 164.8 | 2 | X |
| SMDJ12A-HR | SMDJ12CA-HR | PEE | DEE | 12.0 | 13.30 | 14.70 | 1 | 19.9 | 150.8 | 2 | X |
| SMDJ13A-HR | SMDJ13CA-HR | PEG | DEG | 13.0 | 14.40 | 15.90 | 1 | 21.5 | 139.5 | 2 | X |
| SMDJ14A-HR | SMDJ14CA-HR | PEK | DEK | 14.0 | 15.60 | 17.20 | 1 | 23.2 | 129.3 | 2 | X |
| SMDJ15A-HR | SMDJ15CA-HR | PEM | DEM | 15.0 | 16.70 | 18.50 | 1 | 24.4 | 123.0 | 2 | X |
| SMDJ16A-HR | SMDJ16CA-HR | PEP | DEP | 16.0 | 17.80 | 19.70 | 1 | 26.0 | 115.4 | 2 | X |
| SMDJ17A-HR | SMDJ17CA-HR | PER | DER | 17.0 | 18.90 | 20.90 | 1 | 27.6 | 108.7 | 2 | X |
| SMDJ18A-HR | SMDJ18CA-HR | PET | DET | 18.0 | 20.00 | 22.10 | 1 | 29.2 | 102.7 | 2 | X |
| SMDJ20A-HR | SMDJ20CA-HR | PEV | DEV | 20.0 | 22.20 | 24.50 | 1 | 32.4 | 92.6 | 2 | X |
| SMDJ22A-HR | SMDJ22CA-HR | PEX | DEX | 22.0 | 24.40 | 26.90 | 1 | 35.5 | 84.5 | 2 | X |
| SMDJ24A-HR | SMDJ24CA-HR | PEZ | DEZ | 24.0 | 26.70 | 29.50 | 1 | 38.9 | 77.1 | 2 | X |
| SMDJ26A-HR | SMDJ26CA-HR | PFE | DFE | 26.0 | 28.90 | 31.90 | 1 | 42.1 | 71.3 | 2 | X |
| SMDJ28A-HR | SMDJ28CA-HR | PFG | DFG | 28.0 | 31.10 | 34.40 | 1 | 45.4 | 66.1 | 2 | X |
| SMDJ30A-HR | SMDJ30CA-HR | PFK | DFK | 30.0 | 33.30 | 36.80 | 1 | 48.4 | 62.0 | 2 | X |
| SMDJ33A-HR | SMDJ33CA-HR | PFM | DFM | 33.0 | 36.70 | 40.60 | 1 | 53.3 | 56.3 | 2 | X |
| SMDJ36A-HR | SMDJ36CA-HR | PFP | DFP | 36.0 | 40.00 | 44.20 | 1 | 58.1 | 51.6 | 2 | X |
| SMDJ40A-HR | SMDJ40CA-HR | PFR | DFR | 40.0 | 44.40 | 49.10 | 1 | 64.5 | 46.5 | 2 | X |
| SMDJ43A-HR | SMDJ43CA-HR | PFT | DFT | 43.0 | 47.80 | 52.80 | 1 | 69.4 | 43.2 | 2 | X |
| SMDJ45A-HR | SMDJ45CA-HR | PFV | DFV | 45.0 | 50.00 | 55.30 | 1 | 72.7 | 41.3 | 2 | X |
| SMDJ48A-HR | SMDJ48CA-HR | PFX | DFX | 48.0 | 53.30 | 58.90 | 1 | 77.4 | 38.8 | 2 | X |
| SMDJ51A-HR | SMDJ51CA-HR | PFZ | DFZ | 51.0 | 56.70 | 62.70 | 1 | 82.4 | 36.4 | 2 | X |
| SMDJ54A-HR | SMDJ54CA-HR | RGE | DGE | 54.0 | 60.00 | 66.30 | 1 | 87.1 | 34.4 | 2 | X |
| SMDJ58A-HR | SMDJ58CA-HR | PGG | DGG | 58.0 | 64.40 | 71.20 | 1 | 93.6 | 32.1 | 2 | X |
| SMDJ60A-HR | SMDJ60CA-HR | PGK | DGK | 60.0 | 66.70 | 73.70 | 1 | 96.8 | 31.0 | 2 | X |
| SMDJ64A-HR | SMDJ64CA-HR | PGM | DGM | 64.0 | 71.10 | 78.60 | 1 | 103.0 | 29.1 | 2 | X |
| SMDJ70A-HR | SMDJ70CA-HR | PGP | DGP | 70.0 | 77.80 | 86.00 | 1 | 113.0 | 26.5 | 2 | X |
| SMDJ75A-HR | SMDJ75CA-HR | PGR | DGR | 75.0 | 83.30 | 92.10 | 1 | 121.0 | 24.8 | 2 | X |
| SMDJ78A-HR | SMDJ78CA-HR | PGT | DGT | 78.0 | 86.70 | 95.80 | 1 | 126.0 | 23.8 | 2 | X |
| SMDJ85A-HR | SMDJ85CA-HR | PGV | DGV | 85.0 | 94.40 | 104.00 | 1 | 137.0 | 21.9 | 2 | X |
| SMDJ90A-HR | SMDJ90CA-HR | PGX | DGX | 90.0 | 100.00 | 111.00 | 1 | 146.0 | 20.5 | 2 | X |
| SMDJ100A-HR | SMDJ100CA-HR | PGZ | DGZ | 100.0 | 111.00 | 123.00 | 1 | 162.0 | 18.5 | 2 | X |
| SMDJ110A-HR | SMDJ110CA-HR | PHE | DHE | 110.0 | 122.00 | 135.00 | 1 | 177.0 | 16.9 | 2 | X |
| SMDJ120A-HR | SMDJ120CA-HR | PHG | DHG | 120.0 | 133.00 | 147.00 | 1 | 193.0 | 15.5 | 2 | X |
| SMDJ130A-HR | SMDJ130CA-HR | PHK | DHK | 130.0 | 144.00 | 159.00 | 1 | 209.0 | 14.4 | 2 | X |
| SMDJ150A-HR | SMDJ150CA-HR | PHM | DHM | 150.0 | 167.00 | 185.00 | 1 | 243.0 | 12.3 | 2 | X |
| SMDJ170A-HR | SMDJ170CA-HR | PHR | DHR | 170.0 | 189.00 | 209.00 | 1 | 275.0 | 10.9 | 2 | X |

Note:

1. Each lot of parts will pass group B test requirements.

SMDJ-HR Series

Surface Mount – 3000W

Screen Process



| | |
|---|-----------------------------------|
| 100% Vision Inspection | MIL-STD-750 method 2074 |
| 100% High Temperature Storage Life (168hrs,175°C) | MIL-STD-750 method 1031 |
| 100% X-RAY inspection | MIL-STD-750 method 2076 |
| 100% Temperature Cycle Test (-55 to 150°C, 20 cycles, dwell time 15 min) | MIL-STD-750 method 1051 |
| 100% Reflow (2X) | JEDEC J-STD-020 |
| 100% Surge Test (2x) | MIL-STD-750 method 4066 |
| 100% HTRB 150°C Bias=VR(80% breakdown voltage, 96hrs, and each direction 96hrs for Bi-directional products) | MIL-STD-750 method 1038 |
| Final Electrical Test(100% 3 sigma limit, 100% dynamic test and PAT limit) | MIL-STD-750 method 4016.4021.4011 |

Note: Up-screen program can be specified by customer's request via contacting Littelfuse service

Group B Test Requirements

| Screen | Method | Condition | Requirement |
|------------------|-------------------------------------|--|---|
| Surge test | 10/1000 μ s Peak Pulse Waveform | Maximum clamping Voltage (V_C) @ Peak Pulse Current (I_{PP}) | Sample Size 45 perform 10x Accept 0 failures |
| Burn - In (HTRB) | MIL -STD-750, Method 1038.5 | Applied voltage 100% V_R @150°C | Sample size 45 340 hours (680 hours for bi-direction products, each direction 340 hours) Accept 0 failures |
| Electrical test | -- | I_R @ V_R , $V_{(BR)}$ @ I_T | Sample size 45 Accept 0 failures |

I-V Curve Characteristics

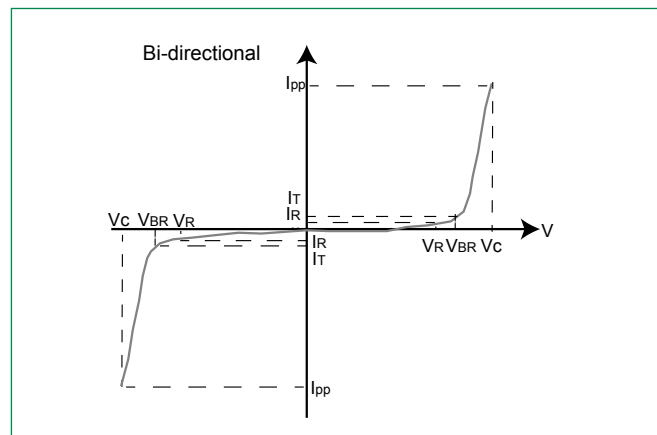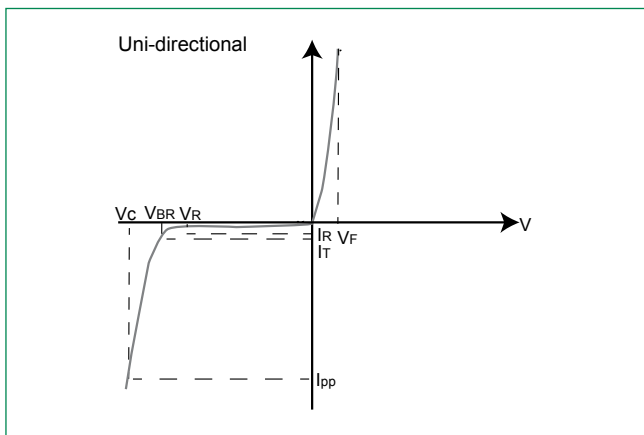

- P_{PPM} Peak Pulse Power Dissipation** -- Max power dissipation
 V_R Stand-off Voltage -- Maximum voltage that can be applied to the TVS without operation
 V_{BR} Breakdown Voltage -- Maximum voltage that flows through the TVS at a specified test current (I_T)
 V_C Clamping Voltage -- Peak voltage measured across the suppressor at a specified I_{PPM} (peak impulse current)
 I_R Reverse Leakage Current -- Current measured at V_R
 V_F Forward Voltage Drop for Uni-directional

SMDJ-HR Series

Surface Mount – 3000W

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Figure 1 -
TVS Transients Clamping Waveform

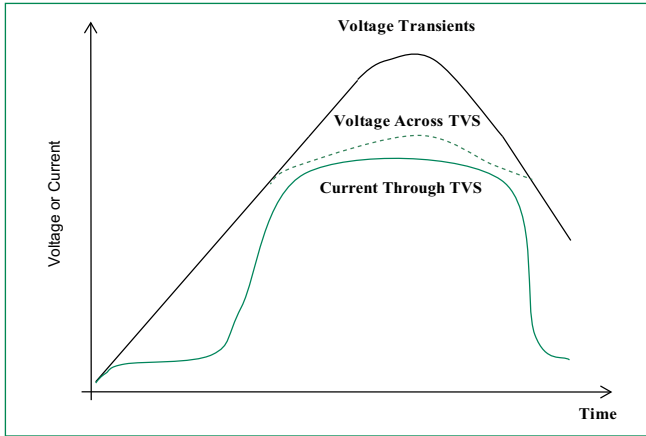


Figure 2 -
Peak Pulse Power Rating

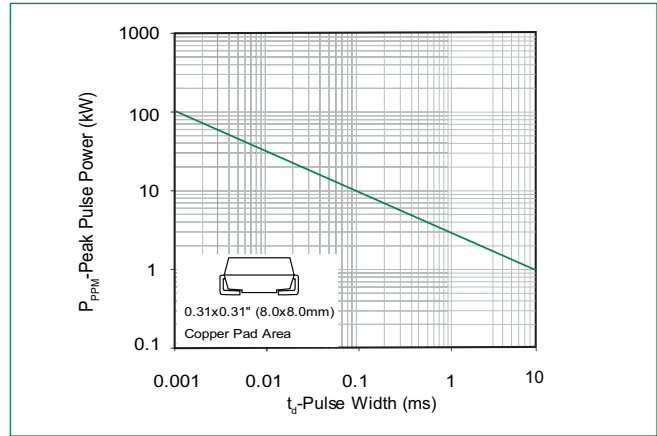


Figure 3 -
Pulse Derating Curve

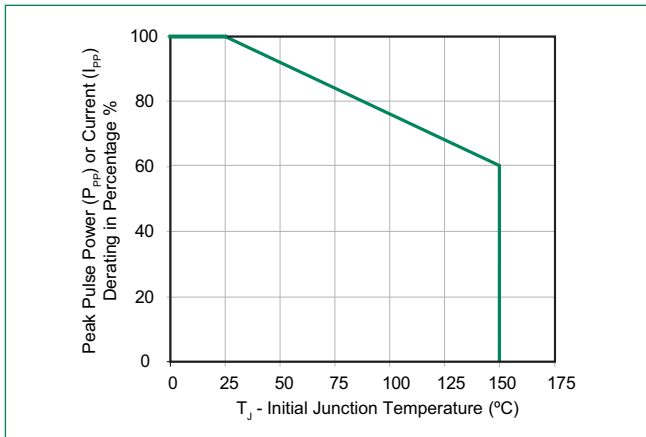


Figure 4 -
Pulse Waveform

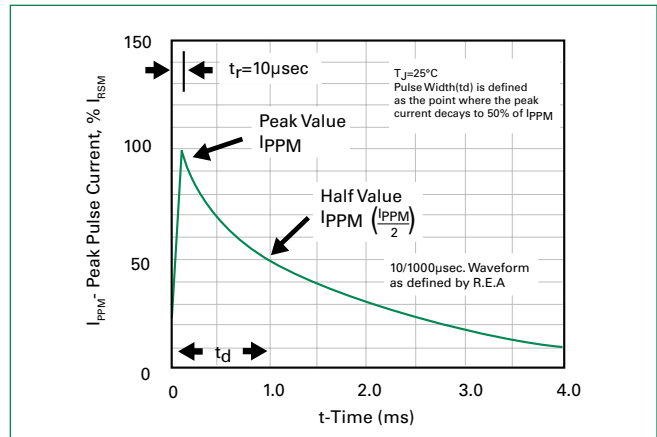


Figure 5 -
Typical Junction Capacitance


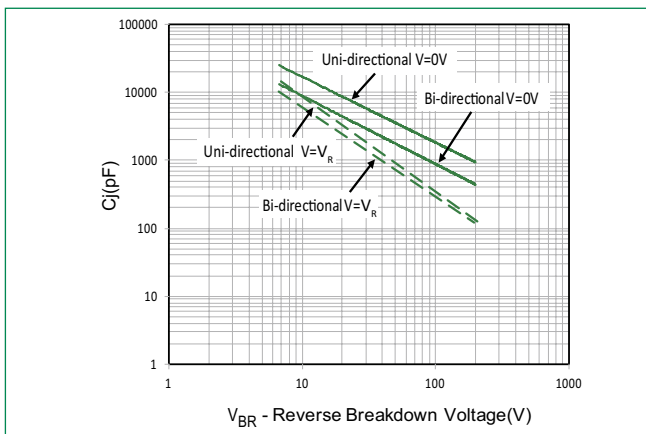



Figure 6 -
Steady State Power Derating Curve

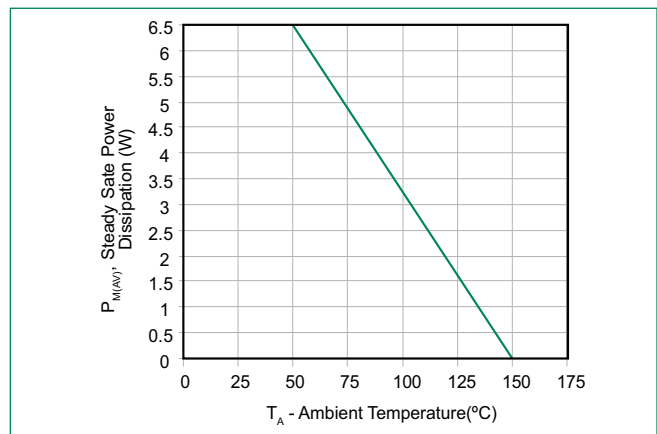

SMDJ-HR Series


Surface Mount – 3000W

Figure 7 -
Maximum Non-Repetitive Peak Forward Surge Current
Uni-Directional only

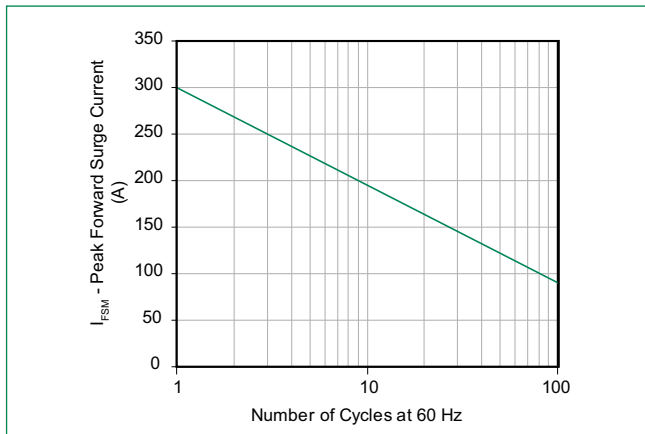

Soldering Parameters

| | | |
|--|------------------------------------|-------------------------|
| Reflow Condition | | Lead-free assembly |
| Pre Heat | - Temperature Min ($T_{s(min)}$) | 150°C |
| | - Temperature Max ($T_{s(max)}$) | 200°C |
| | - Time (min to max) (t_s) | 60 – 180 secs |
| Average ramp up rate (Liquidus Temp (T_L) to peak) | | 3°C/second max |
| $T_{s(max)}$ to T_L - Ramp-up Rate | | 3°C/second max |
| Reflow | - Temperature (T_L) (Liquidus) | 217°C |
| | - Time (min to max) (t_s) | 60 – 150 seconds |
| Peak Temperature (T_p) | | 260 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (t_p) | | 20 – 40 seconds |
| Ramp-down Rate | | 6°C/second max |
| Time 25°C to peak Temperature (T_p) | | 8 minutes Max. |
| Do not exceed | | 260°C |

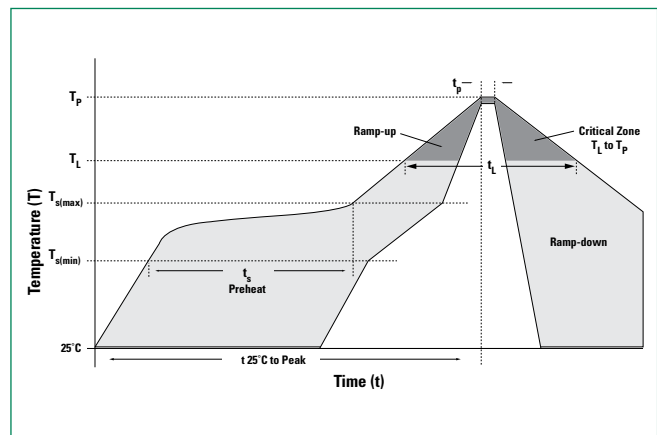

Physical Specifications

| | |
|-----------------|---|
| Weight | 0.007 ounce, 0.21 grams |
| Case | JEDEC DO214AB. Molded plastic body over glass passivated junction |
| Polarity | Color band denotes positive end (cathode) except Bidirectional. |
| Terminal | Matte Tin-plated leads, Solderable per JESD22-B102 |


Environmental Specifications

| | |
|---------------------------|--------------------------|
| High Temp. Storage | JESD22-A103 |
| HTRB | JESD22-A108 |
| Thermal Shock | JESD22-A106 |
| MSL | JEDEC-J-STD-020, Level 1 |
| H3TRB | JESD22-A101 |
| RSH | JESD22-A111 |


SMDJ-HR Series

Surface Mount – 3000W

Part Numbering System

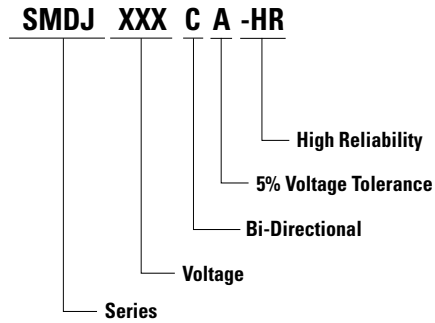


Part Marking System

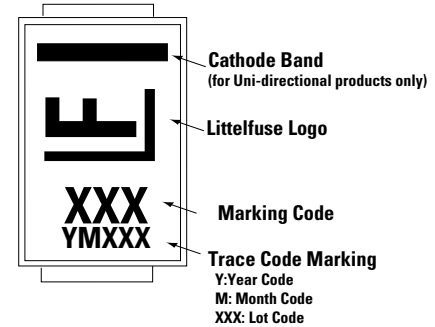

Packaging

| Part number | Component Package | Quantity | Packaging Option | Packaging Specification |
|--------------|-------------------|----------|---------------------------------|-------------------------|
| SMDJxxxXX-HR | DO-214AB | 500 | Tape & Reel – 16mm tape/7" reel | EIA STD RS-481 |

Dimensions


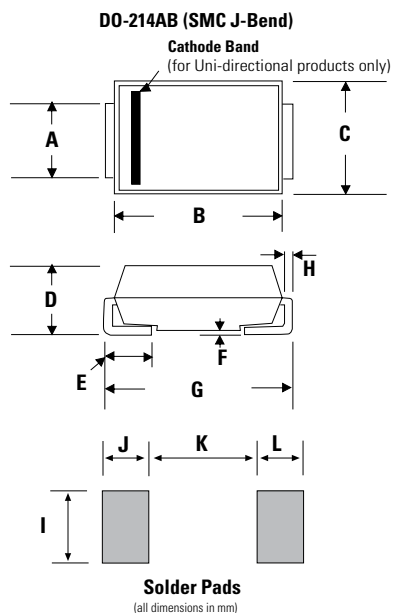


| Dimensions | Inches | | Millimeters | |
|------------|--------|-------|-------------|-------|
| | Min | Max | Min | Max |
| A | 0.114 | 0.126 | 2.900 | 3.200 |
| B | 0.260 | 0.280 | 6.600 | 7.110 |
| C | 0.220 | 0.245 | 5.590 | 6.220 |
| D | 0.079 | 0.103 | 2.060 | 2.620 |
| E | 0.030 | 0.060 | 0.760 | 1.520 |
| F | 0.002 | 0.008 | 0.051 | 0.203 |
| G | 0.305 | 0.320 | 7.750 | 8.130 |
| H | 0.006 | 0.012 | 0.152 | 0.305 |
| I | 0.129 | - | 3.300 | - |
| J | 0.094 | - | 2.400 | - |
| K | - | 0.165 | - | 4.200 |
| L | 0.094 | - | 2.400 | - |


SMDJ-HR Series

Surface Mount – 3000W


Tape and Reel Specification

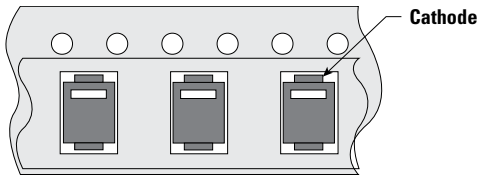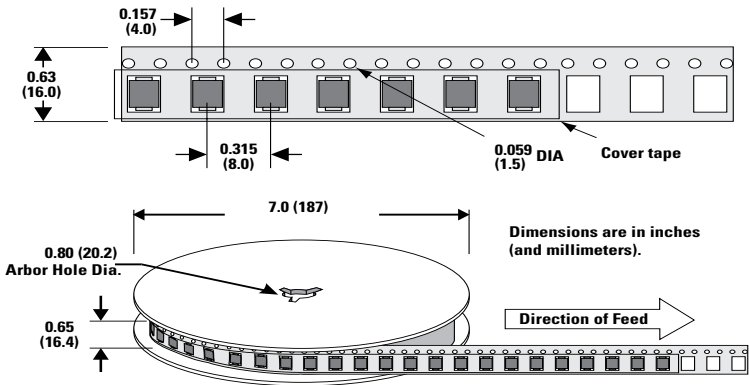


RTCA/DO-160G Wave 3

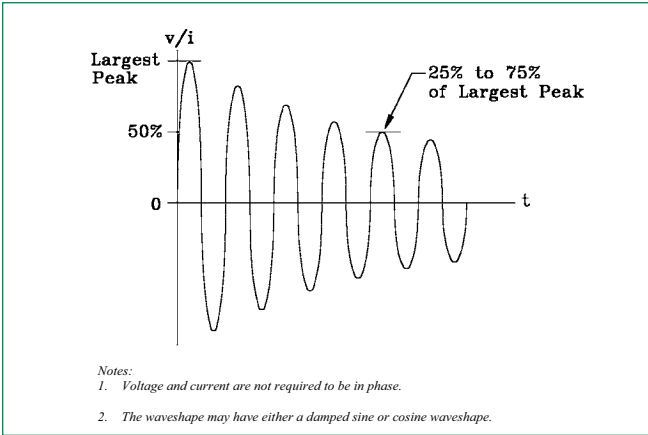

RTCA/DO-160G Wave 4

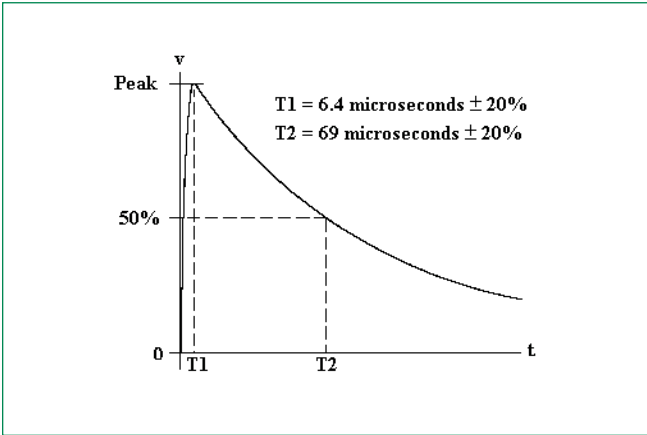

RTCA/DO-160G Wave 5

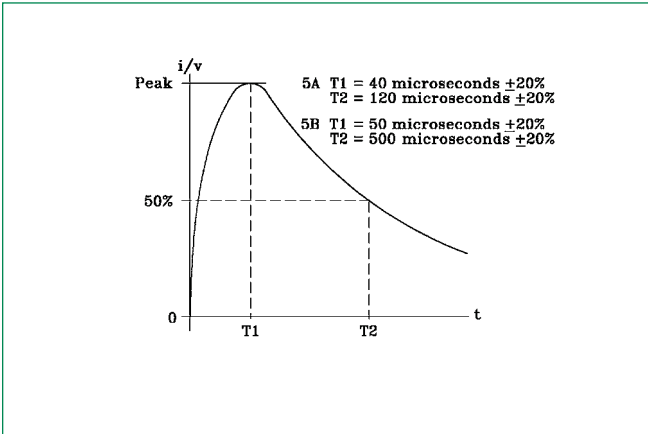

SMDJ-HR Series

Surface Mount – 3000W

Pin Injection Protection Per RTCA/DO-160G

| Part Number (Uni) | Part Number (Bi) | 25C | | | | | | 70C | | | | | | 120C | | | | | | | | |
|-------------------|------------------|--------|-------------------|------|------|------|--------------------|------|--------|-------------------|------|------|------|--------------------|------|--------|-------------------|------|------|------|--------------------|------|
| | | Wave 3 | Wave 4 (6.4/69us) | | | | Wave 5a (40/120us) | | Wave 3 | Wave 4 (6.4/69us) | | | | Wave 5a (40/120us) | | Wave 3 | Wave 4 (6.4/69us) | | | | Wave 5a (40/120us) | |
| | | | L5 | L3 | L4 | L5 | L3 | L4 | | L5 | L3 | L4 | L5 | L3 | L4 | | L5 | L3 | L4 | L5 | L3 | L4 |
| | | | 128A | 60A | 150A | 320A | 300A | 750A | | 128A | 60A | 150A | 320A | 300A | 750A | | 128A | 60A | 150A | 320A | 300A | 750A |
| SMDJ5.0A-HR | SMDJ5.0CA-HR | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | |
| SMDJ6.0A-HR | SMDJ6.0CA-HR | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | |
| SMDJ6.5A-HR | SMDJ6.5CA-HR | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | |
| SMDJ7.0A-HR | SMDJ7.0CA-HR | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | |
| SMDJ7.5A-HR | SMDJ7.5CA-HR | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | |
| SMDJ8.0A-HR | SMDJ8.0CA-HR | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | |
| SMDJ8.5A-HR | SMDJ8.5CA-HR | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | |
| SMDJ9.0A-HR | SMDJ9.0CA-HR | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | |
| SMDJ10A-HR | SMDJ10CA-HR | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | |
| SMDJ11A-HR | SMDJ11CA-HR | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | - | - | - | |
| SMDJ12A-HR | SMDJ12CA-HR | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | - | - | - | |
| SMDJ13A-HR | SMDJ13CA-HR | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | - | - | - | |
| SMDJ14A-HR | SMDJ14CA-HR | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | - | - | - | |
| SMDJ15A-HR | SMDJ15CA-HR | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | - | - | - | |
| SMDJ16A-HR | SMDJ16CA-HR | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | - | - | pass | pass | pass | pass | - | - | - | |
| SMDJ17A-HR | SMDJ17CA-HR | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | - | - | pass | pass | pass | pass | - | - | - | |
| SMDJ18A-HR | SMDJ18CA-HR | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | - | - | pass | pass | pass | pass | - | - | - | |
| SMDJ20A-HR | SMDJ20CA-HR | pass | pass | pass | pass | pass | - | pass | pass | pass | pass | pass | - | - | pass | pass | pass | pass | - | - | - | |
| SMDJ22A-HR | SMDJ22CA-HR | pass | pass | pass | - | - | - | pass | pass | pass | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ24A-HR | SMDJ24CA-HR | pass | pass | pass | - | - | - | pass | pass | pass | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ26A-HR | SMDJ26CA-HR | pass | pass | pass | - | - | - | pass | pass | pass | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ28A-HR | SMDJ28CA-HR | pass | pass | pass | - | - | - | pass | pass | pass | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ30A-HR | SMDJ30CA-HR | pass | pass | pass | - | - | - | pass | pass | pass | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ33A-HR | SMDJ33CA-HR | pass | pass | pass | - | - | - | pass | pass | pass | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ36A-HR | SMDJ36CA-HR | pass | pass | pass | - | - | - | pass | pass | pass | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ40A-HR | SMDJ40CA-HR | pass | pass | pass | - | - | - | pass | pass | pass | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ43A-HR | SMDJ43CA-HR | pass | pass | pass | - | - | - | pass | pass | pass | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ45A-HR | SMDJ45CA-HR | pass | pass | pass | - | - | - | pass | pass | - | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ48A-HR | SMDJ48CA-HR | pass | pass | pass | - | - | - | pass | pass | - | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ51A-HR | SMDJ51CA-HR | pass | pass | pass | - | - | - | pass | pass | - | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ54A-HR | SMDJ54CA-HR | pass | pass | pass | - | - | - | pass | pass | - | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ58A-HR | - | pass | pass | - | - | - | - | pass | pass | - | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ60A-HR | - | pass | pass | - | - | - | - | pass | pass | - | - | - | - | pass | pass | pass | pass | - | - | - | - | |
| SMDJ64A-HR | - | pass | pass | - | - | - | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | - | - | |
| SMDJ70A-HR | - | pass | pass | - | - | - | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | - | - | |
| SMDJ75A-HR | - | pass | pass | - | - | - | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | - | - | |
| SMDJ78A-HR | - | pass | pass | - | - | - | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | - | - | |
| SMDJ85A-HR | - | pass | pass | - | - | - | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | - | - | |
| SMDJ90A-HR | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | pass | - | - | - | - | - | - | - | |
| SMDJ100A-HR | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | pass | - | - | - | - | - | - | - | |
| SMDJ110A-HR | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | pass | - | - | - | - | - | - | - | |
| SMDJ120A-HR | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | pass | - | - | - | - | - | - | - | |
| SMDJ130A-HR | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | pass | - | - | - | - | - | - | - | |
| SMDJ150A-HR | - | pass | pass | - | - | - | - | pass | - | - | - | - | - | pass | - | - | - | - | - | - | - | |

Note:

1. L1 = Level 1, L2 = Level 2, L3 = Level 3, L4 = Level 4, L5 = Level 5

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.