

**SMTAK3 Series**



**Agency Recognitions**


Agency	Agency File Number
	E128662

**Maximum Ratings and Thermal Characteristics**  
(T<sub>A</sub>=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Operating Storage Temperature Range	T <sub>STG</sub>	-55 to 150	°C
Operating Junction Temperature Range	T <sub>J</sub>	-55 to 125	°C
Current Rating <sup>1</sup>	I <sub>pp</sub>	3	kA

**Note:**  
1. Rated I<sub>pp</sub> measured with 8/20µs pulse.

**Functional Diagram**

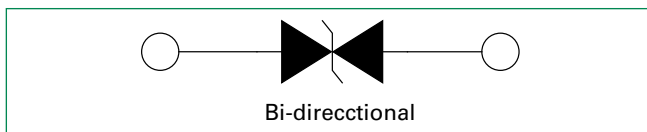

**Description**

The SMTAK3 series of high current transient suppressors have been specially designed for use in D.C. line protection and any demanding applications. They offer superior clamping characteristics over standard S.A.D. technologies by virtue of the Littelfuse Foldbak technology. Therefore, any voltage rise due to increased current conduction is contained to a minimum, providing the best possible protection level.

**Features**

- Very low clamping voltage
- Sharp breakdown voltage
- Low slope resistance
- Bi-directional
- Foldbak technology for superior clamping factor
- Symmetric in leads width for easier soldering during assembly.
- IEC 61000-4-2 ESD 15kV(Air), 8kV (Contact)
- ESD protection of data lines in accordance with IEC 61000-4-2
- EFT protection of data lines in accordance with IEC 61000-4-4
- Halogen-free
- RoHS compliant
- Glass passivated junction
- Pb-free E4 means 2nd level interconnect is Pb-free and the terminal finish material is silver (IPC/JEDEC J-STD-609A.01)
- UL Recognized to ANSI/UL 497B


**Electrical Characteristics** (T<sub>A</sub>=25°C unless otherwise noted)

Part Numbers	Part Marking	Standoff Voltage (V <sub>SO</sub> ) Volts	Max. Reverse Leakage (I <sub>R</sub> @ V <sub>SO</sub> ) µA	Typical I <sub>R</sub> @ 85°C (µA)	Reverse Breakdown Voltage V <sub>BR</sub> (Volts) @ I <sub>T</sub>		Test Current I <sub>T</sub> (mA)	Max. Clamping Voltage V <sub>CL</sub> @ I <sub>pp</sub> Peak Pulse Current (I <sub>pp</sub> ) (Note 1)		Max. Temp Coefficient OF V <sub>BR</sub> (%/°C)	Max. Capacitance 0 Bias 10kHz (nF)	Agency Approval
					Min	Max		V <sub>CL</sub> Volts	I <sub>pp</sub> Amps			
SMTAK3-015C	S3-015C	15	10	15	16	19	10	28	3,000	0.1	9.0	X
SMTAK3-058C	S3-058C	58	10	15	64	70	10	110	3,000	0.1	6.0	X
SMTAK3-066C	S3-066C	66	10	15	72	80	10	120	3,000	0.1	6.0	X
SMTAK3-076C	S3-076C	76	10	15	85	95	10	140	3,000	0.1	6.0	X

**Note:**  
1. Using 8/20µs wave shape as defined in IEC 61000-4-5.

**Soldering Parameters**

<b>Reflow Condition</b>		Lead-free assembly
<b>Pre Heat</b>	- Temperature Min ( $T_{s(min)}$ )	150°C
	- Temperature Max ( $T_{s(max)}$ )	200°C
	- Time (min to max) ( $t_p$ )	60 – 120 secs
<b>Average ramp up rate (Liquidus Temp (<math>T_L</math>) to peak)</b>		3°C/second max
<b><math>T_{s(max)}</math> to <math>T_A</math> - Ramp-up Rate</b>		3°C/second max
<b>Reflow</b>	- Temperature ( $T_L$ ) (Liquidus)	217°C
	- Time (min to max) ( $t_p$ )	60 – 150 seconds
<b>Peak Temperature (<math>T_p</math>)</b>		260 <sup>+0/-5</sup> °C
<b>Time within 5°C of actual peak Temperature (<math>t_p</math>)</b>		30 seconds max
<b>Ramp-down Rate</b>		6°C/second max
<b>Time 25°C to peak Temperature (<math>T_p</math>)</b>		8 minutes Max.
<b>Do not exceed</b>		260°C

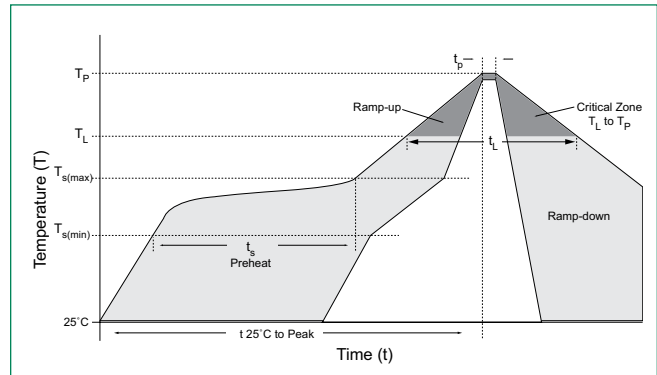

**Flow/Wave Soldering (Solder Dipping)**


<b>Peak Temperature :</b>	265°C
<b>Dipping Time :</b>	10 seconds
<b>Soldering :</b>	1 time

**Physical Specifications**


<b>Weight</b>	Contact manufacturer
<b>Case</b>	Compound encapsulated
<b>Terminal</b>	Silver plated leads, solderable per MIL-STD-202 Method 208

**Wave Solder Profile**

**Figure 1 - Non Lead-free Profile**

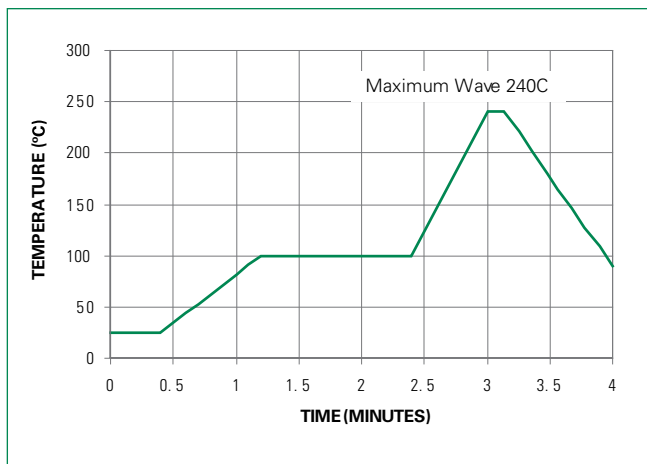


**Figure 2 - Lead-free Profile**

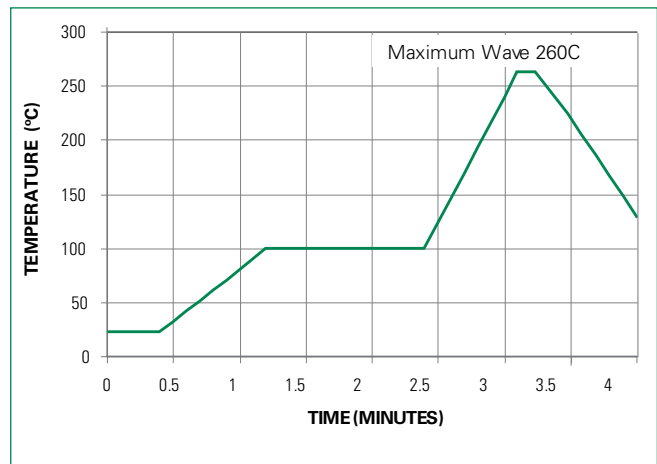


**Ratings and Characteristic Curves** ( $T_A=25^\circ\text{C}$  unless otherwise noted)


**Figure 3 - Peak Power Derating**

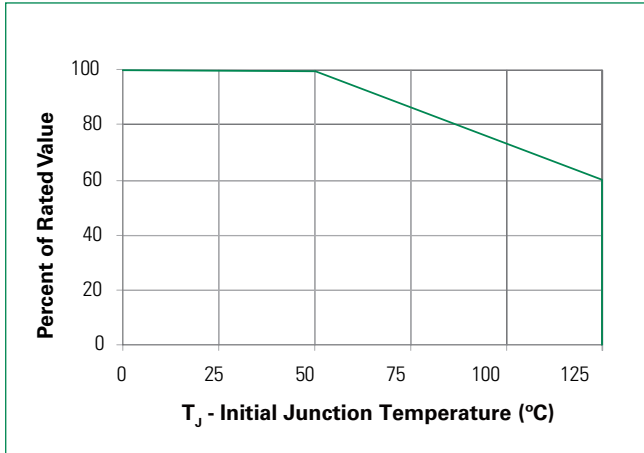


**Figure 4 - Typical Peak Pulse Power Rating Curve**

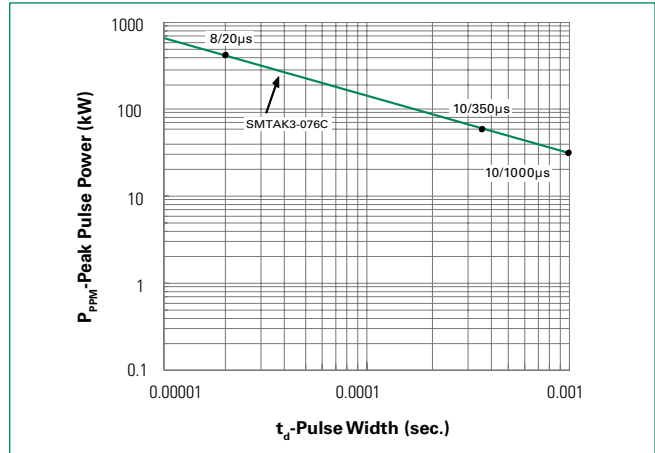


**Figure 5 - Typical  $V_{BR}$  Vs Junction Temperature**

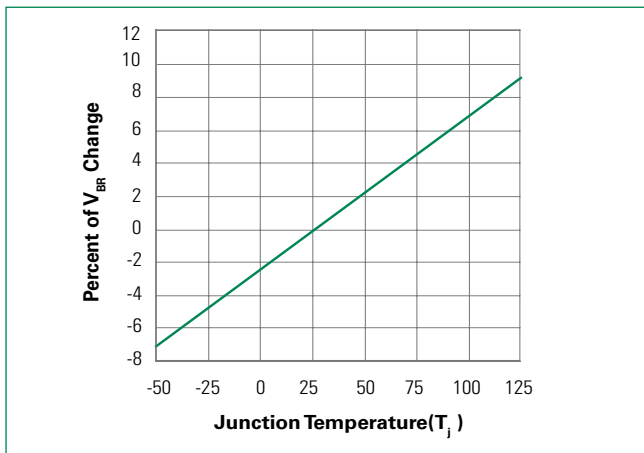


**Figure 6 - Surge Response (8/20 Surge current waveform)**

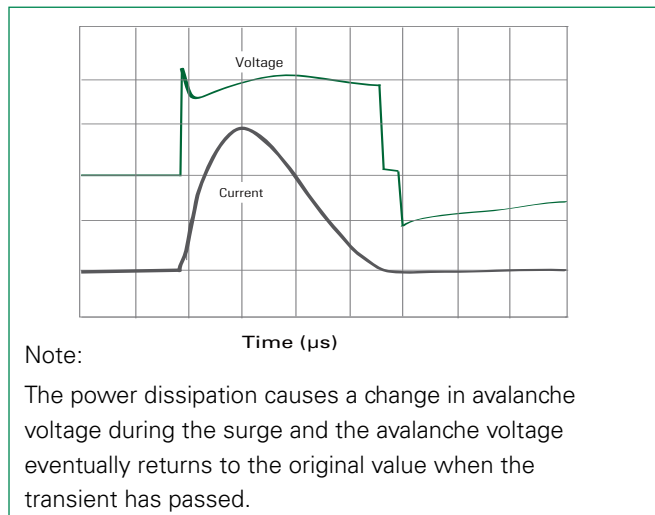

**Figure 7 - Pulse Waveform**

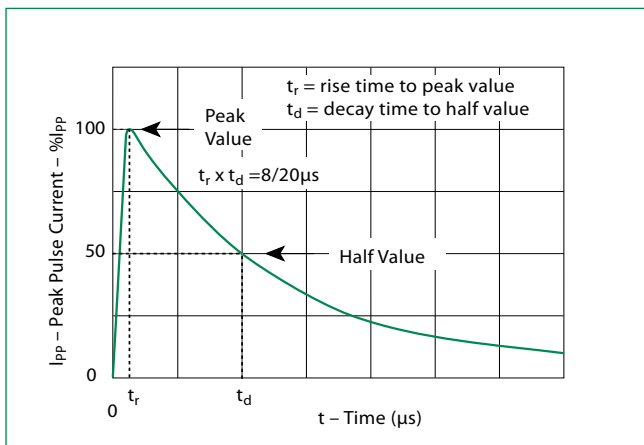


**Dimensions**

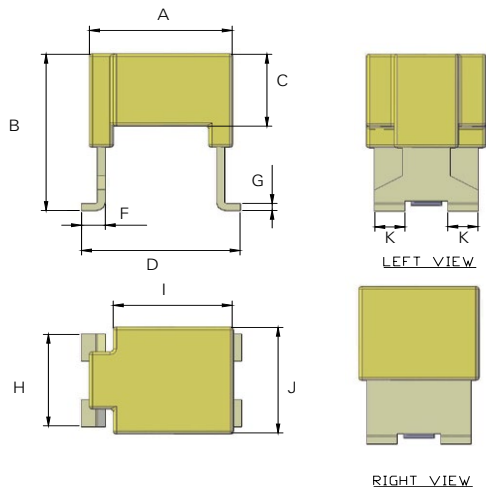


Dimensions	Inches	Millimeters
A	0.354 +0.059/- 0.020	9.0 +1.5/- 0.5
B-SMTAK3-015C	0.362 +/- 0.059	9.2 +/- 1.5
B-SMTAK3-058C/ 066C/076C	0.394 +/- 0.039	10.0 +/- 1.0
C-SMTAK3-015C	0.205 REF	5.2 REF
C-SMTAK3-058C/ 066C/076C	0.264 REF	6.7 REF
D	0.366 +/- 0.020	9.3 +/- 0.5
F	0.045 +/- 0.012	1.15 +/- 0.3
G	0.020 +/- 0.008	0.5 +/- 0.2
H	0.256 +/- 0.020	6.5 +/- 0.5
I	0.319 REF	8.1 REF
J	0.295 +0.059/- 0.020	7.5 +1.5/- 0.5
K	0.075 +/- 0.020	1.9 +/- 0.5

**Part Numbering System**




**Part Marking System**

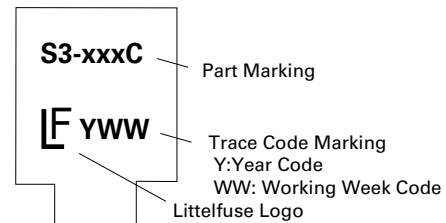

**Packing Options**

Part Number	Component Package	Packing Mode	Quantity
SMTAK3-xxxC	SMTAK Package	Tape & Reel – 32mm/13" tape	200
SMTAK3-xxxC-B	SMTAK Package	Bulk	100

**Tape and Reel Specification**

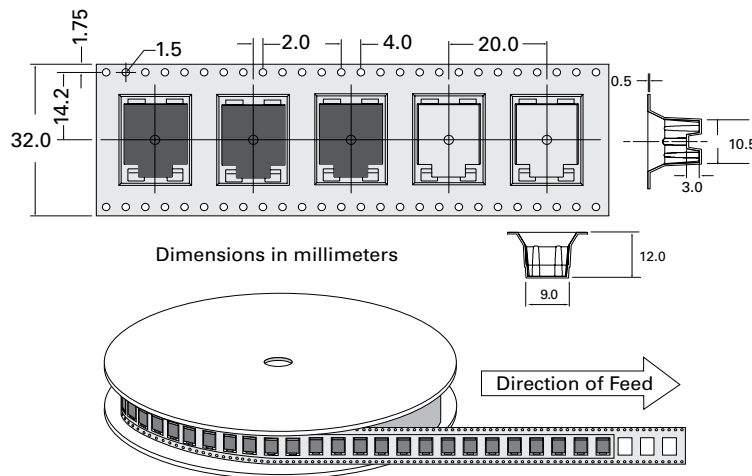

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.