# M550

| MM | IN |
|---|---|
| 34.04 | 1.340 |
| 36.57 | 1.440 |
| 60.70 | 2.390 |
| 74.16 | 2.920 |

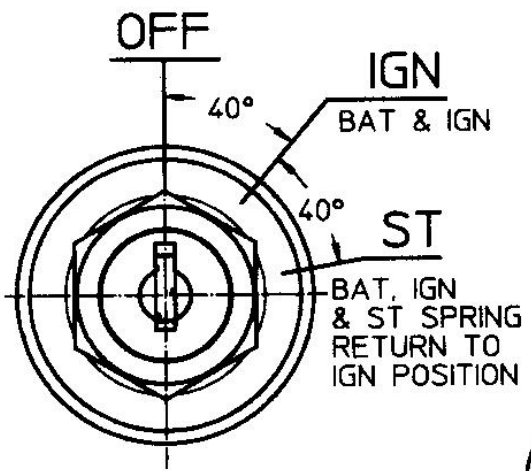


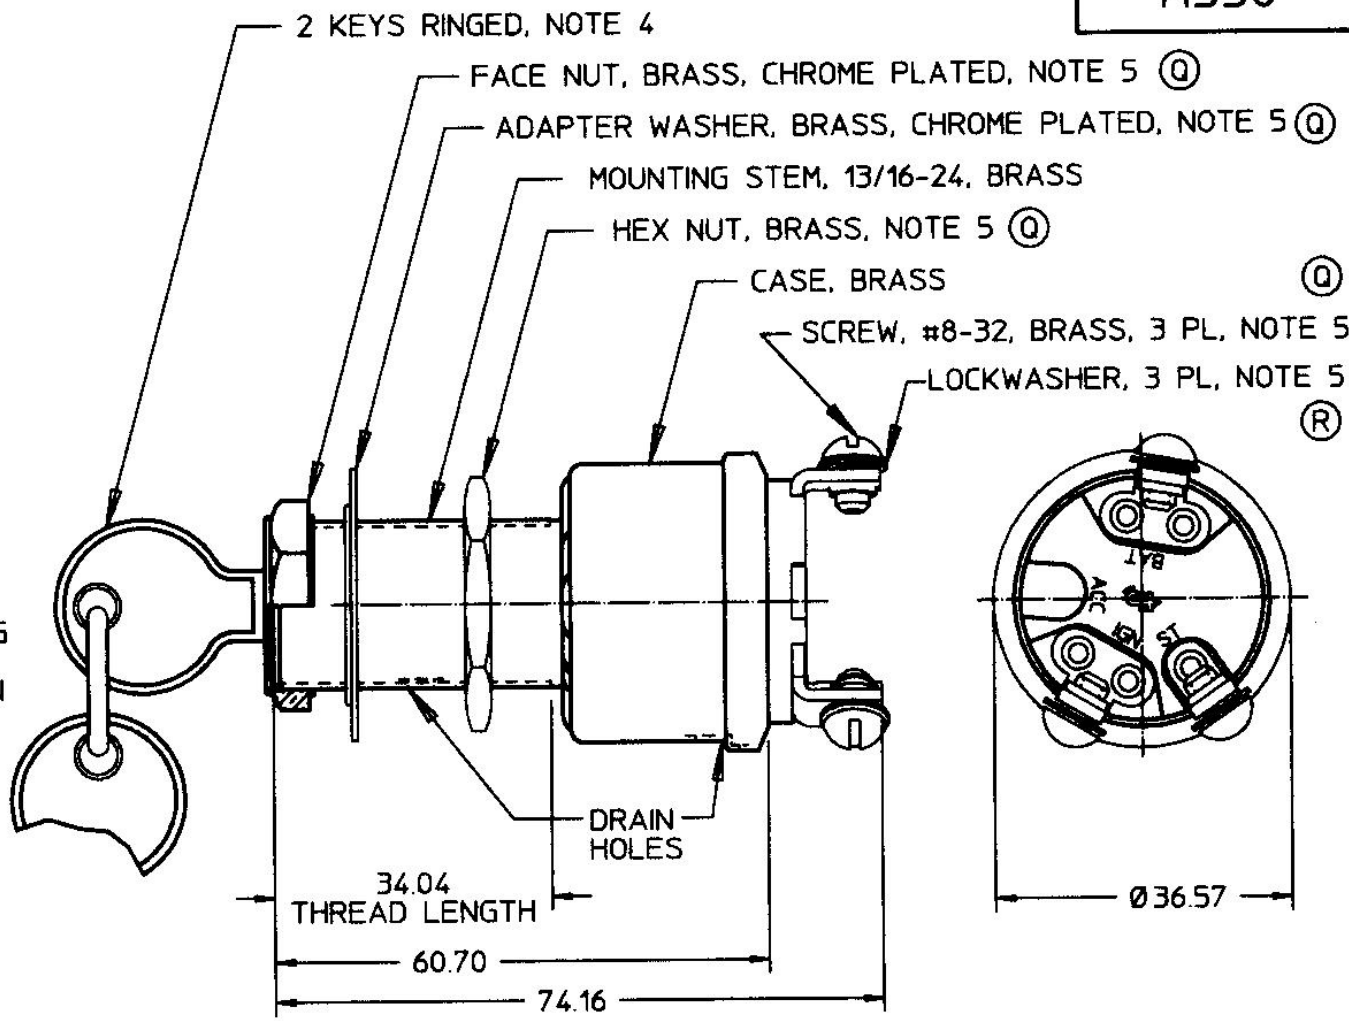


NOTES:
1. ALL DIMENSIONS ARE REFERENCE ONLY
2. RATING: 12V DC, 10 AMPS PER CIRUIT, 15 AMPS MAX
3. APPLICABLE SAE STANDARD OR RECOMMENDED PRACTICE SAE J259
4. LOCK & KEYS SUPPLIED IN RANDOM KEY CODES: CH-501, CH-502, CH-503, CH-504, CH-505 CH-506, CH-510, CH-512, CH-516, CH-523
Q 5. PARTS MAYBE ASSEMBLED OR SUPPPLIED IN A PLASTIC BAG

**Confidential Property of Cole Hersee**

METRIC

**DO NOT SCALE**

| LET. | WAS | DATE | BY | LET. | WAS | DATE | BY |
|---|---|---|---|---|---|---|---|
| | | | | | | | |
| | | | | | | | |
| | | | | R | ECN #98118 ADDED L'WSHR | 2/11/98 | JMP |
| | | | | Q | ECN #26813 | 7/16/97 | AJS |
| | | | | P | PUT ON CAD | 7/26/96 | DPS |

| MATERIAL | DRAWN | CHK | APVD | SCALE | | DATE DRAWN |
|---|---|---|---|---|---|---|
| | DPS | TY | | 1:1 | | 2/4/78 |
| FINISH | Cole Hersee Co. 20 OLD COLONY AVENUE, BOSTON, MA., U.S.A., 02127 | | | | | DATE BLUEPRINTED |
| TOLERANCES DECIMAL ± ANGLE ± | SW, ROT, IGN | | | | | M550 |