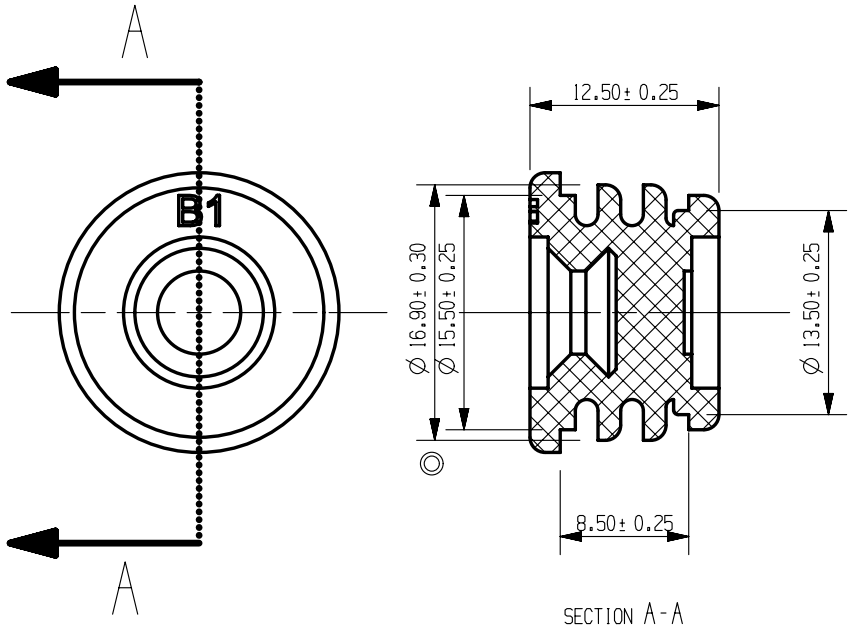


NOTES:
1. MATERIAL:SILICON RUBBER
2. GRAY COLOR
3. 30 DURE HARD ◎

METRIC
COMPONENT

| LTR | REVISION | CHK | APD |
|---|---|---|---|
| A | 504799ERA NEW RELEASED EJIN | | |

| NO | COMPONENT NO | DESCRIPTION | QTY/M | U/M |
|---|---|---|---|---|
| - | | | | |

BILL OF MATERIAL

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS.
DIMENSIONS IN BRACKETS [ ] ARE INCHES

UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.

| | |
|---|---|
| ◎ | DENOTES CRITICAL CHARACTERISTICS. |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE |
| ⟨ST⟩ | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE |

COPIES TO

| | | |
|---|---|---|
| 1 | 9 | 18 |
| 2 | 10 | 19 |
| 3 | 12 | 20 |
| 4 | 13 | 21 |
| 5 | 14 | 23 |
| 6 | 15 | 33 |
| 7 | 16 | 43 |
| 8 | 17 | 53 |

MATL SPEC: SEE NOTES

FINISH: N/A

| | | |
|---|---|---|
| DRW EJIN | DATE 03/29/12 | SCALE 1:1 |
| CHK | DATE | SUPER DR |
| APPD | DATE | FINSH GOOD WT GRAMS/PIECE |

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-fH)

| DIMENSION | 0.5 - 3 (UP TO) | 3 - 6 (OVER / UP TO) | 6 - 30 (OVER / UP TO) | 30 - 120 (OVER / UP TO) | 120 - 400 (OVER / UP TO) |
|---|---|---|---|---|---|
| TOLERANCE | | | | | |

3RD ANGLE PROJECTION

TITLE: BLANK_1 CABLE SEAL

Littelfuse®
DES PLAINES, ILLINOIS 60016

REVISION: A

DRWG. NO.: OL-868-951

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED