NOTES:
1. MATERIAL: COPPER C1100, TIN PLATED
2. UNLESS OTHERWISE NOTED, BURR SHALL NOT EXCEED 10% OF THE RAW MATERIAL THICKNESS AT ANY LOCATION
3. PART TO BE CLEAN, DEGREASED, FREE OF CONTAMINATION

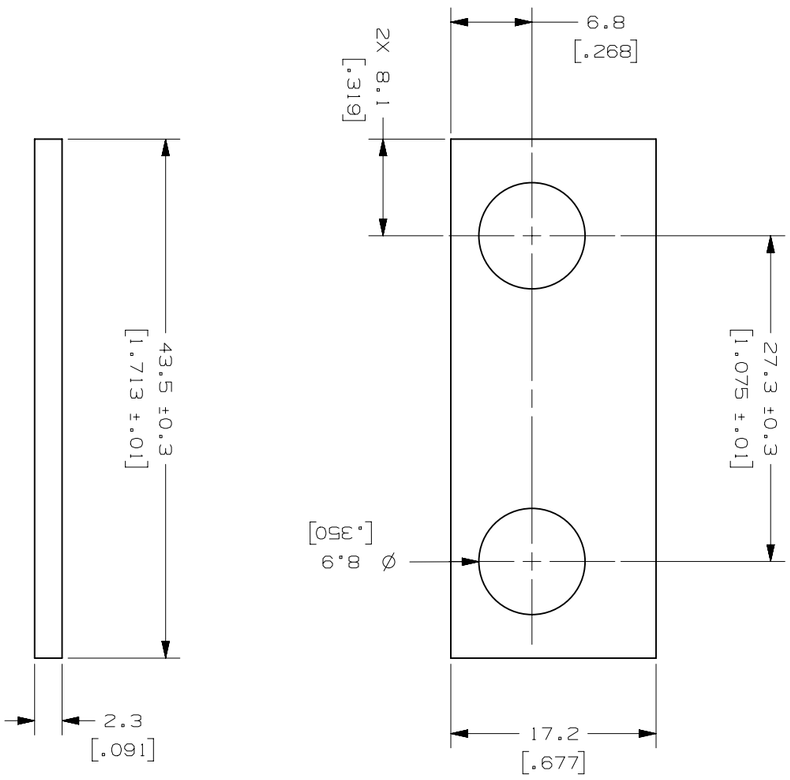

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN BRACKETS [ ] ARE INCHES	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS DO NOT INCLUDE PLATING.	
◎	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
ST	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE

NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M

BILL OF MATERIAL

LTR	DATE	REVISION	CHK APD
B	07/10/13	508BB1ECA-THICKNESS 2.3 WAS 2.0 FYUE	
A	06/26/13	508674ERA-RELEASE FYUE	

COPIES TO

1	9	18
2	10	19
3	12	20
4	13	21
5	14	23
6	15	33
7	16	43
8	17	53

MATL SPEC: SEE NOTE

FINISH: SEE NOTE

DRW	DATE	SCALE
FYUE	06/26/13	2:1
CHK	DATE	SUPER DR
APPD	DATE	FINSH GOOD WT GRAMS/PIECE

TOLERANCES UNLESS OTHERWISE SPECIFIED (REF. ISO 2768-fH)

DIMENSION	UP TO 3	OVER 3 UP TO 6	OVER 6 UP TO 30	OVER 30 UP TO 120	OVER 120 UP TO 400
TOLERANCE	±0.05	±0.05	±0.1	±0.15	±0.2

3RD ANGLE PROJECTION

TITLE: 2 POSITION BUS BAR - FLEX MIDI HOLDER

Littelfuse®
CHICAGO, USA 773-628-1000

REVISION	DRWG. NO.
B	OL-882-267-002

CAD GENERATED DRAWING - NO PENCIL CHANGES ALLOWED (rev C)