
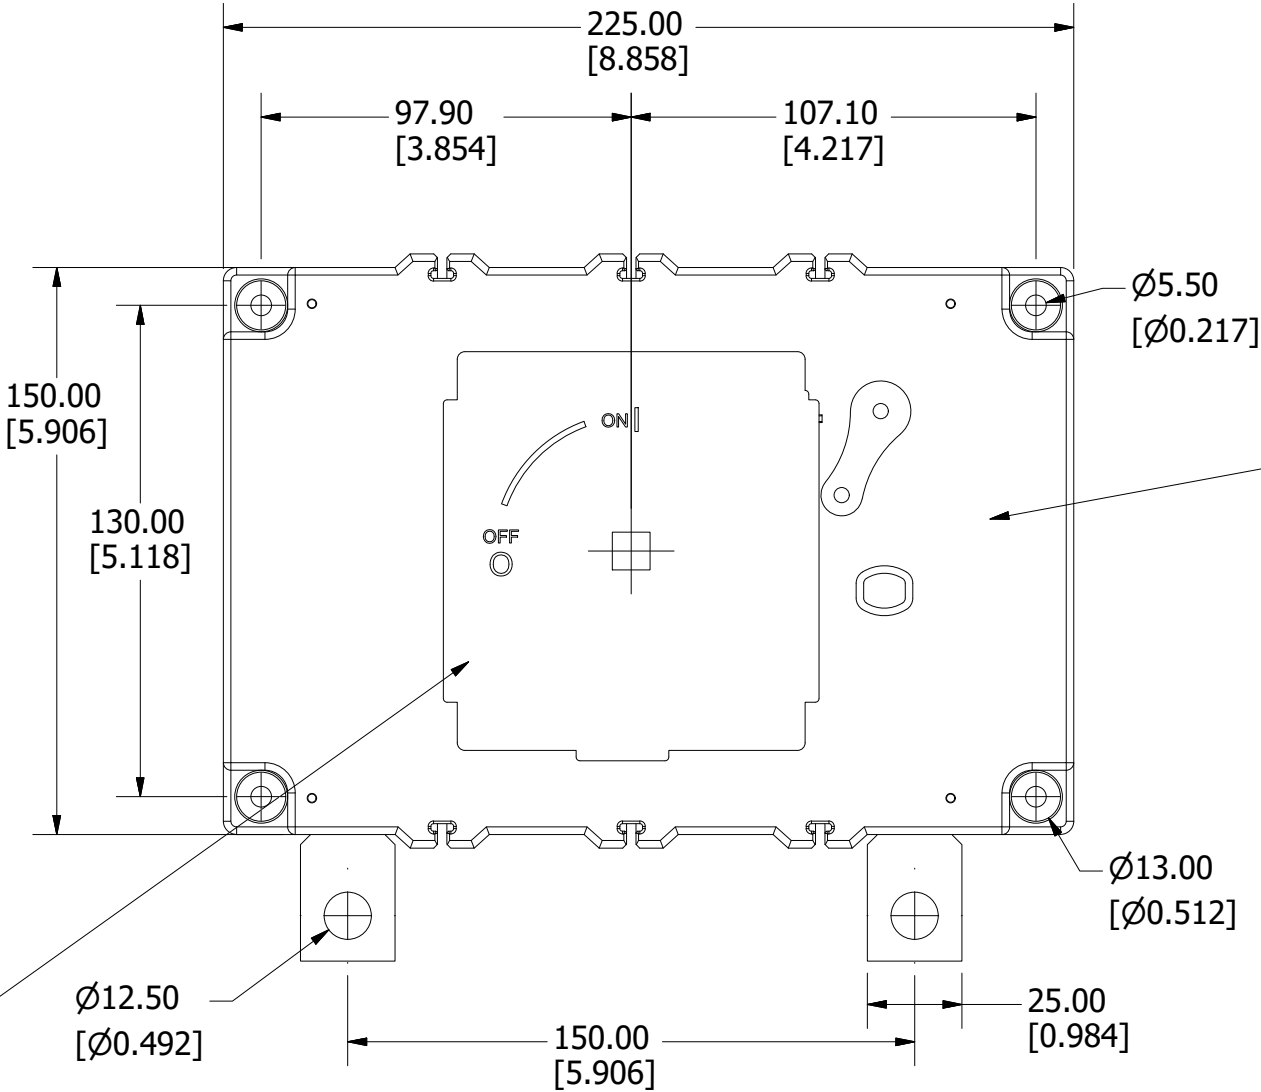


| PART NUMBER   | UPC CODE    |
|---------------|-------------|
| LS602501MS00L | 07945826640 |


| REVISION |         |                         |
|----------|---------|-------------------------|
| REV      | DATE    | DESCRIPTION             |
| A        | 4/21/20 | 522213GCP - RELEASE MRY |

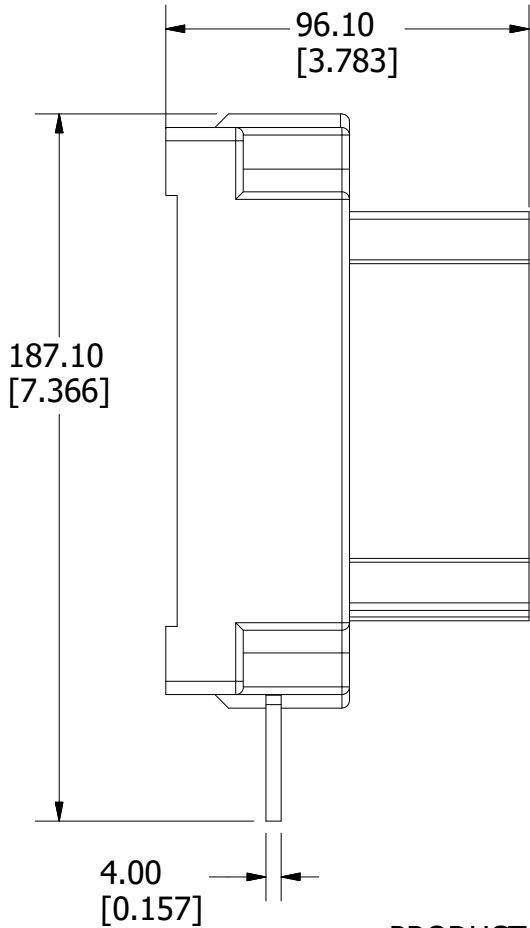

SPEC LABEL

|                           |                           |            |
|---------------------------|---------------------------|------------|
| See instructions 4407Z012 | Par apriete terminal lugs |            |
|                           | Terminal torque           |            |
|                           | Couple de serrage         | 18 Nxm     |
|                           | des terminaux             | 159 lbf.in |
|                           | Bolsa terminales          |            |
|                           | Kit terminal lugs         | LDRTL11W   |
|                           | Kit de terminaux          |            |
|                           | Tipo cable                |            |
|                           | Wire type                 | Cu         |
|                           | Type de câble             |            |
|                           | Rango de temperatura      |            |
|                           | Temperature rating        |            |
|                           | Intervale de              | 75 °C      |
|                           | temperatures              |            |
|                           | Fecha de fabricación      |            |
|                           | Manufacture date          | 01/08/20   |
|                           | Date de fabrication       |            |

PRODUCT LABEL

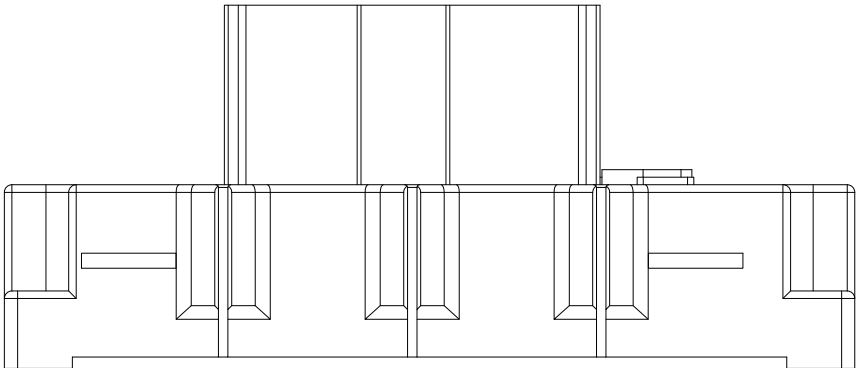

|                                                                                                                                                                                                             |  |                                                                                                                                                                          |                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| <S>                                                                                                                                                                                                         |  | CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE                                                                                                                       |                           |
| ●                                                                                                                                                                                                           |  | DENOTES CRITICAL CHARACTERISTICS.                                                                                                                                        |                           |
| CPK                                                                                                                                                                                                         |  | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE                                                                                                                               |                           |
| ST                                                                                                                                                                                                          |  | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |                           |
| CP                                                                                                                                                                                                          |  | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.               |                           |
| MATL SPEC                                                                                                                                                                                                   |  | FINISH                                                                                                                                                                   |                           |
| DRW myork                                                                                                                                                                                                   |  | DATE 11/11/2019                                                                                                                                                          | SCALE NTS                 |
|                                                                                                                                                                                                             |  | FINISH GOOD WT GRAMS/PIECE                                                                                                                                               |                           |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 |  |                                                                                                                                                                          |                           |
| 3RD ANGLE PROJECTION                                                                                                                                                                                        |  |                                                                                                                                                                          |                           |
| TITLE DISCONNECT SWITCH 250A 1000VDC 1 POLE OUTLINE                                                                                                                                                         |  |                                                                                                                                                                          |                           |
| Littelfuse®<br>CHICAGO, ILLINOIS 60631                                                                                                                                                                      |  | REVISION A                                                                                                                                                               | DRWG NO. OL-LS602501MS00L |
|                                                                                                                                                                                                             |  | SHEET 1 OF 1                                                                                                                                                             |                           |