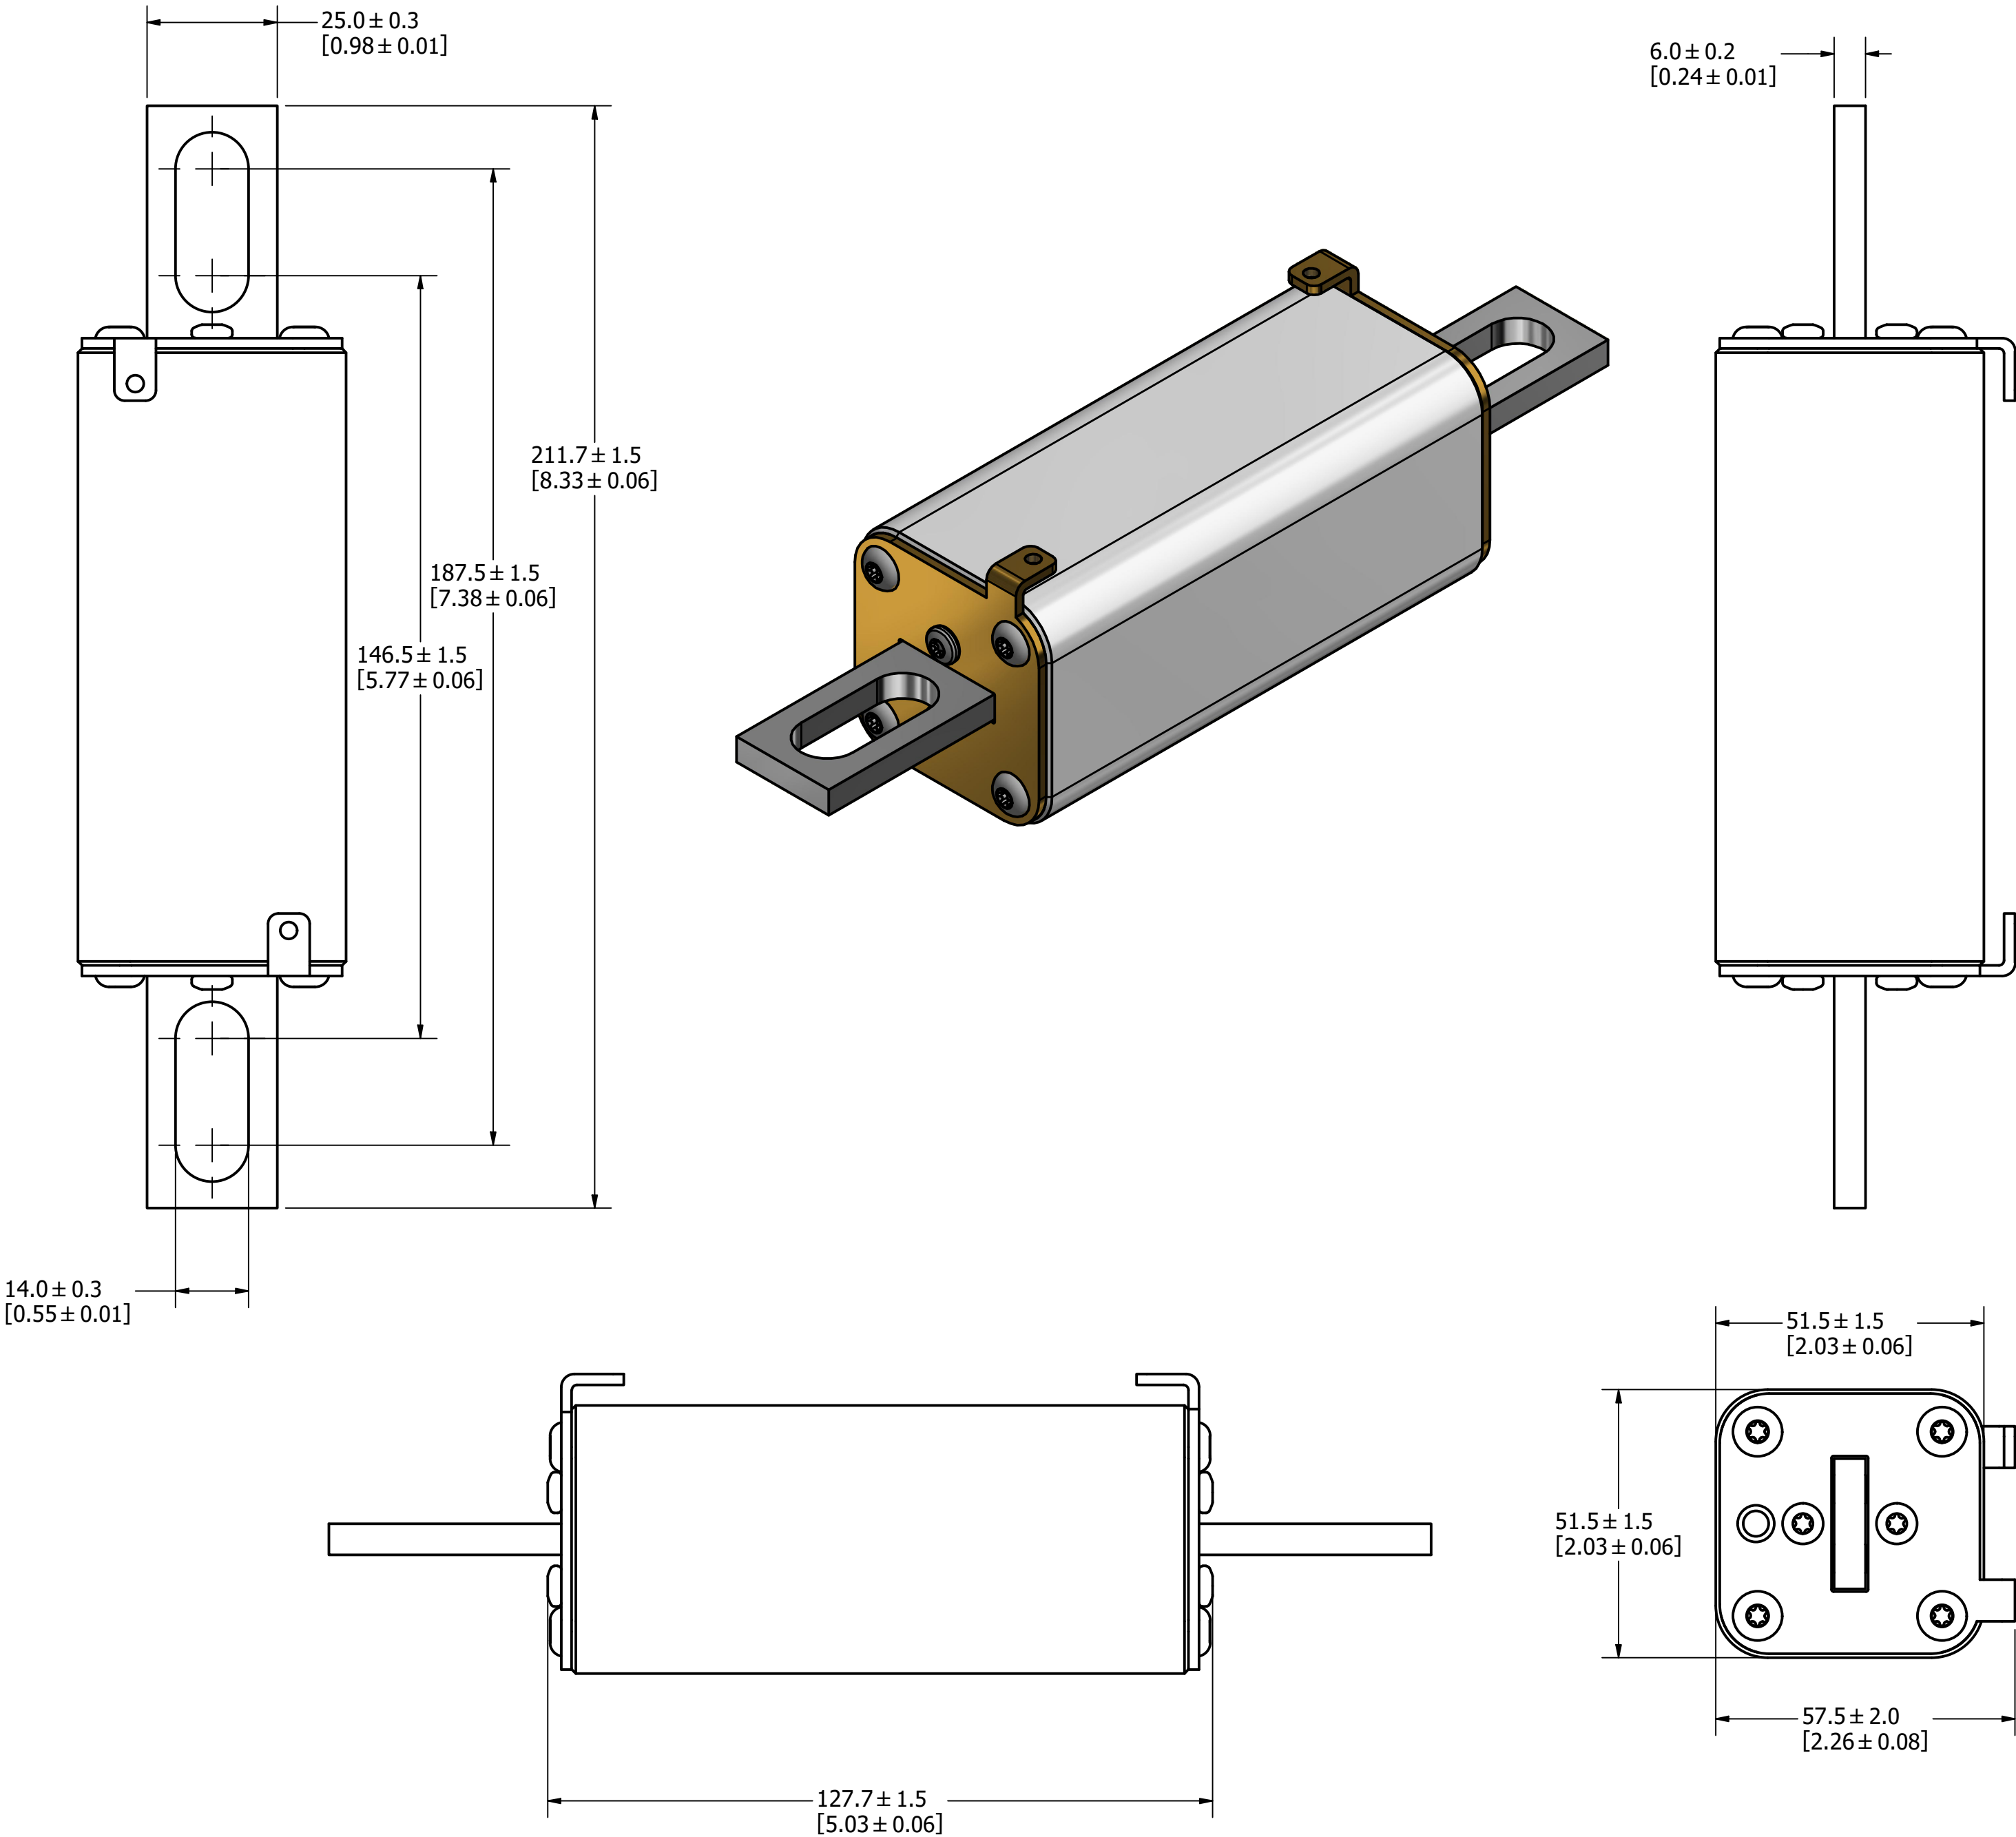




MOUNTING SPECS:

RECOMMENDED FASTENER: M12 OR 1/2"
TIGHTENING TORQUE (REFERENCE ONLY): 64Nm

| REVISION | | |
|----------|--------|-------------------------|
| REV | DATE | DESCRIPTION |
| A | 6/7/22 | 525305GCP - RELEASE MRY |



FOR REFERENCE ONLY

| | | | |
|---|--|------------|---------------------------------------|
| <S> | CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE | | |
| ● | DENOTES CRITICAL CHARACTERISTICS. | | |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE | | |
| (ST) | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. | | |
| CP | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE. | | |
| MATL SPEC | | FINISH | |
| DRW myork | DATE 6/6/2022 | SCALE NTS | FINISH GOOD WT GRAMS/PIECE |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994 | | | |
| 3RD ANGLE PROJECTION | | | |
|  | | | |
| TITLE ESR SIZE 1XL BOLTED (UB) FUSE OUTLINE | | | |
|  Littelfuse® CHICAGO, ILLINOIS 60631 | | REVISION A | DRWG NO. OL-ESR1XLUB0000 SHEET 1 OF 1 |