

2


REVISIONS											
ZONE	REV.	DESCRIPTION	DATE	APPROVED							
	Α	522970GCC NEW RELEASE DRAWING	04/MAR/2021	EDWARD J							
	В	523612ECC UPDATE CIRCUIT DIAGRAM	09/APRIL/2021	EDWARD J							
	С	523692 ECC CHANGE THE MOLDED CONTENTS TO LASER MARKING	11/MAY/2021	EDWARD.J							


1


Е


D

С

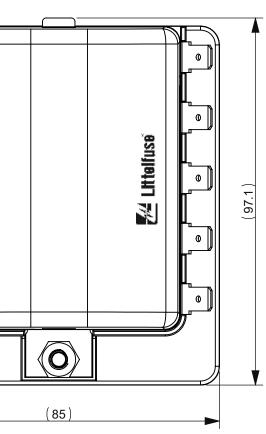



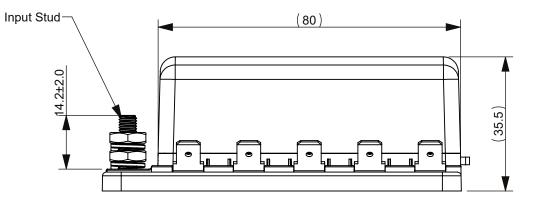

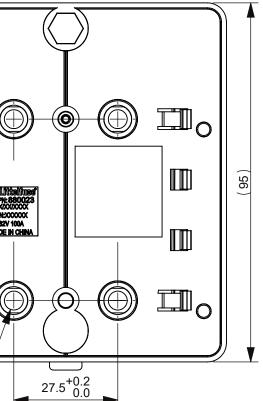

- NOTES:
- 1. MATERIALS: BASE/HOUSING: BLACK PBT COVER: TRANSPEARANCE PC TERMINAL: TINNED COPPER PUSH BOTTOM:POM WHITE 2. FUSES ASSEMBLY BY HANDS.
- 3. ALL FUSES MUST NOT EXCEED 70% OF RATED CURRENT
- 4. RED LED INDICATES WHEN FUSE IS BROKEN.

									В					
	DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14 5-1994.													
	FIT FUNCTION CRITICAL CHARACTERISTICS SYMBOL													
<s></s>	SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL													
CPK	DENOTES CPK DIMENSIONS MINIMUM CPK VALUE													
$\langle ST \rangle$	ST DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS													
СР	CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE													
	DIMENSION; MM TOLERANCES UNLESS OTHERWISE SPECIFIED ONE PLACE DECIMAL ± 0.5 THREE PLACES DECIMAL ± 0.100 TWO PLACES DECIMAL ± 0.20 ANGULAR ± 2°													
-	NAME	DATE				. 16	@							
DRAWN	Sunny Pan	22/OCT/2020			LĪŤ	telfuse	Ň							
CHECKED	Jason Li	22/OCT/2020	_						•					
	-	-		-	Applied	Answers De	elivered		A					
	-	-	TITL	.E										
	M NO: CVP-PE40-0006 REV A			STD DUTY ATO PDM 10 POS										
THIRD A	NGLE PROJ	JECTION												
	$\bigoplus \leftarrow$							REV.						
DO NOT	SCALE D	RAWING	SCALE 1:1 SHEET 1 OF 1			1								

1

