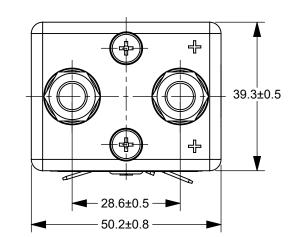

REVISIONS


 ZONE
 REV.
 DESCRIPTION
 DATE
 APPROVED


 A
 GCF#524672 INITIAL RELEASE
 OCT./25/2021
 D. ZHANG







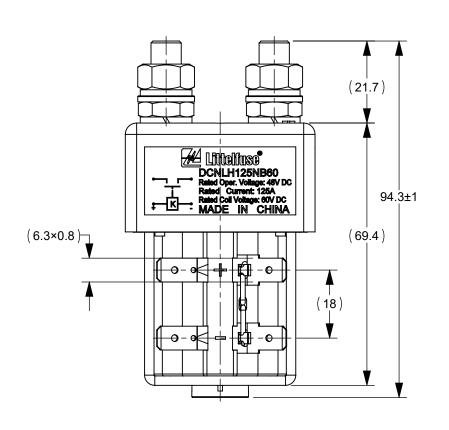

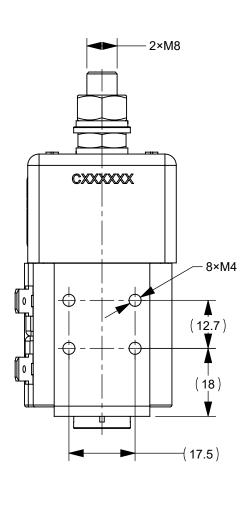

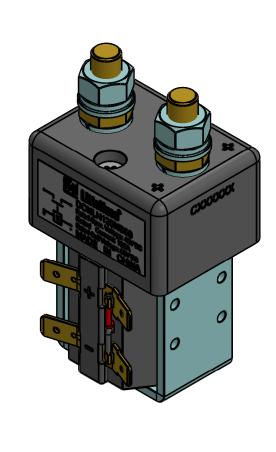


	TABLE 1: TECHNICAL PARAMETERS		
	ITEM		PARAMETER
В	MAXIMUM CONTACT VOLTAGE		60V DC
	RATED CONTACT VOLTAGE		48V DC
	RATED CONTACT CURRENT		125A
	RATED COIL VOLTAGE		60V DC
	OPERATING VOLTAGE IN COLD STATE @ (20±5)°C	PICKUP	12~45V
		RELEASE	12~45V
	OPERATING TIME IN COLD STATE @ (20±5)°C	OPERATE TIME	MAX 30ms
		RELEASE TIME	MAX 30ms
		BOUNCE TIME	MAX 5ms
	CONTACT VOLTAGE DROP		≤80mV@100 A
Α	DIELECTRIC STRENGTH		1000V AC, 50Hz,1min, LEAKAGE CURRENT ≤1 mA
	INSULATION RESISTANCE		≥50 MΩ@500VDC
	ELECTRIC LIFE		6000 CYCLES
	MECHANICAL LIFE		100,000 CYCLES
	WORKING DUTY		CONTINUOUS

8

F

NOTES:

- 1. ALL DIMENSIONS ARE REFERENCE ONLY.
- 2. PRODUCT TYPE: MAGNETIC LATCHING RELAY.
- 3. MATERIALS AND FINISH:
- 3.1 BASE: PHENOLPLASTIC, UL94V-0.
- 3.2 CONTACTS: SILVER ALLOY.
- 3.3 STUD: COPPER ROD.
- 4. CONTACT STUD: M8 STUD, RECOMMENDED TORQUE: 7N●m~10N●m.
- 5. PRODUCT TECHNICAL PARAMETERS: SEE TABLE 1.
- 6. PRODUCT COIL IS ACTIVATED BY POSITIVE AND NEGATIVE PULSE, 200ms≤t≤1s, SQUARE PULSE. LONG TIME CONTINUOUS ENERGIZING IS NOT ALLOWED. POSITIVE PULSE MAKES THE CONTACT CLOSE WHILE NEGATIVE PULSE MAKES THE CONTACT OPEN. AFTER THE ACTIVATION, THE PERMANENT MAGNET IN PRODUCT KEEPS THE STATE OF THE CONTACT.

DIMENSIONS ARE SHOWN IN MILLIMETERS. DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI/ASME Y14.5-1994. FIT/ FUNCTION CRITICAL CHARACTERISTICS SAFETY/ COMPLIANCE CRITICAL CHARACTERISTICS SYMBOL CPK DENOTES CPK DIMENSIONS MINIMUM CPK VALUE DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE.PROCEDURE FOR MEASUREMENTAND TRACKINGTO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE NAME DATE RAWN JY. SHI OCT./8/202 CHECKED J. LI OCT./15/2021 Expertise Applied Answers Delivered DCNLH 125A 48V 60V COIL FORM NO: CVP-PE40-0005 REV B CONTACTOR THIRD ANGLE PROJECTION SIZE DWG. NO.
C OUTLINE OL-DCNLH125NB60 A DO NOT SCALE DRAWING | SCALE 1:1 SHEET 1 OF 1

С

В

7 6 5 4 3 2