


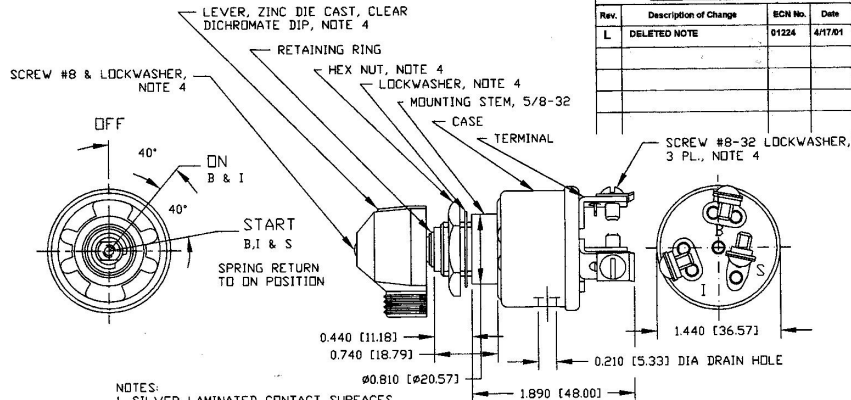

NOTES:

1. SILVER LAMINATED CONTACT SURFACES
2. MELAMINE LINER
3. ALL STEEL PARTS PLATED
4. PARTS MAY BE ASSEMBLED OR SHIPPED IN A BAG
5. RATING: START 20 AMPS @ 12V DC
IGN 25 AMPS @ 12V DC
6. APPLICABLE SAE STANDARD OR RECOMMENDED PRACTICE SAE J259
7. ALL DIMENSIONS REFERENCE ONLY

I	IGNITION
S	START
B	BATTERY
LEGEND	

Tolerances: Unless otherwise specifically noted, the following are default tolerances:
 * 2-place Decimal Dimensions $\pm 0.25^\circ$
 * 3-place Decimal Dimensions $\pm 0.05^\circ$
 * Angular Dimensions $\pm 1.0^\circ$ Dgs.
 * Metric: Refer to equivalent English Dimension Tolerance
 *** NOTE: All tolerances are Non-Cumulative. ***

Dimensional Units: All dimensions are expressed in inches except those shown in brackets (xxx) are expressed in millimeters

"REF." or an Asterisk (*) = Non-Toleranced Reference Dimension, shown for clarification purposes only.

Used On
or Ref.:

Scale: **1:1**

Drawn By: **MF**

Date: **2/8/65**

Responsible Engineer: **N/A**

Page: **1 of 1**

Revision Control Record

Rev.	Description of Change	ECN No.	Date
L	DELETED NOTE	01224	4/17/01

Key for Special Characteristics



Critical Characteristic, relating to Safety and/or Regulatory Compliance



Significant Characteristic relating to Process Control (SPC)



Control Dimension relating to Form - Fit - Function as defined by Cole Hersee Company under the Customer

Note that the identification of any Characteristics as being "Special" does not alter the requirement that ALL specified dimensions & tolerances must be met.

Cole Hersee Co.

20 Old Colony Ave., South Boston, MA, 02127
 Ptn: 617-266-2100 Web: www.colehersee.com

Description:

**SWITCH, IGNITION & START
HEAVY DUTY, 3 POSITION**

Drawing/
Part No.:

95610

Current Rev.

L