



Ø1.52
[Ø0.060]

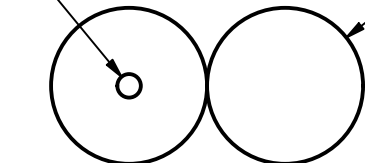

Ø10.31 ± 0.10
[Ø0.406 ± 0.004]

7.11 ± 0.51
[0.280 ± 0.020]

FULL PIN EXTENSION WHEN FUSE IS OPEN

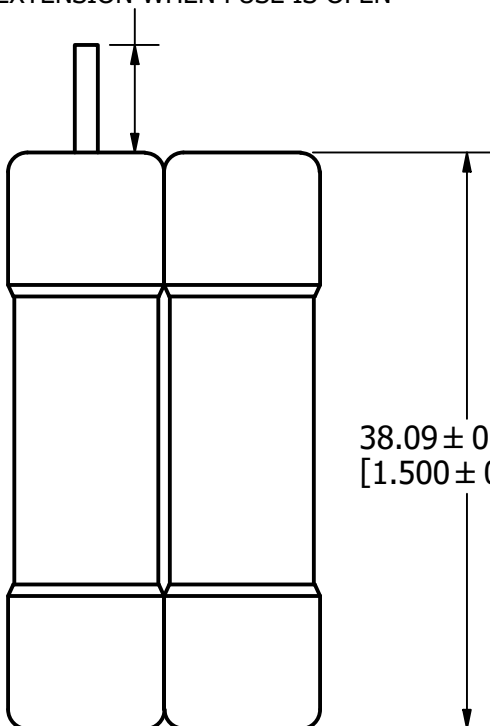

38.09 ± 0.79
[1.500 ± 0.031]

REVISION		
REV	DATE	DESCRIPTION
A	6/28/22	525364GCP - RELEASE MRY

APPROXIMATE SHIPPING WEIGHT: 5 FUSES / .12 LB.

1	NO	COMPONENT NO	DESCRIPTION	QTY/M	U/M
---	----	--------------	-------------	-------	-----

BILL OF MATERIAL

<S>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE
●	DENOTES CRITICAL CHARACTERISTICS.
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE
⊠	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.

A


MATL SPEC	FINISH
-----------	--------

DRW Jeff Moler	DATE 6/17/2022	SCALE NTS	FINISH GOOD WT GRAMS/PIECE
-------------------	-------------------	--------------	-------------------------------

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994

3RD ANGLE PROJECTION	
----------------------	--

TITLE FLA 12-30A OUTLINE

 <p>Littelfuse[®] CHICAGO, ILLINOIS 60631</p>	REVISION	DRWG NO.	SHEET 1 OF 1
	A	OL-0FLA030	