
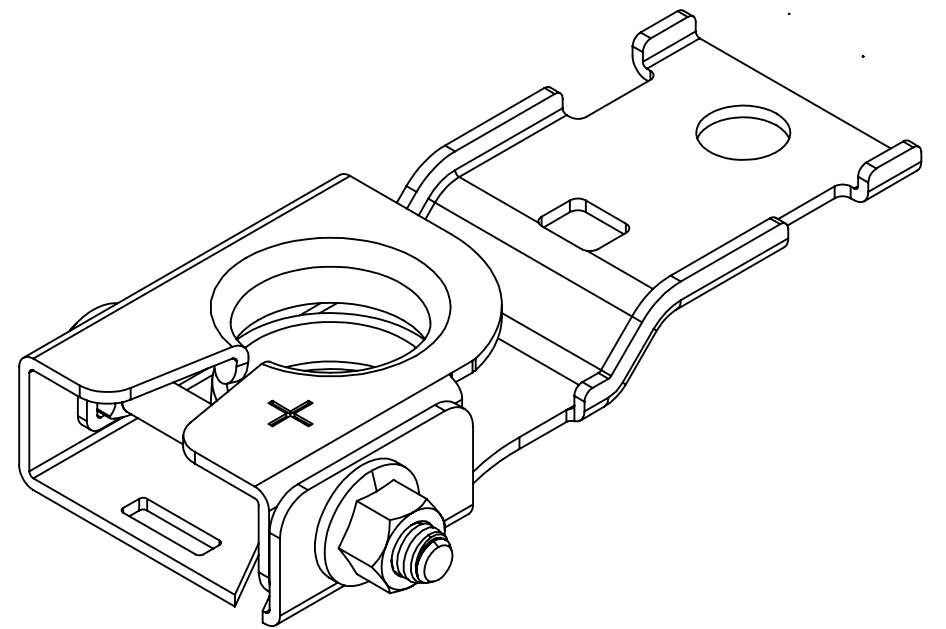
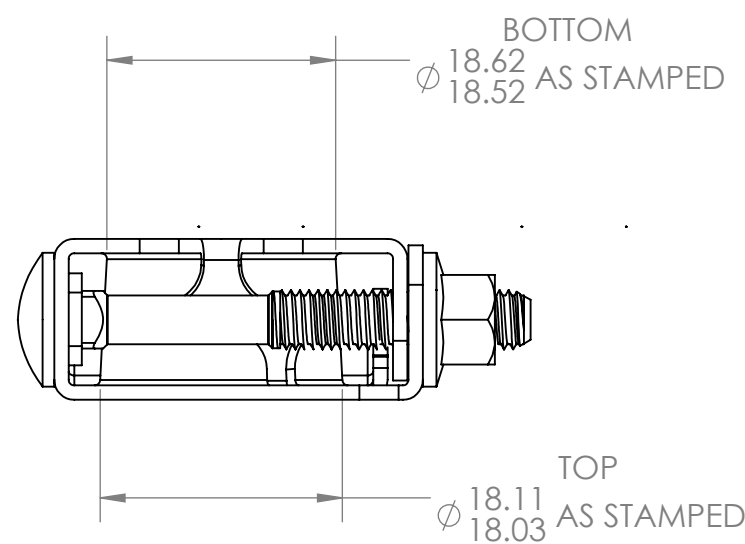
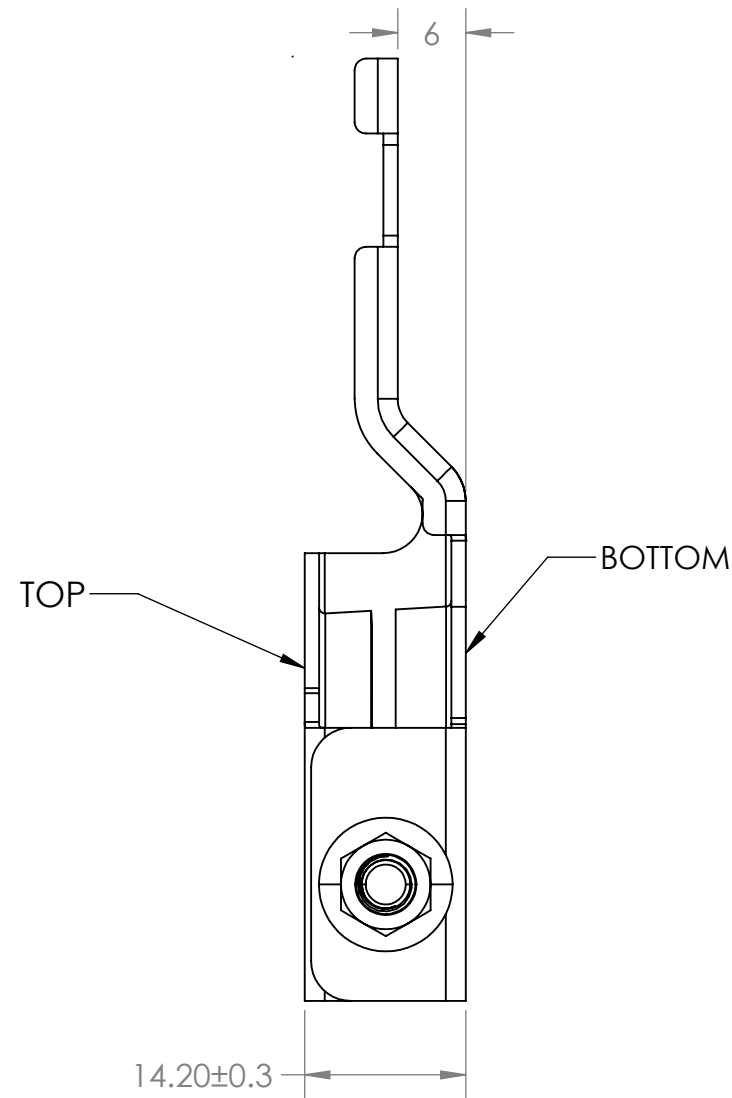


NOTE:

1. DYNAMIC TORQUE AT VEHICLE ASSEMBLY PLANT: 5.4Nm±0.9Nm @ 540 RPM MAX

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	PER EC#514693: INITIAL RELEASE	6/22/2015	J. LIU

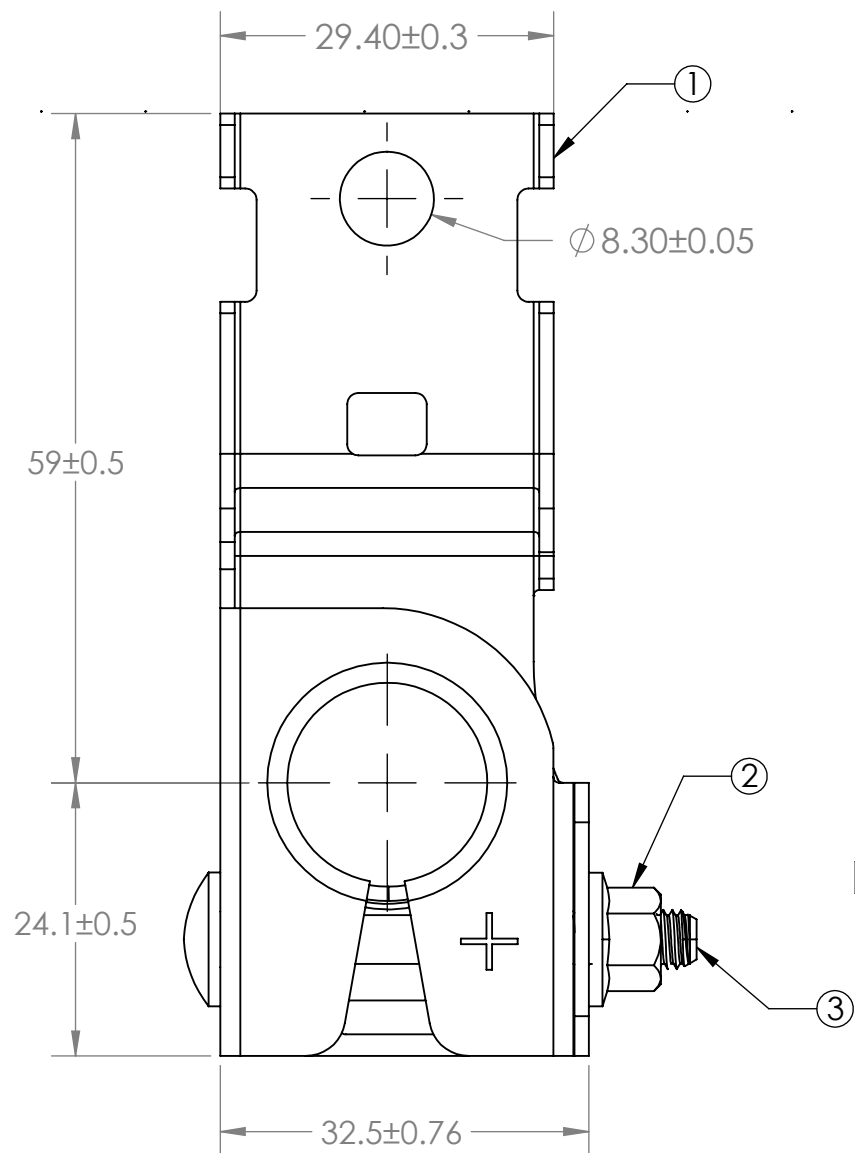

BOM			
ITEM	DESCRIPTION	MATERIAL	QTY
1	BATTERY TERMINAL	ALLOY C194, TIN PLATED WITH MINIMUM THICKNESS OF 0.001	1
2	M6 CARRAGE BOLT		1
3	M6 FLANGE NUT		1

DIMENSIONS ARE IN MM.		DRAWN		NAME		DATE			
		J. Liu				6/22/2015		Inquiries: 800-445-4600 Inquiries: 800-445-4600	
DIMENSIONS AND TOLERANCES ARE DEFINED ACCORDING TO ANSI / ASME Y14.5M-1994		CHECKED		-		-		805 W ORCHARD DR., STE 6, BELLINGHAM, WA 98226	
		-		-		-		Phone (360)738-9010 Fax (360)738-0372	
		-		-		-			
		-		-		-			
THIS DRAWING AND THE INFORMATION CONTAINED WITHIN IT ARE CONFIDENTIAL AND MAY NOT BE COPIED OR DISCLOSED WITHOUT THE WRITTEN PERMISSION OF LITTELFUSE.									
				THIRD ANGLE PROJECTION					
									
						SIZE		DWG. NO.	
						C		876-199	
						SCALE 1.5:1		REV. A	
								SHEET 1 OF 1	