


 REVISION

 REV
 DATE
 DESCRIPTION

 A
 6/28/22
 525364GCP - RELEASE MRY

APPROXIMATE SHIPPING WEIGHT: 5 FUSES / .12 LB. 7.11 ± 0.51

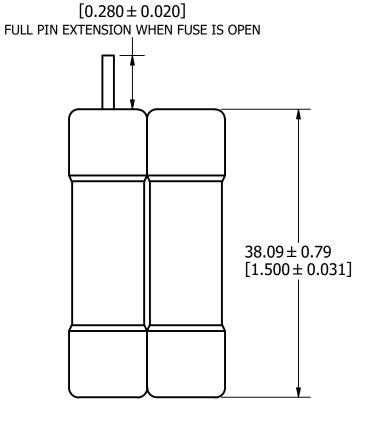

1									
NO	COMPONENT NO		DESCRIPTION			QTY/M	U/M		
BILL OF MATERIAL									
<	:S>	CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE							
•		DENOTES CRITICAL CHARACTERISTICS.							
CPK		DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE							
(ST〉	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.							
(CP DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.								
MATL SPEC				FINI	FINISH				
DRW Jeff M	loler		DATE 6/17/2022		SCALE NTS		FINISH GOOD WT GRAMS/PIECE		
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994									
3RD ANGLE PROJECTION									
FLA 12-30A OUTLINE									
Littelfuse CHICAGO, ILLINOIS 60631			REVISIO	N	DRWG NO.	SHEE	T 1 OF 1		
			Α		OL-0FLA	030			