


4

3

2

1

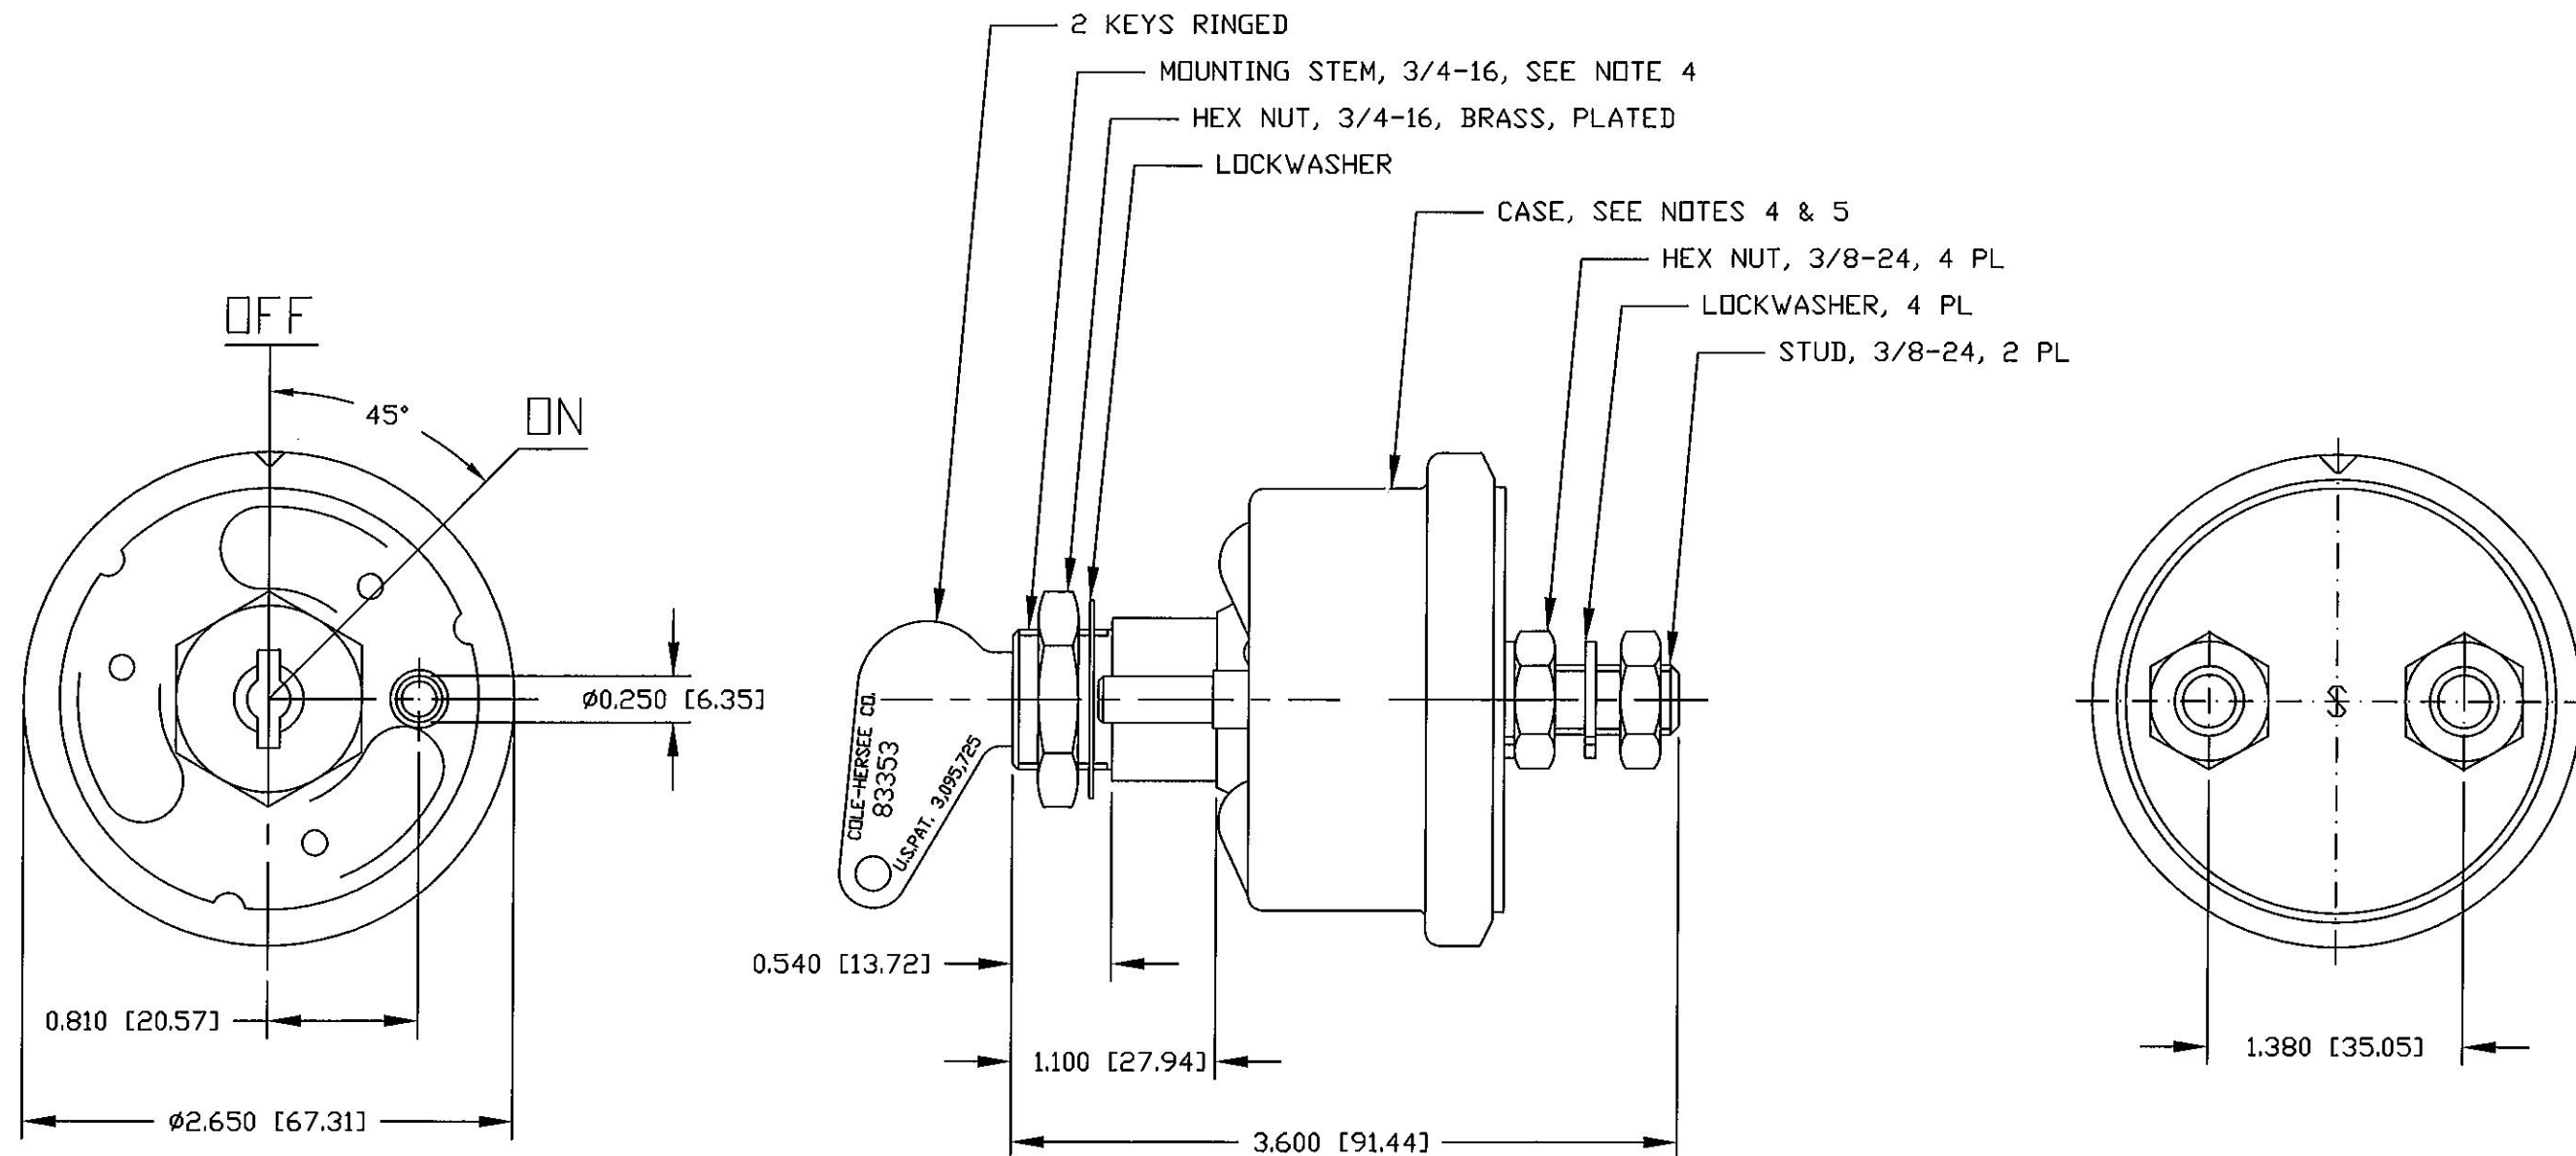

NOTES:

1. ALL STEEL PARTS PLATED
2. ALL DIMENSIONS ARE REFERENCE ONLY
3. SILVER CAD OXIDE CONTACT SURFACES
4. O-RING SEAL BETWEEN MOUNTING STEM & CASE
5. GASKET SEAL BETWEEN TERMINAL INSULATOR & CASE
6. RATING:

SWITCH MUST CARRY 1000 AMPS @ 6, 12, & 24 V DC FOR 1000 CYCLES OF 30 SECONDS ON, 5 MINUTES OFF WITHOUT SIGNIFICANT DETERIORATION OF CONTACTS

Revision Control Record				Rev.	Description of Change	ECN No.	Date	Tolerances Unless otherwise specifically noted, the following are default tolerances:			PROPRIETARY INFORMATION This Engineering Drawing, and the information contained herein, is proprietary to Cole Hersee Company and may not be disclosed, re-produced, or in any other way transferred or communicated to any other party without the express written consent of an authorized representative of Cole Hersee Company.			Special Characteristics:			 Cole Hersee Co. 20 Old Colony Ave., South Boston, MA, 02127 Phn: 617-268-2100 Web: www.colehersee.com
Rev.	Description of Change	ECN No.	Date					2-places +/- 0.02"	3-places +/- 0.005"	Angular +/- 1°	 Critical Characteristic, relating to Safety and/or Regulatory Compliance	 Significant Characteristic relating to Process Control	 Control Dimension relating to Form - Fit - Function as defined by Cole Hersee Company and/or the Customer				
H	REDRAWN; BOM CHANGE	10150	4/29/10														
								Metric: Shown in [] refers to equivalent English Dim Tol									
								"REF." or an Asterisk (*) = Non-Toleranced Reference Dimension, shown for clarification purposes only.									
								NOTE: All tolerances are Non-Cumulative.									
								FORM CHT-6 (2/07)	Used On or Ref.: 2484-A WITH WELDED CASE & KEY	Scale: 1:1	Drawn BY: RMT	Date Drawn: 12/12/79	Pg. 1 of 1				

Description:		SWITCH, MASTER DISCONNECT	Current Rev. H
Drawing / Part No.:			
		2484-19	

Description: SWITCH, MASTER DISCONNECT

Drawing / Part No.: 2484-19

Current Rev.: H