


| REVISION |         |                         |
|----------|---------|-------------------------|
| REV      | DATE    | DESCRIPTION             |
| A        | 6/15/21 | 523808GCP - RELEASE MRY |

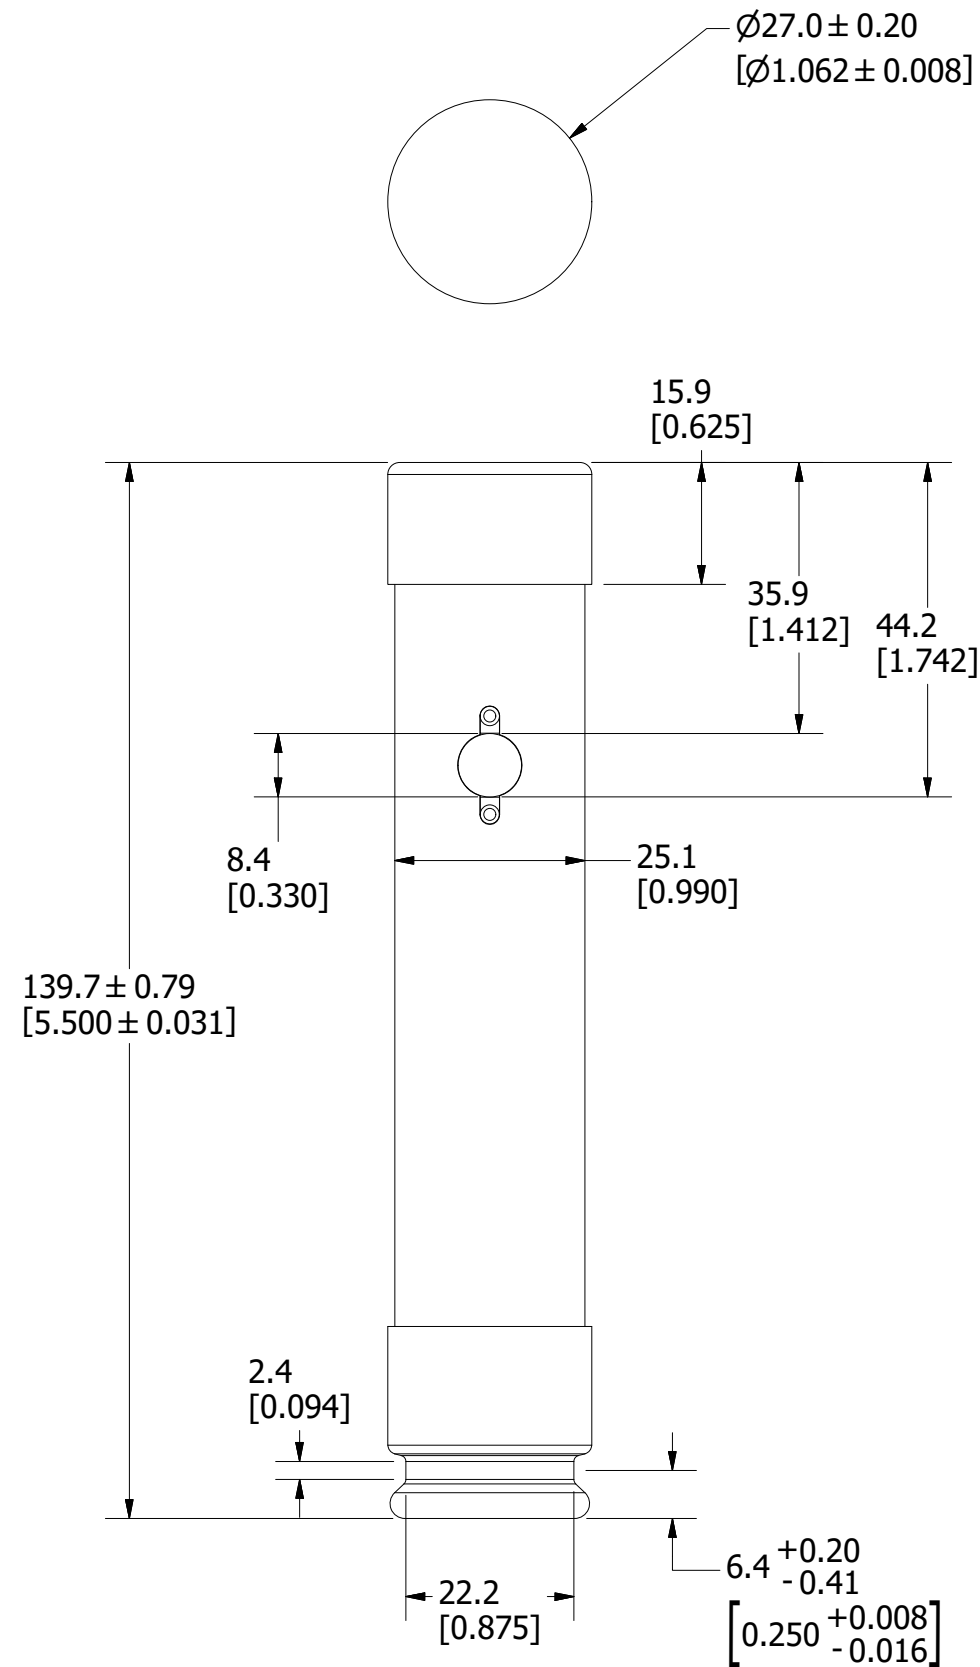

APPROXIMATE SHIPPING WEIGHT: 10 FUSES = 3.27 LB

|     |  |
|-----|--|
| <S> | CRITICAL CHARACTERISTIC FOR PART SAFETY/COMPLIANCE   |
| ●   | DENOTES CRITICAL CHARACTERISTICS.  |
| CPK | DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE   |
| ⊠   | DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS. |
| CP  | DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.               |

**B**

|              |                  |              |                               |
|--------------|------------------|--------------|-------------------------------|
| MATL SPEC    |                  | FINISH       |                               |
| DRW<br>myork | DATE<br>6/7/2021 | SCALE<br>NTS | FINISH GOOD WT<br>GRAMS/PIECE |

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [ ] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994

|                      |  |
|----------------------|--|
| 3RD ANGLE PROJECTION |  |
|----------------------|--|

|       |                     |
|-------|---------------------|
| TITLE | IDSR 35-60A OUTLINE |
|-------|---------------------|

|  |                      |                               |              |
|--|----------------------|-------------------------------|--------------|
| <b>Littelfuse</b><br>CHICAGO, ILLINOIS 60631 | REVISION<br><b>A</b> | DRWG NO.<br><b>OL-IDSR060</b> | SHEET 1 OF 1 |
|--|----------------------|-------------------------------|--------------|