IXYS

HiPerFET™ Power MOSFETs Single Die MOSFET

IXFN 44N60

V_{DSS} = 600 V
I_{D25} = 44 A
$R_{DS(on)}$ = 130 mΩ

$t_{rr} \leq$ 250 ns

N-Channel Enhancement Mode
Avalanche Rated, High dv/dt, Low t_{rr}



Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	600	V
V_{DGR}	T_J = 25°C to 150°C; R_{GS} = 1 MΩ	600	V
V_{GS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	44	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	176	A
I_{AR}	T_C = 25°C	44	A
E_{AR}	T_C = 25°C	60	mJ
E_{AS}	T_C = 25°C	3	J
dv/dt	$I_S \leq I_{DM}$, di/dt ≤ 100 A/μs, $V_{DD} \leq V_{DSS}$, $T_J \leq$ 150°C, R_G = 2 Ω	5	V/ns
P_D	T_C = 25°C	600	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_J	1.6 mm (0.63 in) from case for 10 s	-	°C
V_{ISOL}	50/60 Hz, RMS t = 1 min	2500	V~
	$I_{ISOL} \leq$ 1 mA t = 1 s	3000	V~
M_d	Mounting torque	1.5/13	Nm/lb.in.
	Terminal connection torque	1.5/13	Nm/lb.in.
Weight		30	g

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values min.	typ.	max.	
V_{DSS}	V_{GS} = 0 V, I_D = 3 mA	600			V
$V_{GH(th)}$	$V_{DS} = V_{GS}$, I_D = 8 mA	2.5		4.5	V
I_{GSS}	V_{GS} = ±20 V_{DC}, V_{DS} = 0			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$ T_J = 25°C			100	μA
	V_{GS} = 0 V T_J = 125°C			2	mA
$R_{DS(on)}$	V_{GS} = 10 V, $I_D = 0.5 \bullet I_{D25}$ Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %			130	mΩ

miniBLOC, SOT-227 B
E153432



G = Gate D = Drain
S = Source TAB = Drain

Either Source terminal at miniBLOC can be used as Main or Kelvin Source

Features

- International standard package
- miniBLOC, with Aluminium nitride isolation
- Low $R_{DS(on)}$ HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
- Fast intrinsic Rectifier

Applications

- DC-DC converters
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- Temperature and lighting controls

Advantages

- Easy to mount
- Space savings
- High power density

IXYS reserves the right to change limits, test conditions, and dimensions.

© 2000 IXYS All rights reserved

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	min.	typ.	max.	
g_{fs}	V_{DS} = 10 V; I_D = 0.5 • I_{D25}, pulse test	30	45		S
C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		8900		pF
C_{oss}			1000		pF
C_{rss}			330		pF
$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25} R_G = 1 Ω (External),		42		ns
t_r			55		ns
$t_{d(off)}$			110		ns
t_f			45		ns
$Q_{g(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		330		nC
Q_{gs}			60		nC
Q_{gd}			65		nC
R_{thJC}				0.21	K/W
R_{thCK}			0.05		K/W

miniBLOC, SOT-227 B



M4 screws (4x) supplied

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	38.00	38.23	1.496	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	1.98	2.13	0.078	0.084
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	-0.05	0.1	-0.002	0.004

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	min.	typ.	max.	
I_S	V_{GS} = 0 V			44	A
I_{SM}	Repetitive; pulse width limited by T_{JM}			176	A
V_{SD}	I_F = I_S, V_{GS} = 0 V, Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %			1.3	V
t_{rr}	I_F = 50A, -di/dt = 100 A/µs, V_R = 100 V			250	ns
Q_{RM}			1.4		µC
I_{RM}			8		A

© 2000 IXYS All rights reserved

IXYS MOSFETS and IGBTs are covered by one or more of the following U.S. patents:
4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715
4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025

Figure 1. Output Characteristics at 25°C

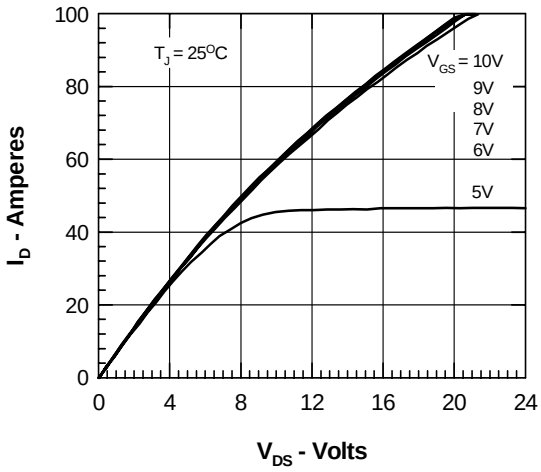

Figure 2. Output Characteristics at 125°C

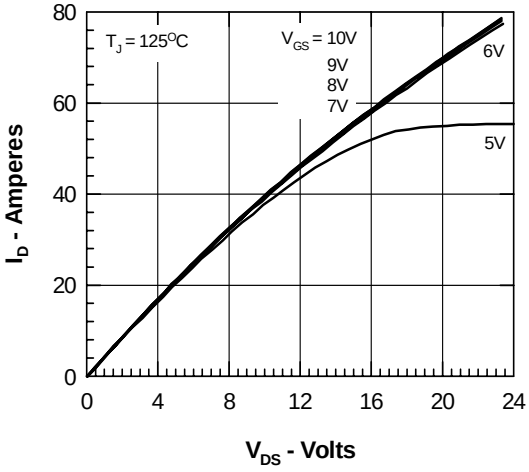

Figure 3. $R_{DS(on)}$ normalized to 15A/25°C vs. I_D

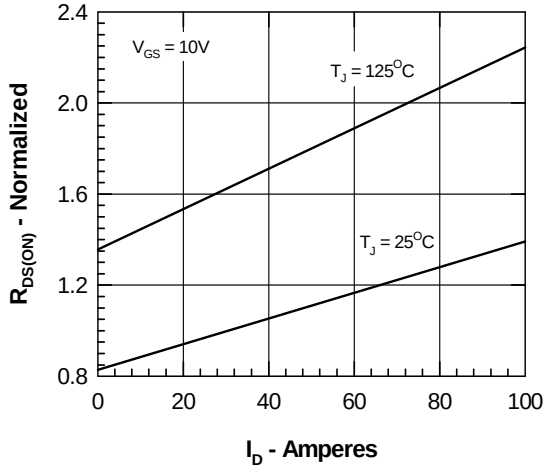

Figure 4. $R_{DS(on)}$ normalized to 15A/25°C vs. T_J

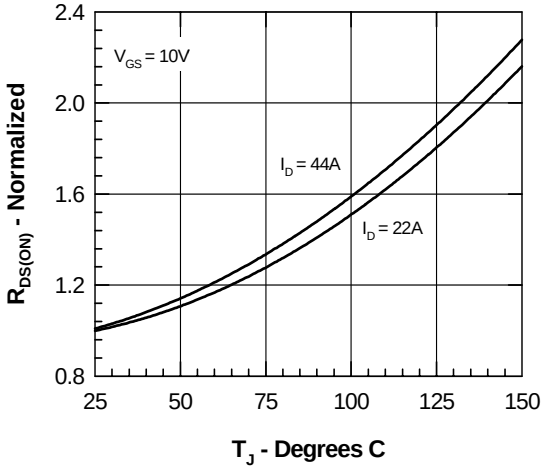

Figure 5. Drain Current vs. Case Temperature

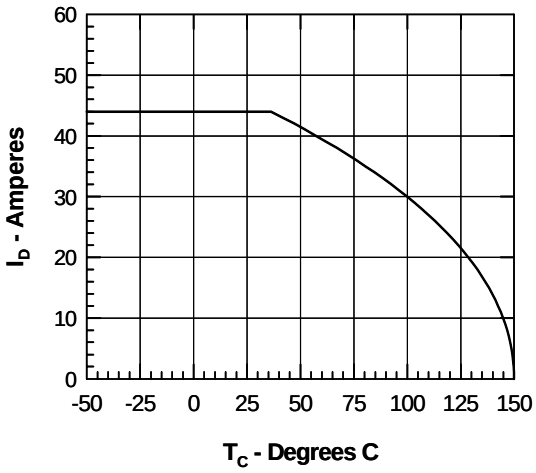

Figure 6. Admittance Curves

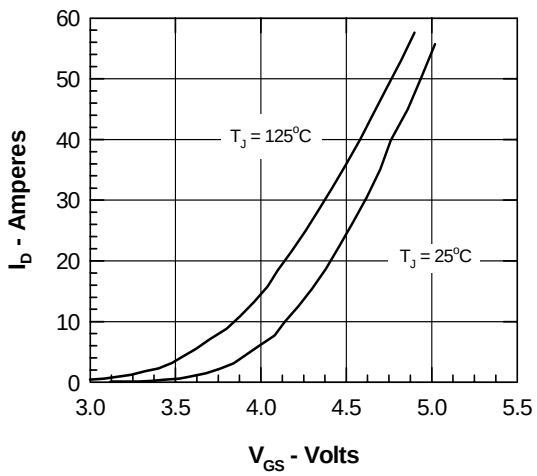

© 2000 IXYS All rights reserved

Figure 7. Gate Charge

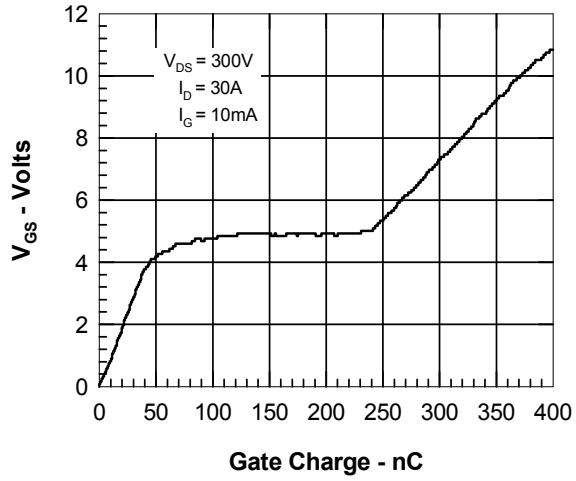

Figure 8. Capacitance Curves

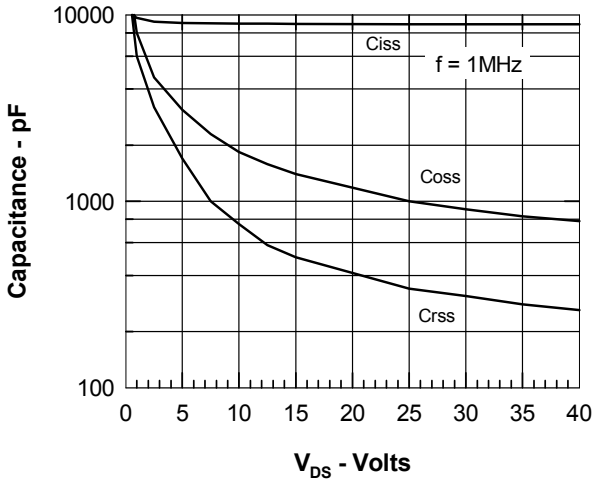

Figure 9. Forward Voltage Drop of the Intrinsic Diode

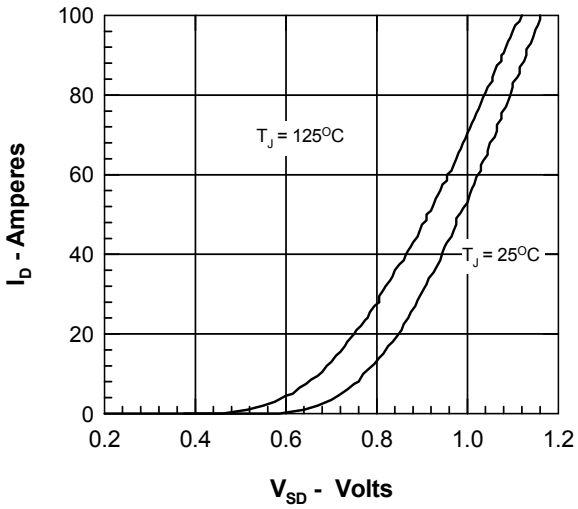

Figure 10. Transient Thermal Resistance

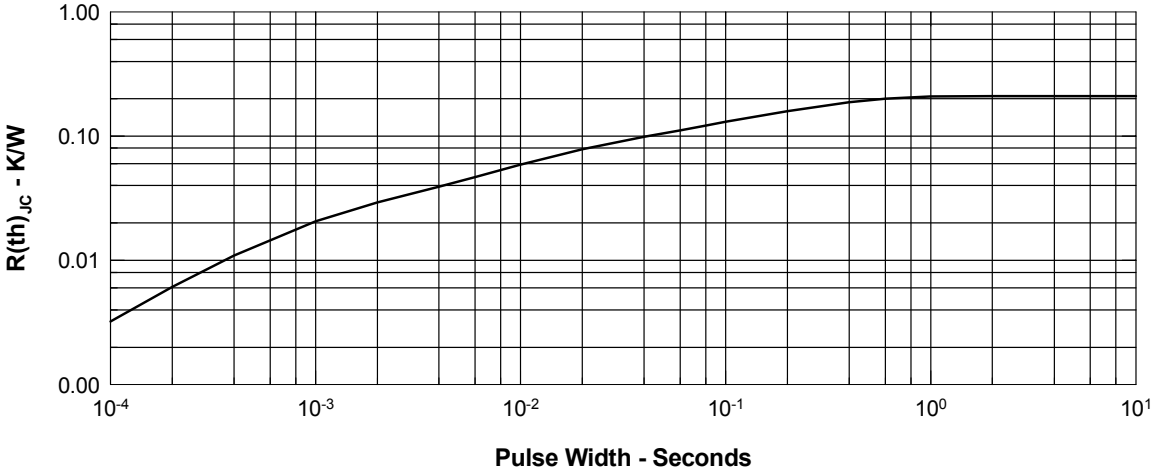

© 2000 IXYS All rights reserved

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.