XPT™ 600V IGBTs GenX3™

IXXA50N60B3
IXXP50N60B3
IXXH50N60B3

V_{CES} = 600V
I_{C110} = 50A
$V_{CE(sat)}$ ≤ 1.80V

Extreme Light Punch Through
IGBT for 5-30 kHz Switching



TO-263 (IXXA)



TO-220 (IXXP)



TO-247 (IXXH)



G = Gate C = Collector
E = Emitter Tab = Collector

Symbol	Test Conditions	Maximum Ratings	
V_{CES}	T_J = 25°C to 175°C	600	V
V_{CGR}	T_J = 25°C to 175°C, R_{GE} = 1MΩ	600	V
V_{GES}	Continuous	±20	V
V_{GEM}	Transient	±30	V
I_{C25}	T_C = 25°C	120	A
I_{C110}	T_C = 110°C	50	A
I_{CM}	T_C = 25°C, 1ms	200	A
I_A	T_C = 25°C	25	A
E_{AS}	T_C = 25°C	200	mJ
SSOA (RBSOA)	V_{GE} = 15V, T_{VJ} = 150°C, R_G = 5Ω Clamped Inductive Load	I_{CM} = 100 @$V_{CE} \leq V_{CES}$	A
t_{sc} (SCSOA)	V_{GE}= 15V, V_{CE} = 360V, T_J = 150°C R_G = 22Ω, Non Repetitive	10	μs
P_C	T_C = 25°C	600	W
T_J		-55 ... +175	°C
T_{JM}		175	°C
T_{stg}		-55 ... +175	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
F_C	Mounting Force (TO-263)	10..65 / 2.2..14.6	N/lb.
M_d	Mounting Torque (TO-220 & TO-247)	1.13 / 10	Nm/lb.in.
Weight	TO-263	2.5	g
	TO-220	3.0	g
	TO-247	6.0	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{CES}	I_C = 250μA, V_{GE} = 0V	600			V
$V_{GE(th)}$	I_C = 250μA, V_{CE} = V_{GE}	3.5		6.0	V
I_{CES}	V_{CE} = V_{CES}, V_{GE} = 0V			25	μA
	T_J = 150°C			2	mA
I_{GES}	V_{CE} = 0V, V_{GE} = ±20V			±100	nA
$V_{CE(sat)}$	I_C = 36A, V_{GE} = 15V, Note 1		1.55	1.80	V
	T_J = 150°C		1.80		V

Features

- Optimized for 5-30kHz Switching
- Square RBSOA
- Avalanche Capability
- Short Circuit Capability
- International Standard Packages

Advantages

- High Power Density
- 175°C Rated
- Extremely Rugged
- Low Gate Drive Requirement
- Easy to Parallel

Applications

- Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts

© 2013 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	I_C = 36A, V_{CE} = 10V, Note 1	12	19		S
C_{ies}	V_{CE} = 25V, V_{GE} = 0V, f = 1MHz		2230		pF
C_{oes}			195		pF
C_{res}			44		pF
$Q_{g(on)}$	I_C = 36A, V_{GE} = 15V, V_{CE} = 0.5 • V_{CES}		70		nC
Q_{ge}			16		nC
Q_{gc}			29		nC
$t_{d(on)}$	**Inductive load, T_J = 25°C**		27		ns
t_{ri}	I_C = 36A, V_{GE} = 15V		40		ns
E_{on}	V_{CE} = 360V, R_G = 5Ω		0.67		mJ
$t_{d(off)}$	Note 2		100	150	ns
t_{fi}			135		ns
E_{off}			0.74	1.20	mJ
$t_{d(on)}$	**Inductive load, T_J = 150°C**		30		ns
t_{ri}	I_C = 36A, V_{GE} = 15V		45		ns
E_{on}	V_{CE} = 360V, R_G = 5Ω		1.40		mJ
$t_{d(off)}$	Note 2		130		ns
t_{fi}			190		ns
E_{off}			1.20		mJ
R_{thJC}				0.25	°C/W
R_{thCS}	TO-247		0.21		°C/W
	TO-220		0.50		°C/W

Notes:

1. Pulse test, t ≤ 300µs, duty cycle, d ≤ 2%.
2. Switching times & energy losses may increase for higher V_{CE}(clamp), T_J or R_G.

TO-220 Outline

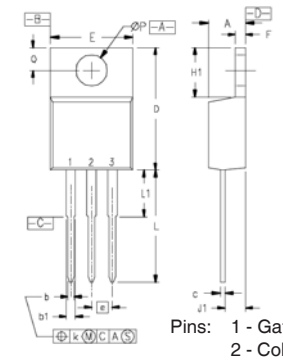

Pins: 1 - Gate
2 - Collector
3 - Emitter

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.170	.190	4.32	4.83
b	.025	.040	0.64	1.02
b1	.045	.065	1.15	1.65
c	.014	.022	0.35	0.56
D	.580	.630	14.73	16.00
E	.390	.420	9.91	10.66
e	.100 BSC		2.54 BSC	
F	.045	.055	1.14	1.40
H1	.230	.270	5.85	6.85
J1	.090	.110	2.29	2.79
k	0	.015	0	0.38
L	.500	.550	12.70	13.97
L1	.110	.230	2.79	5.84
ØP	.139	.161	3.53	4.08
Q	.100	.125	2.54	3.18

TO-247 Outline

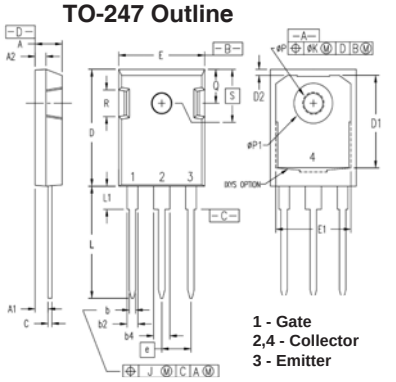

1 - Gate
2,4 - Collector
3 - Emitter

Dim.	Millimeter min	Millimeter max	Inches min	Inches max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.845
D1	13.07	-	0.515	-
D2	0.51	1.35	0.020	0.053
E	15.48	16.24	0.610	0.640
E1	13.45	-	0.53	-
E2	4.31	5.48	0.170	0.216
e	5.45 BSC		0.215 BSC	
L	19.80	20.30	0.078	0.800
L1	-	4.49	-	0.177
Ø P	3.55	3.65	0.140	0.144
Ø P1	-	7.39	-	0.290
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	

TO-263 Outline

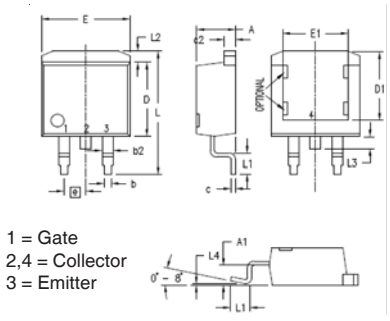

1 = Gate
2,4 = Collector
3 = Emitter

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.160	.190	4.06	4.83
A1	.080	.110	2.03	2.79
b	.020	.039	0.51	0.99
b2	.045	.055	1.14	1.40
c	.016	.029	0.40	0.74
c2	.045	.055	1.14	1.40
D	.340	.380	8.64	9.65
D1	.315	.350	8.00	8.89
E	.380	.410	9.65	10.41
E1	.245	.320	6.22	8.13
e	.100 BSC		2.54 BSC	
L	.575	.625	14.61	15.88
L1	.090	.110	2.29	2.79
L2	.040	.055	1.02	1.40
L3	.050	.070	1.27	1.78
L4	0	.005	0	0.13

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,860,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

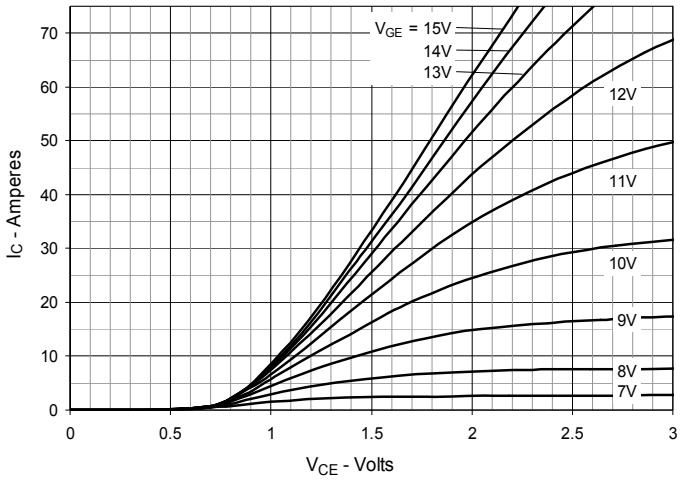

Fig. 2. Extended Output Characteristics @ T_J = 25ºC

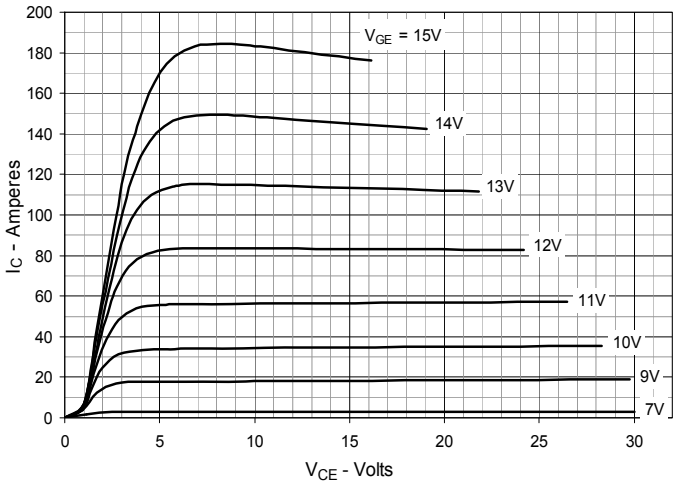

Fig. 3. Output Characteristics @ T_J = 150ºC

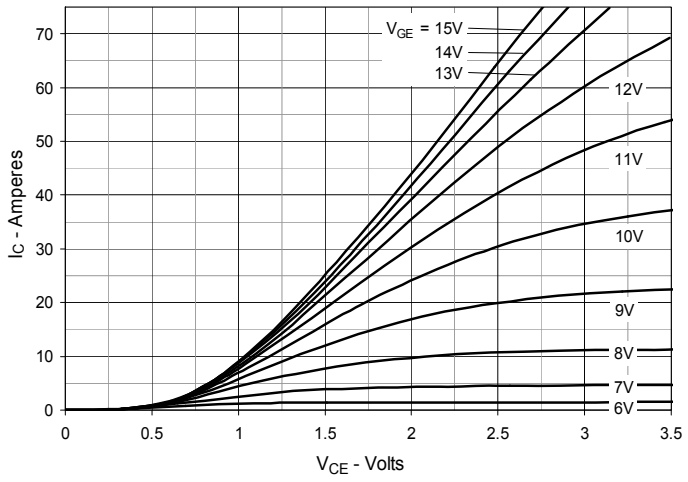

Fig. 4. Dependence of $V_{CE(sat)}$ on Junction Temperature

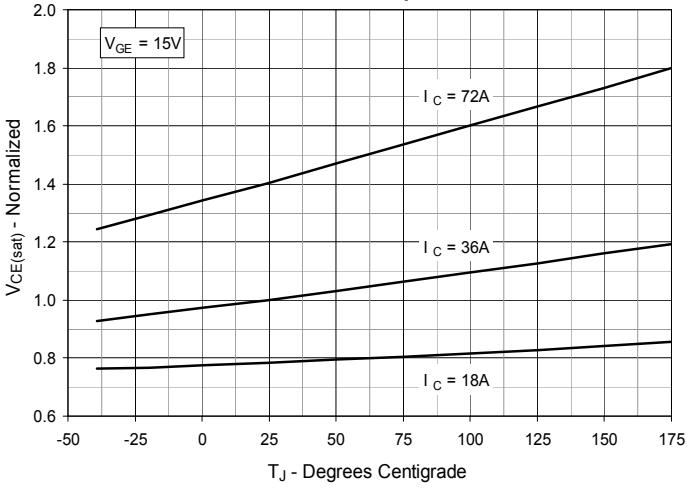

Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage

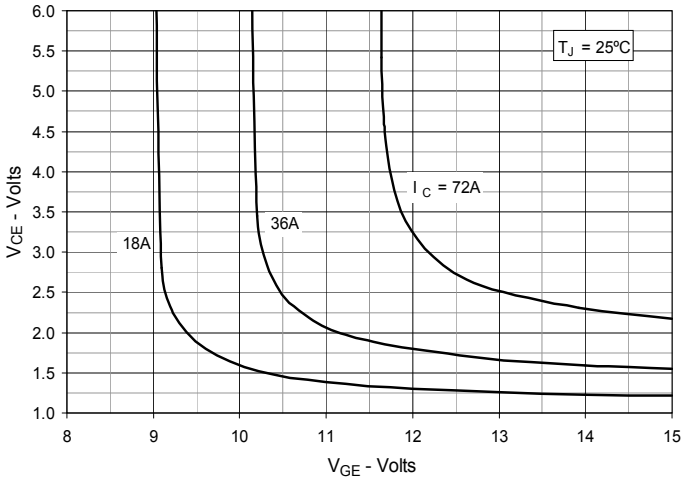

Fig. 6. Input Admittance

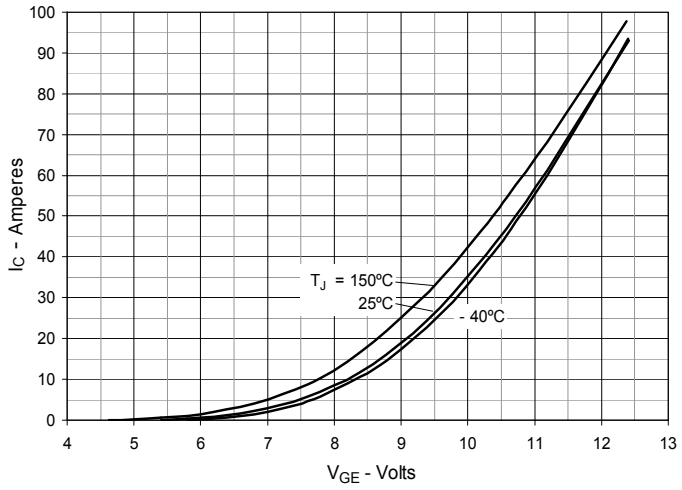

© 2013 IXYS CORPORATION, All Rights Reserved

Fig. 7. Transconductance

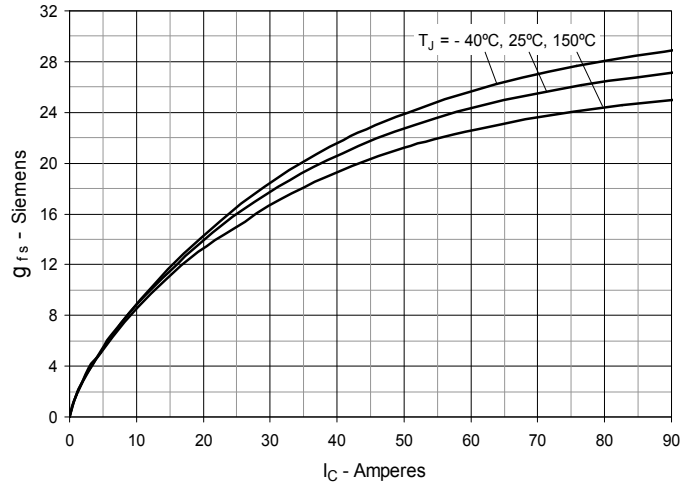

Fig. 8. Gate Charge

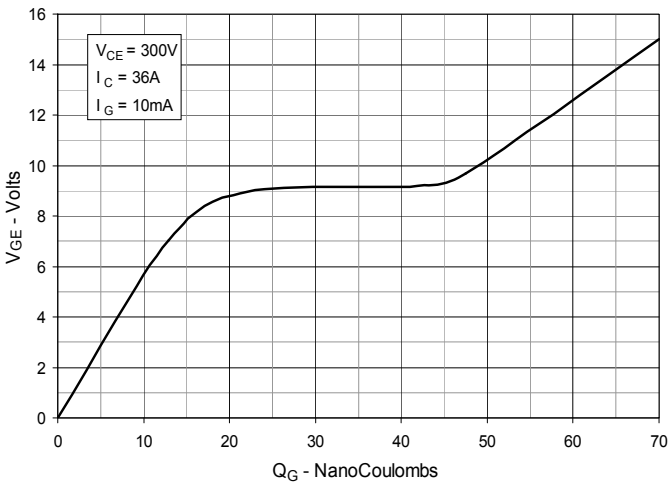

Fig. 9. Capacitance

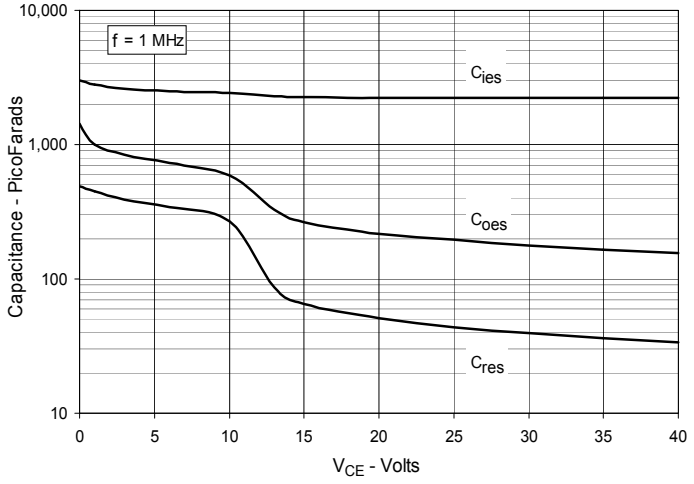

Fig. 10. Reverse-Bias Safe Operating Area

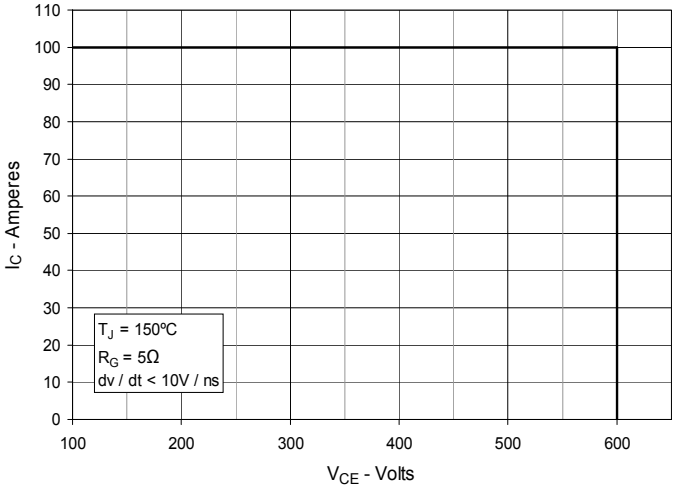

Fig. 11. Forward-Bias Safe Operating Area

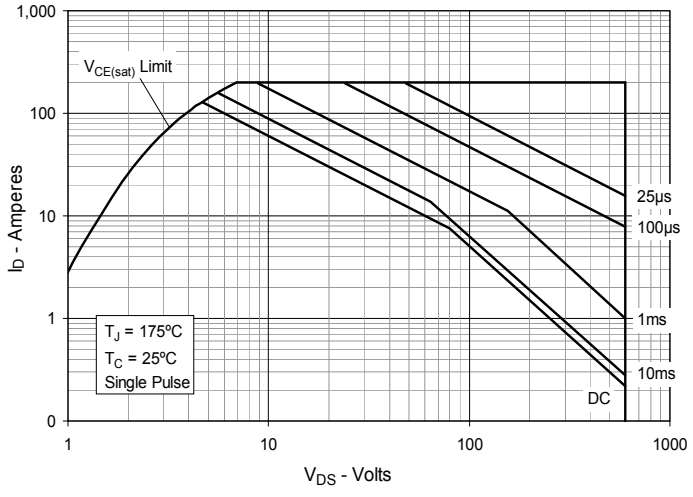

Fig. 12. Maximum Transient Thermal Impedance

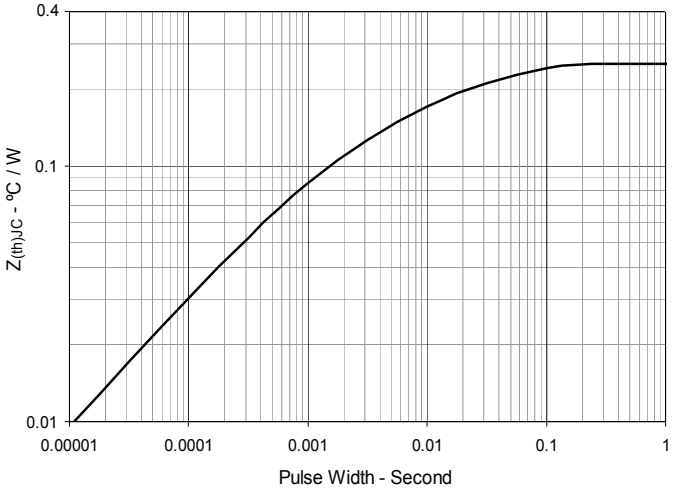

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 13. Inductive Switching Energy Loss vs. Gate Resistance

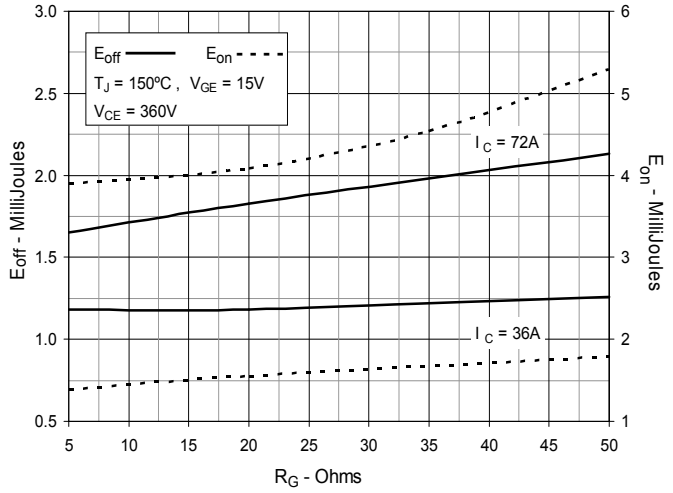

Fig. 14. Inductive Switching Energy Loss vs. Collector Current

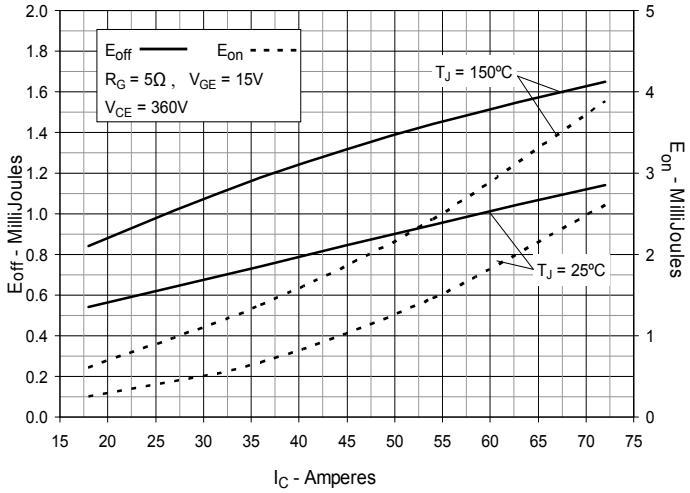

Fig. 15. Inductive Switching Energy Loss vs. Junction Temperature

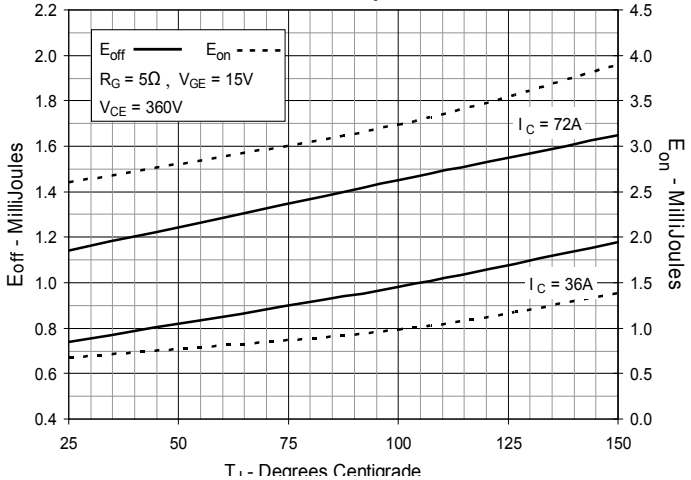

Fig. 16. Inductive Turn-off Switching Times vs. Gate Resistance

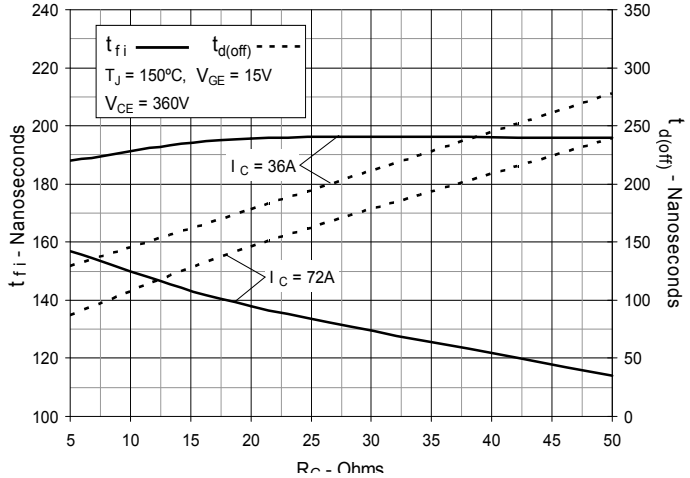

Fig. 17. Inductive Turn-off Switching Times vs. Collector Current

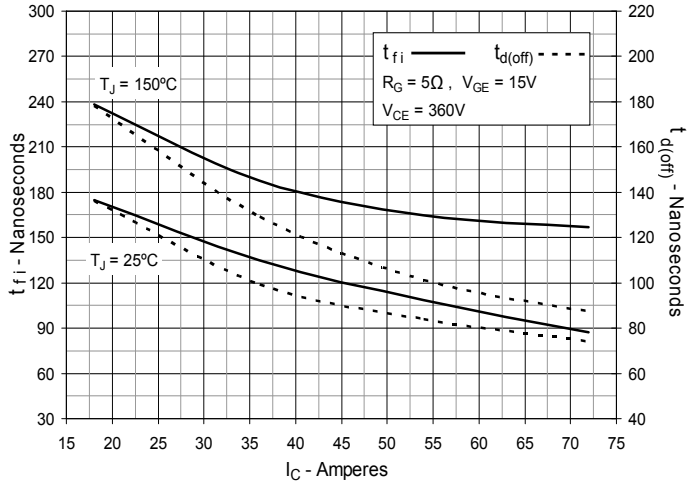

Fig. 18. Inductive Turn-off Switching Times vs. Junction Temperature

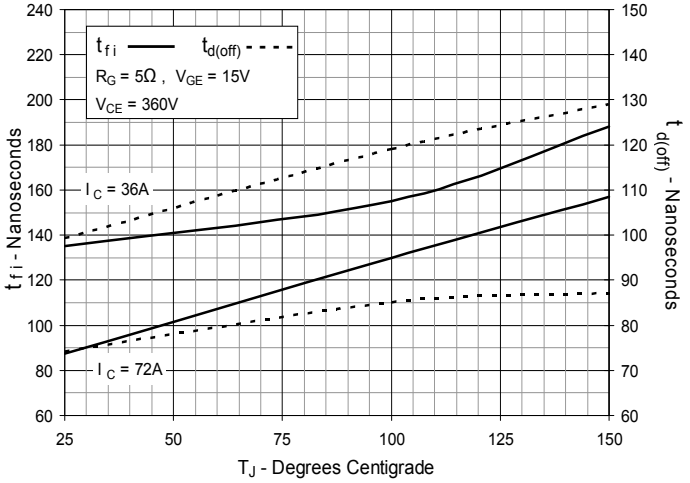

© 2013 IXYS CORPORATION, All Rights Reserved

Fig. 19. Inductive Turn-on Switching Times vs. Gate Resistance

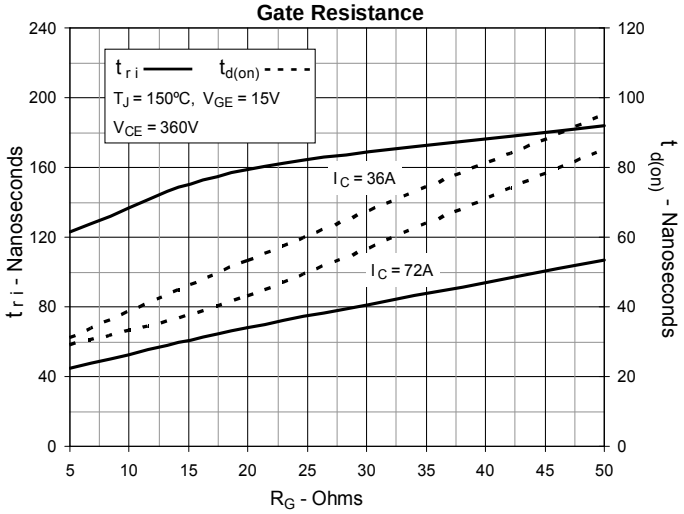

Fig. 20. Inductive Turn-on Switching Times vs. Collector Current

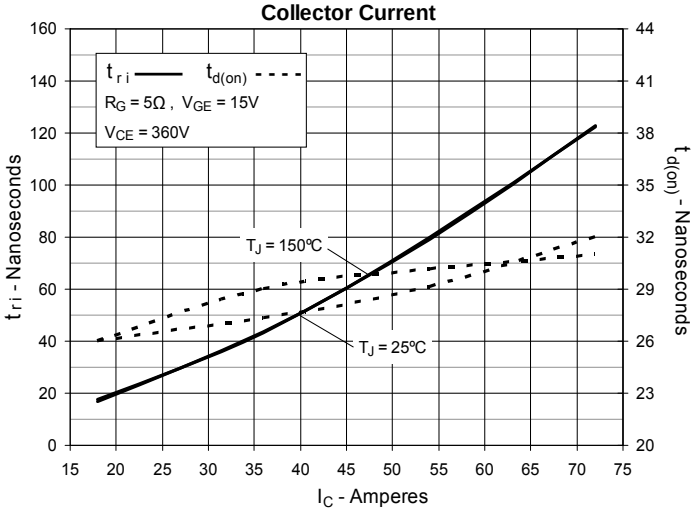

Fig. 21. Inductive Turn-on Switching Times vs. Junction Temperature

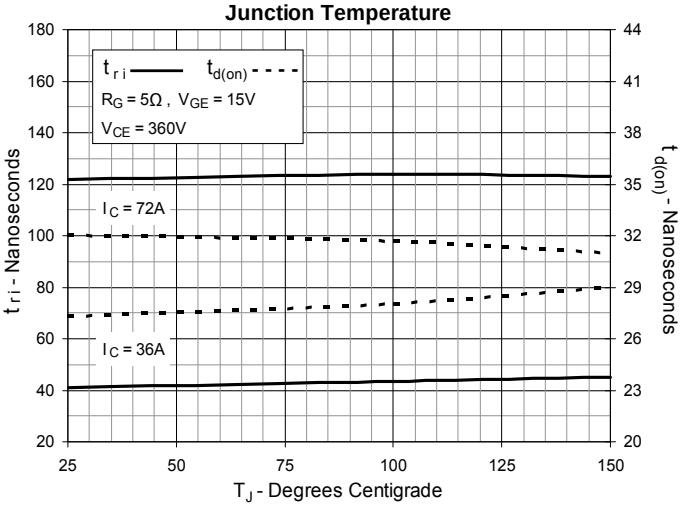

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.