

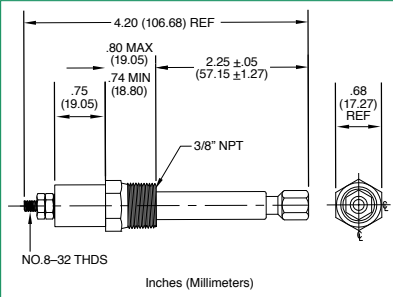


LIQUID LEVEL PROBES & PROBE HOLDERS

LIQUID LEVEL CONTROL ELECTRODES		
Product	Features	Accessory For
<p>LLP-24 Liquid Level Probe</p> 	<p>Threaded stainless steel probe measuring 24 in. (61 cm) long. Designed for use with PHST-38QTN liquid level control electrodes.</p>	<p>PHST-38QTN</p>
<p>PHST-38QTN Probe Holder</p> <p>P0700-409 Protective Boot</p> 	<p>Designed for use with all conductive liquid level controls. Composed of insulators and metal parts made of number 300 series stainless steel. These internally conductive probe holders are designed for a maximum steam pressure of 240 PSI; 400° F maximum. Maximum voltage from electrode to ground. PHST-38QTN is UL 353 Recognized.</p>	<p>Series: LLC1 LLC2 LLC4 LLC5 LLC6 LLC8 PC-XXX-LLC-CZ PC-XXX-LLC-GM 460-15-100-LLS</p>
 <p>Technical drawing of the PHST-38QTN Probe Holder showing dimensions in inches and millimeters. The drawing includes a side view and a cross-sectional view. Key dimensions are: total length 4.20 (106.68) REF; distance from end to internal thread 2.25 ± .05 (57.15 ± 1.27); internal thread diameter .75 (19.05); internal thread length .74 MIN (18.80); internal thread diameter .80 MAX (19.05); distance from end to internal thread .75 (19.05); and cross-sectional diameter .68 (17.27) REF. The drawing also indicates 'NO. 8-32 THDS' and '3/8" NPT'.</p>		