IXYS

HiPerFET™ Power MOSFETs Q-Class

IXFK 26N60Q
IXFX 26N60Q

V_{DSS} = 600 V
I_{D25} = 26 A
$R_{DS(on)}$ = 0.25 Ω

$t_{rr} \leq 250$ ns

N-Channel Enhancement Mode
Avalanche Rated, High dv/dt, Low Q_g

Preliminary Data



Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	600	V
V_{DGR}	T_J = 25°C to 150°C; R_{GS} = 1 MΩ	600	V
V_{GS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	26	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	104	A
I_{AR}	T_C = 25°C	26	A
E_{AR}	T_C = 25°C	45	mJ
E_{AS}	T_C = 25°C	1.5	J
dv/dt	$I_S \leq I_{DM}$, di/dt ≤ 100 A/µs, $V_{DD} \leq V_{DSS}$, $T_J \leq 150$°C, R_G = 2 Ω	5	V/ns
P_D	T_C = 25°C	360	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	1.6 mm (0.063 in) from case for 10 s	300	°C
M_d	Mounting torque TO-264	0.9/6	Nm/lb.in.
Weight	PLUS-247	6	g
	TO-264	10	g

PLUS 247™ (IXFX)



TO-264 AA (IXFK)



G = Gate D = Drain
S = Source TAB = Drain

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
V_{DSS}	V_{GS} = 0 V, I_D = 250µA	600			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 4 mA	2.5		4.5	V
I_{GSS}	V_{GS} = ±20 V_{DC}, V_{DS} = 0			±200	nA
I_{DSS}	$V_{DS} = V_{DSS}$, T_J = 25°C			25	µA
	V_{GS} = 0 V, T_J = 125°C			1	mA
$R_{DS(on)}$	V_{GS} = 10 V, $I_D = 0.5 \bullet I_{D25}$ Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %			0.25	Ω

Features

- Low gate charge
- International standard packages
- Epoxy meet UL 94 V-0, flammability classification
- Low $R_{DS\ (on)}$ HDMOS™ process
- Rugged polysilicon gate cell structure
- Avalanche energy and current rated
- Fast intrinsic Rectifier

Advantages

- Easy to mount
- Space savings
- High power density

© 2002 IXYS All rights reserved

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
g_{fs}	V_{DS} = 10 V; I_D = 0.5 • I_{D25}, pulse test	14	22		S
C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		5100		pF
C_{oss}			560		pF
C_{rss}			210		pF
$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25} R_G = 2.0 Ω (External),		30		ns
t_r			32		ns
$t_{d(off)}$			80		ns
t_f			16		ns
$Q_{g(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		150	200	nC
Q_{gs}			34		nC
Q_{gd}			80		nC
R_{thJC}				0.35	K/W
R_{thCK}	TO-264		0.15		K/W

Source-Drain Diode

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
I_S	V_{GS} = 0 V			26	A
I_{SM}	Repetitive; pulse width limited by T_{JM}			104	A
V_{SD}	I_F = I_S, V_{GS} = 0 V, Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %			1.5	V
t_{rr}	I_F = I_S -di/dt = 100 A/µs, V_R = 100 V			250	ns
Q_{RM}			1		µC
I_{RM}			10		A

PLUS 247™ Outline

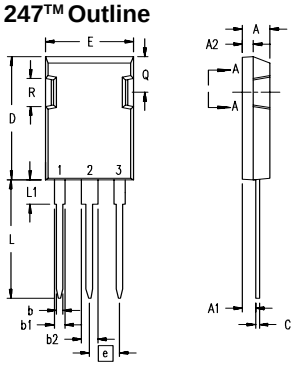

Terminals: 1 - Gate
2 - Drain (Collector)
3 - Source (Emitter)
4 - Drain (Collector)

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.83	5.21	.190	.205
A_1	2.29	2.54	.090	.100
A_2	1.91	2.16	.075	.085
b	1.14	1.40	.045	.055
b_1	1.91	2.13	.075	.084
b_2	2.92	3.12	.115	.123
C	0.61	0.80	.024	.031
D	20.80	21.34	.819	.840
E	15.75	16.13	.620	.635
e	5.45 BSC		.215 BSC	
L	19.81	20.32	.780	.800
L1	3.81	4.32	.150	.170
Q	5.59	6.20	.220	0.244
R	4.32	4.83	.170	.190

TO-264 AA Outline

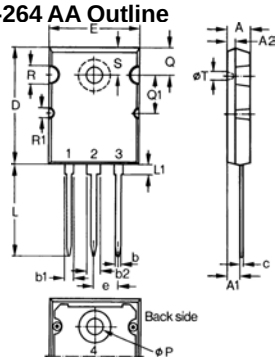

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.82	5.13	.190	.202
A1	2.54	2.89	.100	.114
A2	2.00	2.10	.079	.083
b	1.12	1.42	.044	.056
b1	2.39	2.69	.094	.106
b2	2.90	3.09	.114	.122
c	0.53	0.83	.021	.033
D	25.91	26.16	1.020	1.030
E	19.81	19.96	.780	.786
e	5.46 BSC		.215 BSC	
J	0.00	0.25	.000	.010
K	0.00	0.25	.000	.010
L	20.32	20.83	.800	.820
L1	2.29	2.59	.090	.102
P	3.17	3.66	.125	.144
Q	6.07	6.27	.239	.247
Q1	8.38	8.69	.330	.342
R	3.81	4.32	.150	.170
R1	1.78	2.29	.070	.090
S	6.04	6.30	.238	.248
T	1.57	1.83	.062	.072

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 6,306,728B1 4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.