IXYS

Advance Technical Information

High Voltage XPT™ IGBT w/ Diode

IXYF16N250CV1

V_{CES} = 2500V
I_{C110} = 14A
$V_{CE(sat)}$ ≤ 4.0V
$t_{fi(typ)}$ = 250ns



(Electrically Isolated Tab)

Symbol	Test Conditions	Maximum Ratings	
V_{CES}	T_J = 25°C to 175°C	2500	V
V_{CGR}	T_J = 25°C to 175°C, R_{GE} = 1MΩ	2500	V
V_{GES}	Continuous	±20	V
V_{GEM}	Transient	±30	V
I_{C25}	T_C = 25°C	26	A
I_{C110}	T_C = 110°C	14	A
I_{F110}	T_C = 110°C	9	A
I_{CM}	T_C = 25°C, 1ms	160	A
SSOA	V_{GE} = 15V, T_{VJ} = 150°C, R_G = 10Ω	I_{CM} = 64	A
(RBSOA)	Clamped Inductive Load	1500	V
P_C	T_C = 25°C	180	W
T_J		-55 ... +175	°C
T_{JM}		175	°C
T_{stg}		-55 ... +175	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
F_C	Mounting Force	20..120 / 4.5..27	Nm/lb.in.
V_{ISOL}	50/60Hz, 1 Minute	2500	V~
Weight		8	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{CES}	I_C = 250μA, V_{GE} = 0V	2500			V
$V_{GE(th)}$	I_C = 250μA, V_{CE} = V_{GE}	3.0		5.0	V
I_{CES}	V_{CE} = V_{CES}, V_{GE} = 0V			50	μA
	V_{CE} = 0.8 • V_{CES}, V_{GE} = 0V Note 2, T_J = 150°C			4	mA
I_{GES}	V_{CE} = 0V, V_{GE} = ±20V			±100	nA
$V_{CE(sat)}$	I_C = 16A, V_{GE} = 15V, Note 1		3.30	4.00	V
	T_J = 150°C		4.75		V

ISOPLUS i4-Pak™



1 = Gate
2 = Emitter
5 = Collector

Features

- Silicon Chip on Direct-Copper Bond (DCB) Substrate
- Isolated Mounting Surface
- 2500V~ Electrical Isolation
- High Blocking Voltage
- High Peak Current Capability
- Low Saturation Voltage

Advantages

- Low Gate Drive Requirement
- High Power Density

Applications

- Switch-Mode and Resonant-Mode Power Supplies
- Uninterruptible Power Supplies (UPS)
- Laser Generators
- Capacitor Discharge Circuits
- AC Switches

© 2017 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	I_C = 16A, V_{CE} = 10V, Note 1	11	18		S
R_{Gi}	Gate Input Resistance		5.8		Ω
C_{ies}	V_{CE} = 25V, V_{GE} = 0V, f = 1MHz		1980		pF
C_{oes}			94		pF
C_{res}			28		pF
$Q_{g(on)}$	I_C = 16A, V_{GE} = 15V, V_{CE} = 0.5 • V_{CES}		97		nC
Q_{ge}			13		nC
Q_{gc}			43		nC
$t_{d(on)}$	**Inductive load, T_J = 25°C**		14		ns
t_{ri}	I_C = 16A, V_{GE} = 15V		19		ns
E_{on}	V_{CE} = 0.5 • V_{CES}, R_G = 10Ω		4.75		mJ
$t_{d(off)}$	Note 3		260		ns
t_{fi}			250		ns
E_{off}			3.90		mJ
$t_{d(on)}$	**Inductive load, T_J = 150°C**		15		ns
t_{ri}	I_C = 16A, V_{GE} = 15V		24		ns
E_{on}	V_{CE} = 0.5 • V_{CES}, R_G = 10Ω		5.80		mJ
$t_{d(off)}$	Note 3		305		ns
t_{fi}			236		ns
E_{off}			4.40		mJ
R_{thJC}				0.83	°C/W
R_{thCS}			0.15		°C/W

ISOPLUS i4-Pak™ (HV) Outline

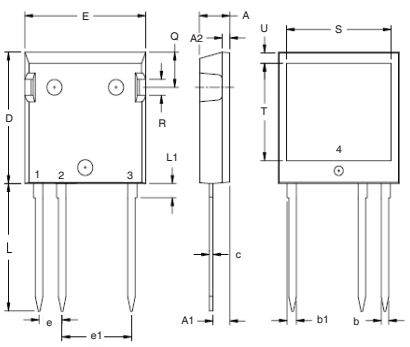

Pin 1 = Gate
Pin2 = Emitter
Pin 3 = Collector
Tab 4 = Isolated

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.190	.205	4.83	5.21
A1	.102	.118	2.59	3.00
A2	.046	.085	1.17	2.16
b	.045	.055	1.14	1.40
b1	.058	.068	1.47	1.73
C	.020	.029	0.51	0.74
D	.819	.840	20.80	21.34
E	.770	.799	19.56	20.29
e	.150 BSC		3.81 BSC	
e1	.450 BSC		11.43 BSC	
L	.780	.840	19.81	21.34
L1	.083	.102	2.11	2.59
Q	.210	.244	5.33	6.20
R	.100	.180	2.54	4.57
S	.660	.690	16.76	17.53
T	.590	.620	14.99	15.75
U	.065	.080	1.65	2.03

Reverse Diode (FRED)

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Value Min.	Typ.	Max.	
V_F	I_F = 16A, V_{GE} = 0V, Note 1			5.0	V
	T_J = 150°C		4.8		V
I_{RM}	I_F = 16A, V_{GE} = 0V, -di_F/dt = 500A/μs, V_R = 1200V, T_J = 150°C		28		A
t_{rr}			165		ns
R_{thJC}				1.5	°C/W

Notes:

1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.
2. Part must be heatsunk for high-temp Ices measurement.
3. Switching times & energy losses may increase for higher V_{CE}(Clamp), T_J or R_G.

ADVANCE TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2 4,860,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537

Fig. 1. Output Characteristics @ T_J = 25°C

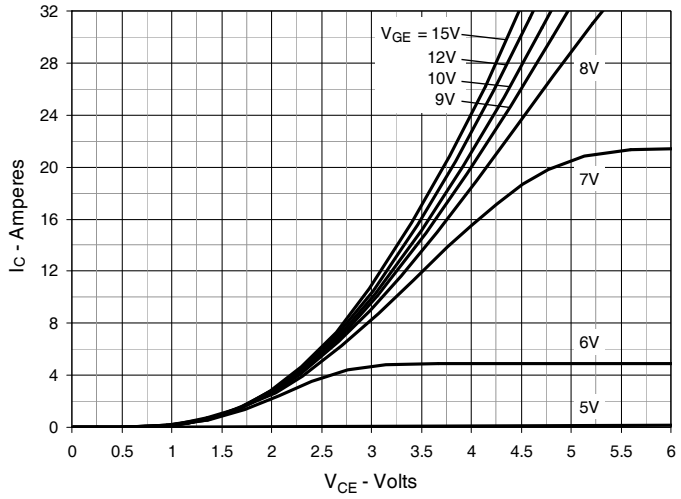

Fig. 2. Extended Output Characteristics @ T_J = 25°C

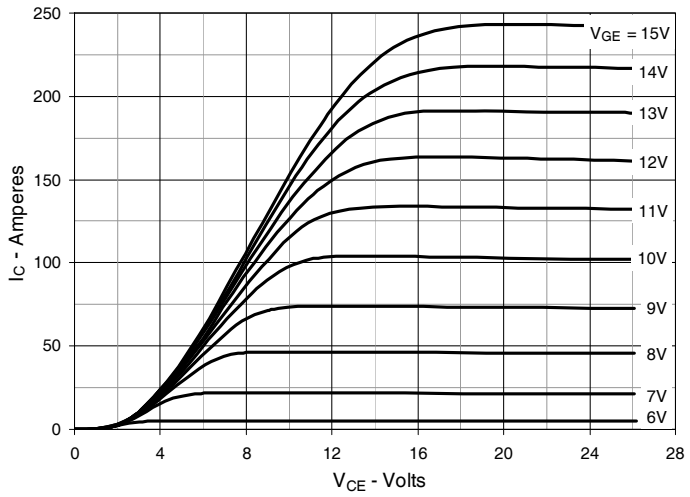

Fig. 3. Output Characteristics @ T_J = 150°C

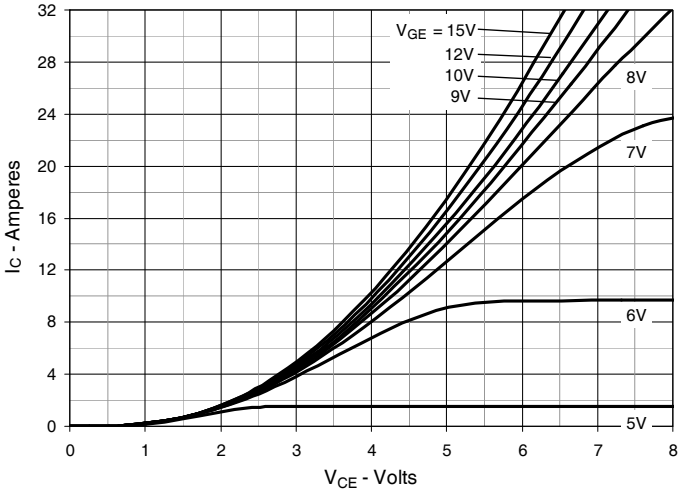

Fig. 4. Dependence of $V_{CE(sat)}$ on Junction Temperature

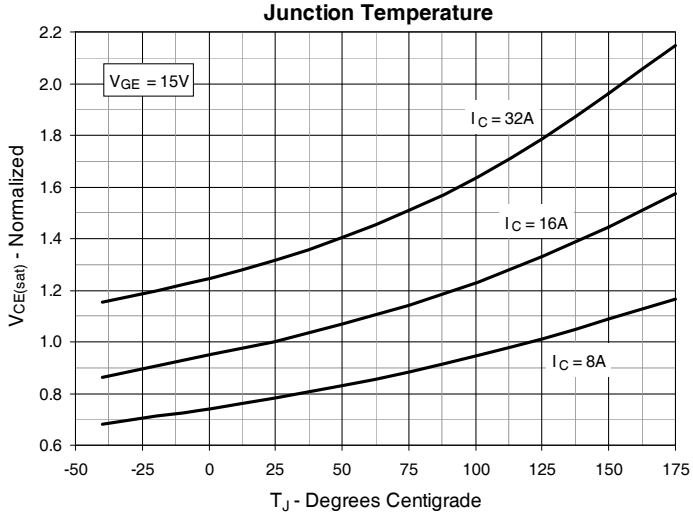

Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage

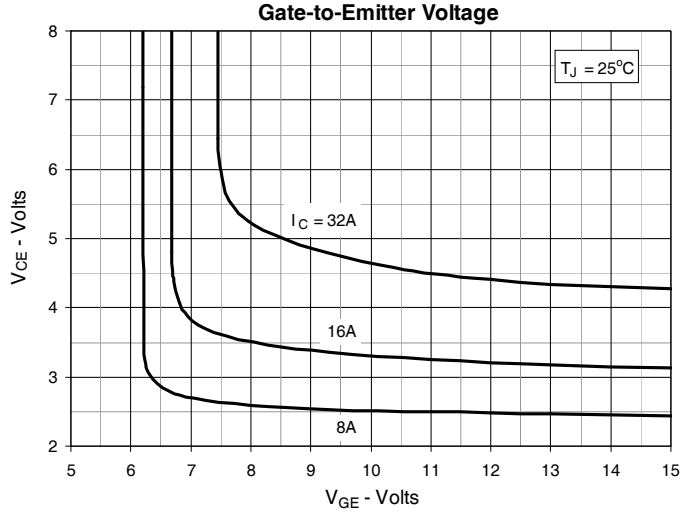

Fig. 6. Input Admittance

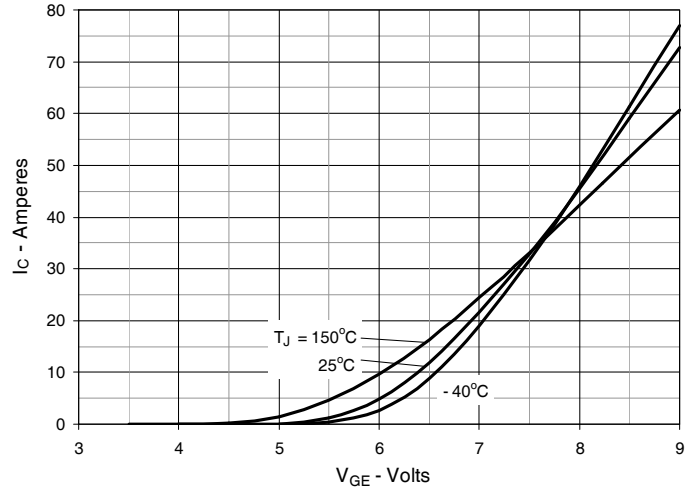

© 2017 IXYS CORPORATION, All Rights Reserved

Fig. 7. Transconductance

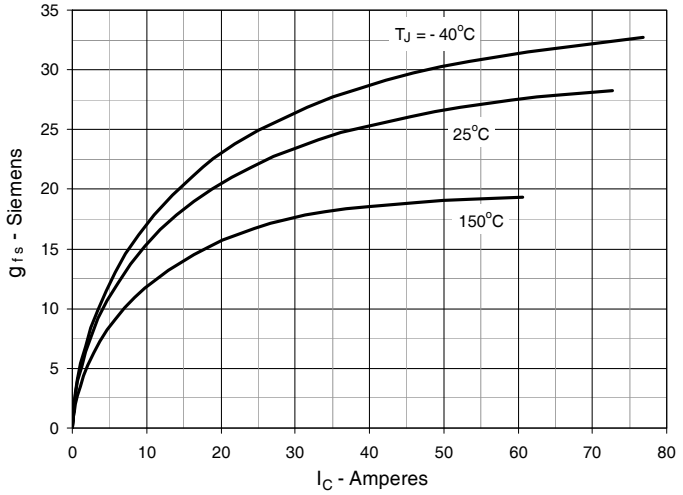

Fig. 8. Gate Charge

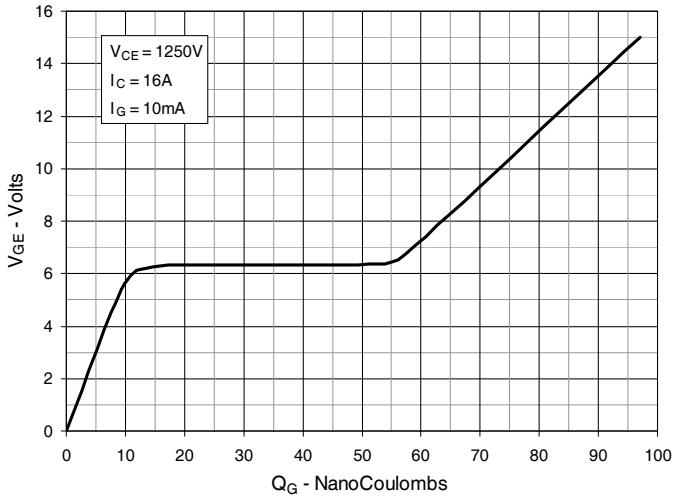

Fig. 9. Capacitance

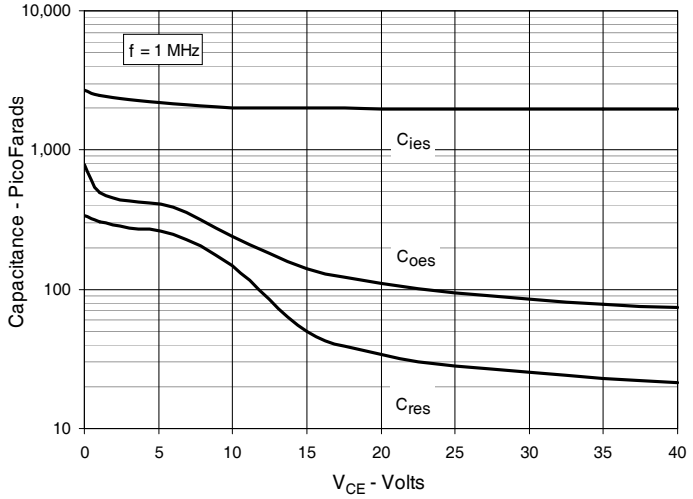

Fig. 10. Reverse-Bias Safe Operating Area

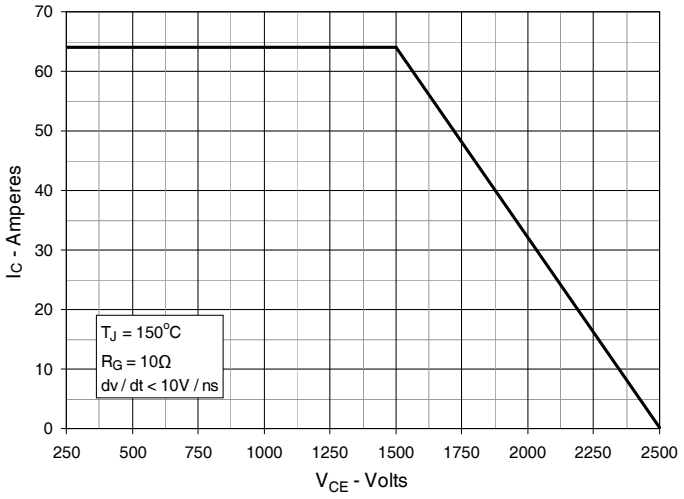

Fig. 11. Maximum Transient Thermal Impedance (IGBT)

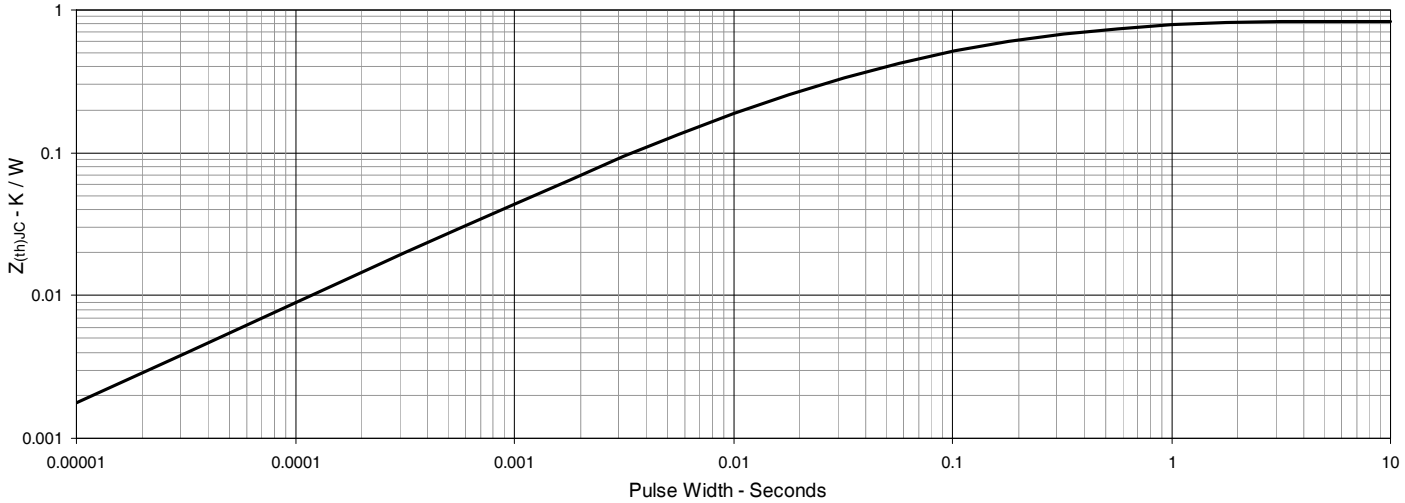

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 12. Inductive Switching Energy Loss vs. Gate Resistance

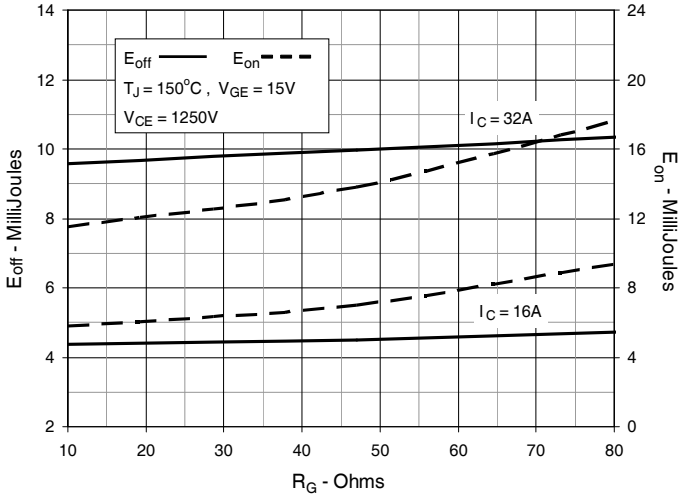

Fig. 13. Inductive Switching Energy Loss vs. Collector Current

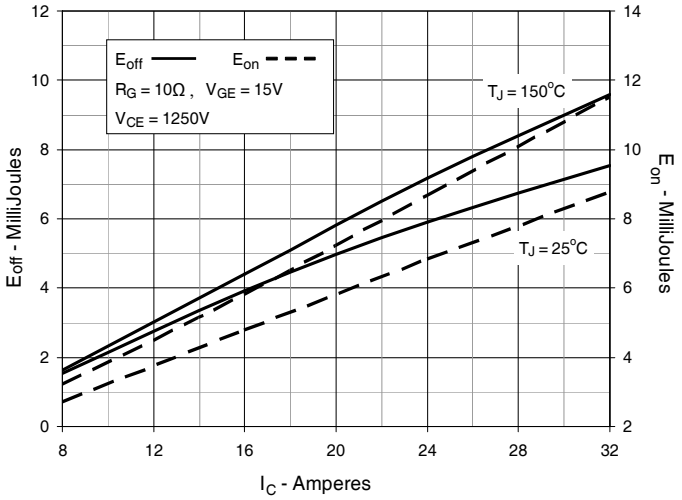

Fig. 14. Inductive Switching Energy Loss vs. Junction Temperature

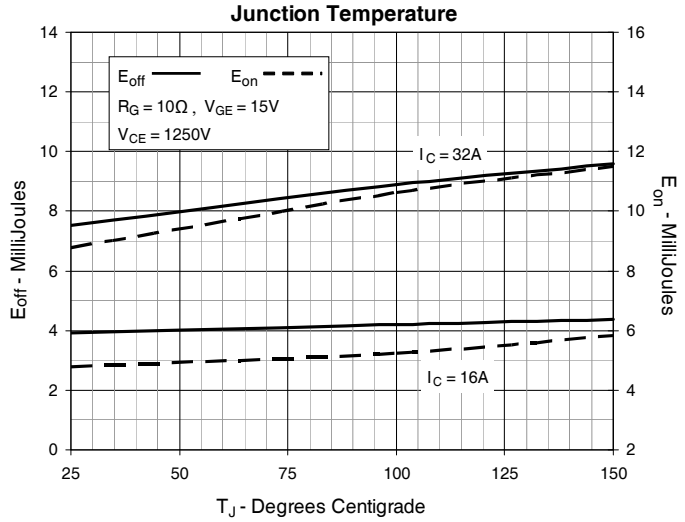

Fig. 15. Inductive Turn-off Switching Times vs. Gate Resistance

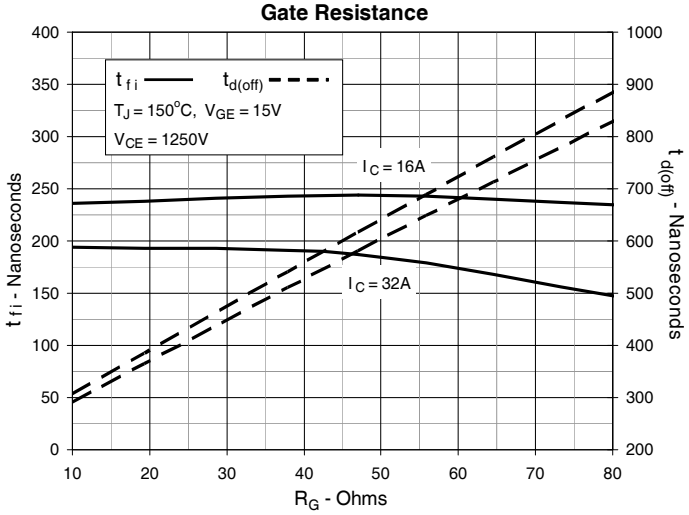

Fig. 16. Inductive Turn-off Switching Times vs. Collector Current

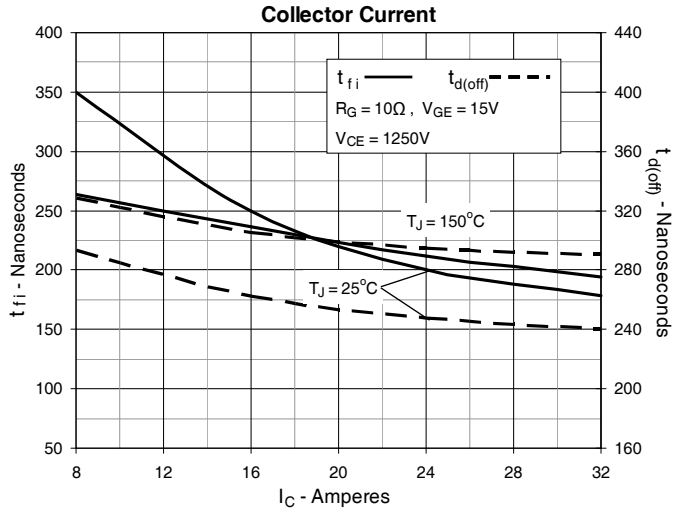

Fig. 17. Inductive Turn-off Switching Times vs. Junction Temperature

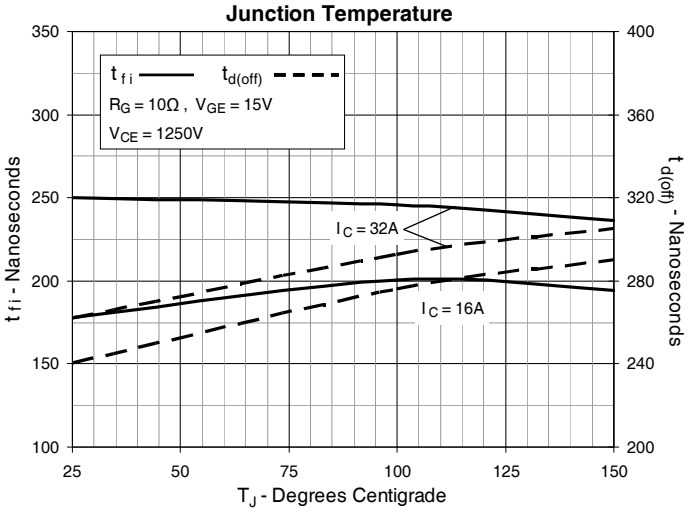

© 2017 IXYS CORPORATION, All Rights Reserved

Fig. 18. Inductive Turn-on Switching Times vs. Gate Resistance

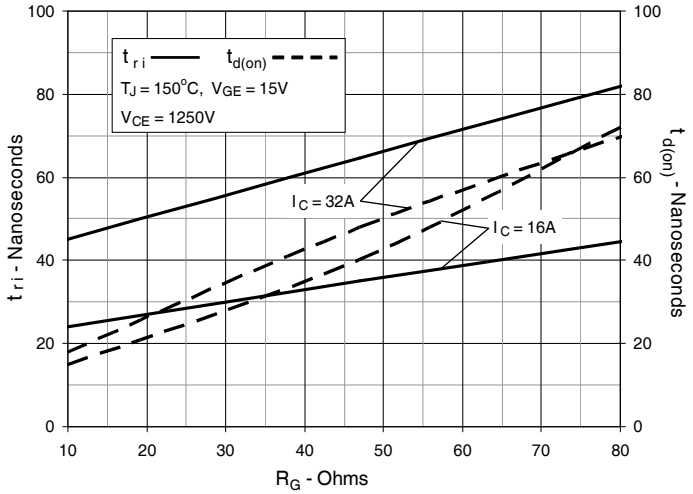

Fig. 19. Inductive Turn-on Switching Times vs. Collector Current

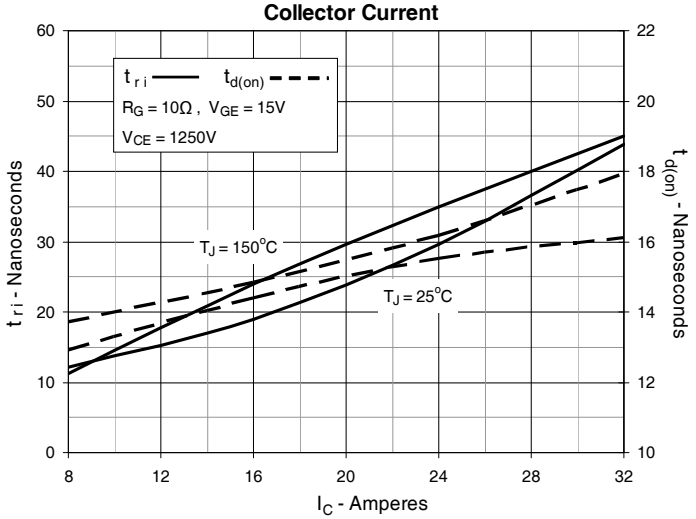

Fig. 20. Inductive Turn-on Switching Times vs. Junction Temperature

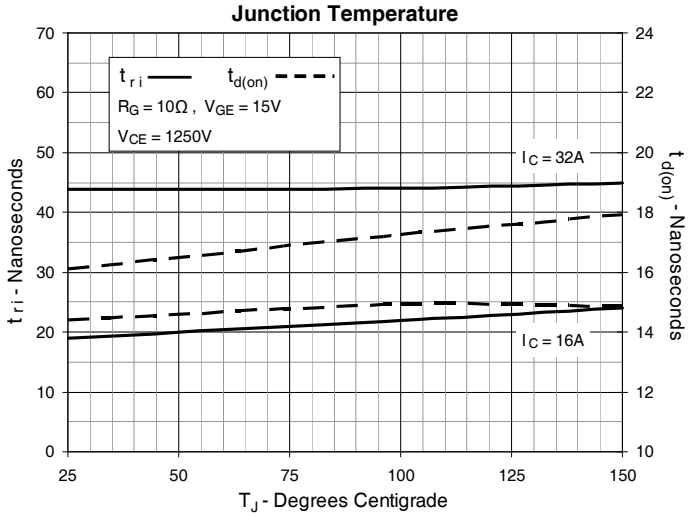

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 21. Diode Forward Characteristics

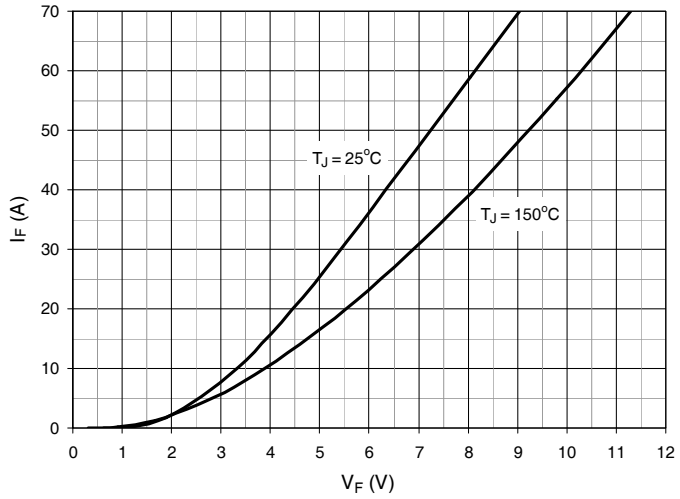

Fig. 22. Reverse Recovery Charge vs. -di$_F$/dt

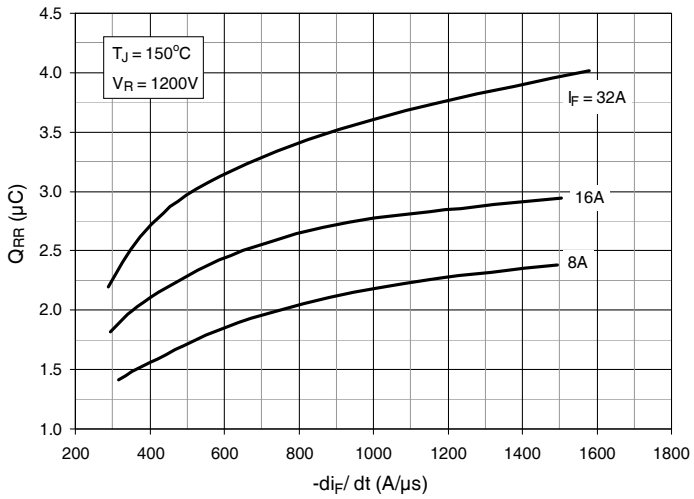

Fig. 23 Reverse Recovery Current vs. -di$_F$/dt

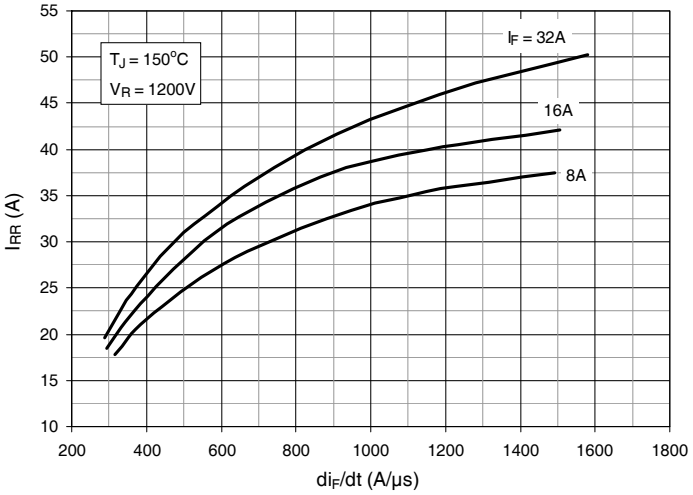

Fig. 24. Reverse Recovery Time vs. -di$_F$/dt

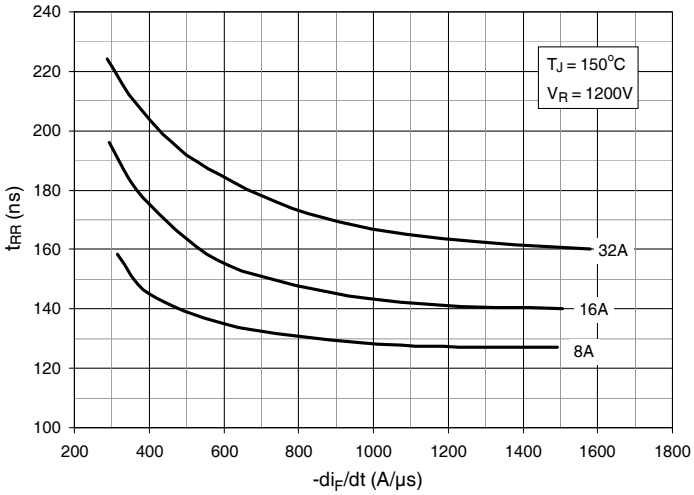

Fig. 25. Dynamic Parameters Q_{RR}, I_{RR} vs. Junction Temperature

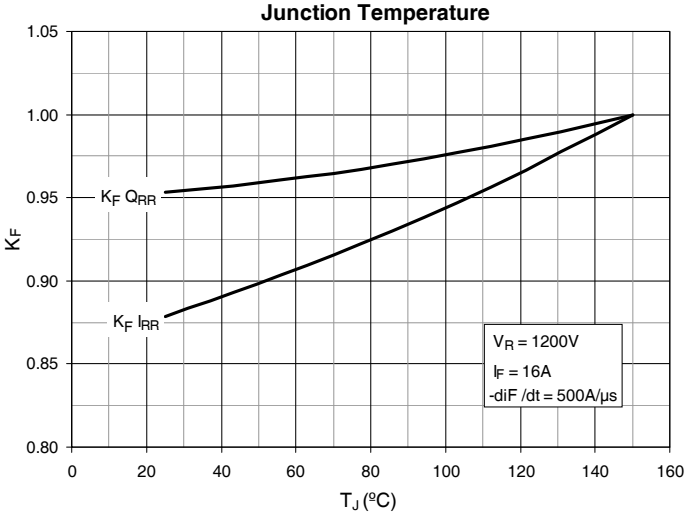

Fig. 26. Maximum Transient Thermal Impedance (Diode)

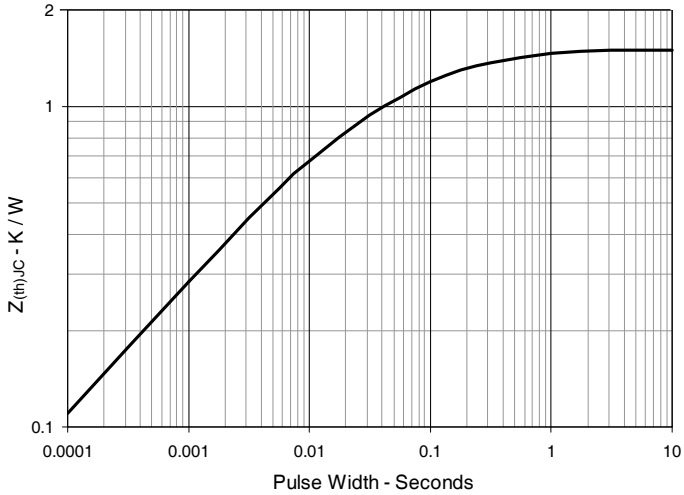

© 2017 IXYS CORPORATION, All Rights Reserved

IXYS
A Littelfuse Technology

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.