

High Efficiency Thyristor


V_{RRM} = 1200 V
 I_{TAV} = 50 A
 V_T = 1,27 V

Single Thyristor


Part number

CLA50E1200TC

Marking on Product: *CLA50E1200TC*



Backside: anode



Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability

Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

Package: TO-268AA (D3Pak)

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Thyristor

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			1300	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			1200	V
I_{RD}	reverse current, drain current	$V_{RD} = 1200 \text{ V}$ $V_{RD} = 1200 \text{ V}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		50 4	μA mA
V_T	forward voltage drop	$I_T = 50 \text{ A}$ $I_T = 100 \text{ A}$ $I_T = 50 \text{ A}$ $I_T = 100 \text{ A}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		1,32 1,60 1,27 1,65	V V
I_{TAV}	average forward current	$T_C = 125^\circ C$	$T_{VJ} = 150^\circ C$		50	A
$I_{T(RMS)}$	RMS forward current	180° sine			79	A
V_{TO} r_T	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 150^\circ C$		0,88 7,7	V $m\Omega$
R_{thJC}	thermal resistance junction to case				0,25	K/W
R_{thCH}	thermal resistance case to heatsink			0,15		K/W
P_{tot}	total power dissipation		$T_C = 25^\circ C$		500	W
I_{TSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ C$ $V_R = 0 \text{ V}$		650 700 555 595	A A
I^2t	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ C$ $V_R = 0 \text{ V}$		2,12 2,04 1,54 1,48	kA ² s kA ² s kA ² s kA ² s
C_J	junction capacitance	$V_R = 400 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$	25		pF
P_{GM}	max. gate power dissipation	$t_p = 30 \mu s$ $t_p = 300 \mu s$	$T_C = 150^\circ C$		10 5 0,5	W W W
P_{GAV}	average gate power dissipation					
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 150^\circ C; f = 50 \text{ Hz}$ repetitive, $I_T = 150 \text{ A}$ $t_p = 200 \mu s; di_G/dt = 0,3 \text{ A}/\mu s;$ $I_G = 0,3 \text{ A}; V_D = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 50 \text{ A}$			150	A/ μs
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V_D = \frac{2}{3} V_{DRM}$ $R_{GK} = \infty$; method 1 (linear voltage rise)	$T_{VJ} = 150^\circ C$		1000	V/ μs
V_{GT}	gate trigger voltage	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = -40^\circ C$		1,5 1,6	V V
I_{GT}	gate trigger current	$V_D = 6 \text{ V}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = -40^\circ C$		50 80	mA mA
V_{GD}	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 150^\circ C$		0,2	V
I_{GD}	gate non-trigger current				3	mA
I_L	latching current	$t_p = 10 \mu s$ $I_G = 0,3 \text{ A}; di_G/dt = 0,3 \text{ A}/\mu s$	$T_{VJ} = 25^\circ C$		125	mA
I_H	holding current	$V_D = 6 \text{ V}$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ C$		100	mA
t_{gd}	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$ $I_G = 0,3 \text{ A}; di_G/dt = 0,3 \text{ A}/\mu s$	$T_{VJ} = 25^\circ C$		2	μs
t_q	turn-off time	$V_R = 100 \text{ V}; I_T = 50 \text{ A}; V_D = \frac{2}{3} V_{DRM}$ $T_{VJ} = 125^\circ C$ $di/dt = 10 \text{ A}/\mu s$ $dv/dt = 20 \text{ V}/\mu s$ $t_p = 200 \mu s$		200		μs

Package TO-268AA (D3Pak)


Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
I_{RMS}	RMS current	per terminal			70	A
T_{VJ}	virtual junction temperature		-40		150	°C
T_{op}	operation temperature		-40		125	°C
T_{stg}	storage temperature		-40		150	°C
Weight				5		g
F_c	mounting force with clip		20		120	N

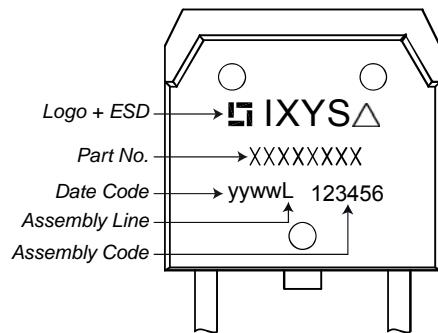
Product Marking

Part description

C = Thyristor (SCR)
 L = High Efficiency Thyristor
 A = (up to 1200V)
 50 = Current Rating [A]
 E = Single Thyristor
 1200 = Reverse Voltage [V]
 TC = TO-268AA (D3Pak) (2)


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	CLA50E1200TC-TUB	CLA50E1200TC	Tube	30	502708
Alternative	CLA50E1200TC-TRL	CLA50E1200TC	Tape & Reel	400	502737

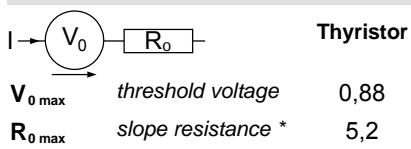Similar Part	Package	Voltage class
CLA50E1200HB	TO-247AD (3)	1200

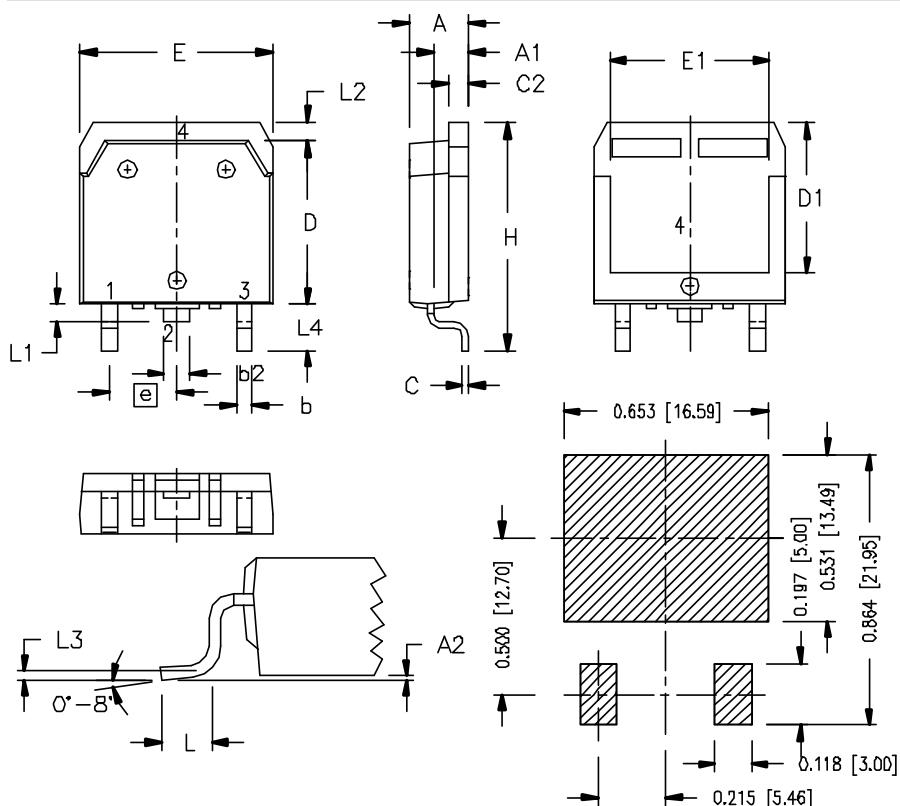Equivalent Circuits for Simulation
* on die level
 $T_{VJ} = 150^\circ\text{C}$


Outlines TO-268AA (D3Pak)


Dim.	Millimeter		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.70	2.90	0.106	0.114
A2	0.02	0.25	0.001	0.100
b	1.15	1.45	0.045	0.057
b2	1.90	2.10	0.075	0.083
C	0.40	0.65	0.016	0.026
C2	1.45	1.60	0.057	0.063
D	13.80	14.00	0.543	0.551
D1	12.40	12.70	0.488	0.500
E	15.85	16.05	0.624	0.632
E1	13.30	13.60	0.524	0.535
e	5.45 BSC		0.215 BSC	
H	18.70	19.10	0.736	0.752
L	2.40	2.70	0.094	0.106
L1	1.20	1.40	0.047	0.055
L2	1.00	1.15	0.039	0.045
L3	0.25 BSC		0.100 BSC	
L4	3.80	4.10	0.150	0.161

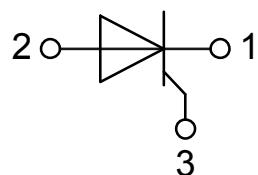RECOMMENDED MINIMUM FOOT PRINT FOR SMD


Thyristor

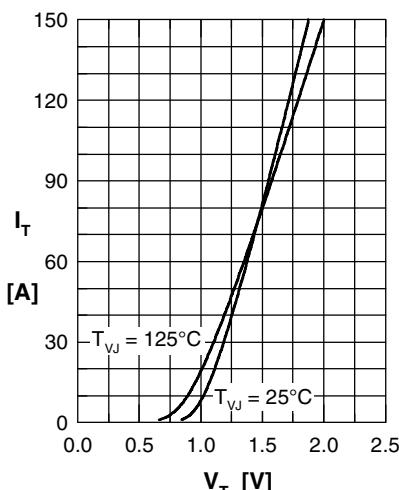


Fig. 1 Forward characteristics

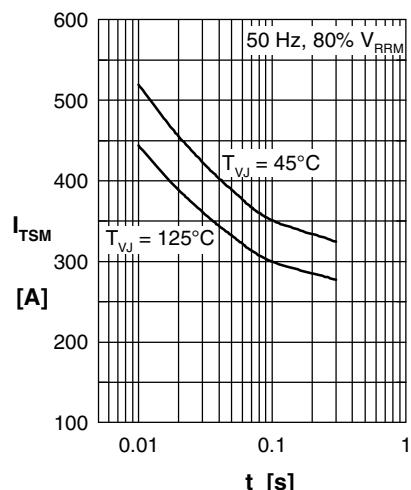


Fig. 2 Surge overload current
 I_{TSM} : crest value, t : duration

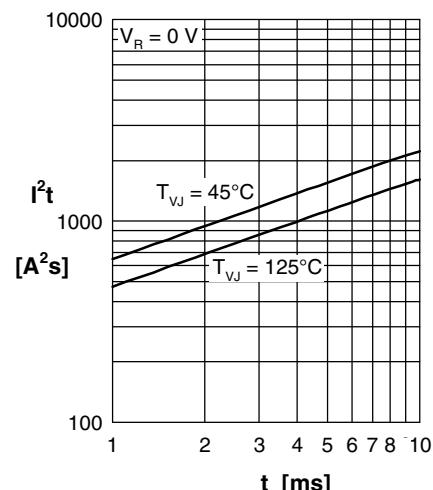


Fig. 3 I^2t versus time (1-10 s)

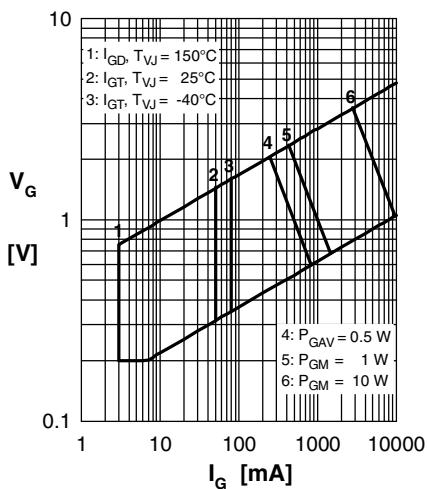


Fig. 4 Gate voltage & gate current

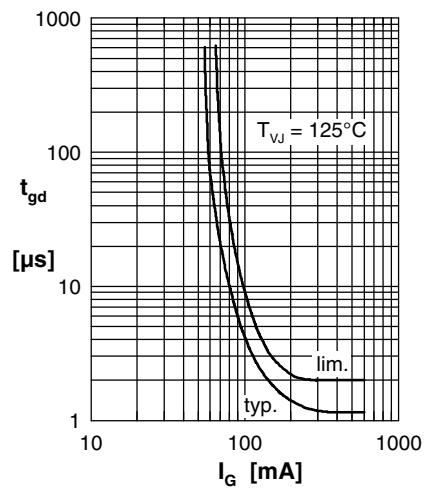


Fig. 5 Gate controlled delay time t_{gd}

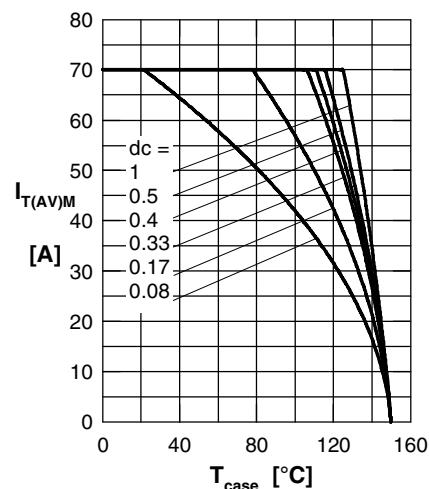


Fig. 6 Max. forward current at case temperature

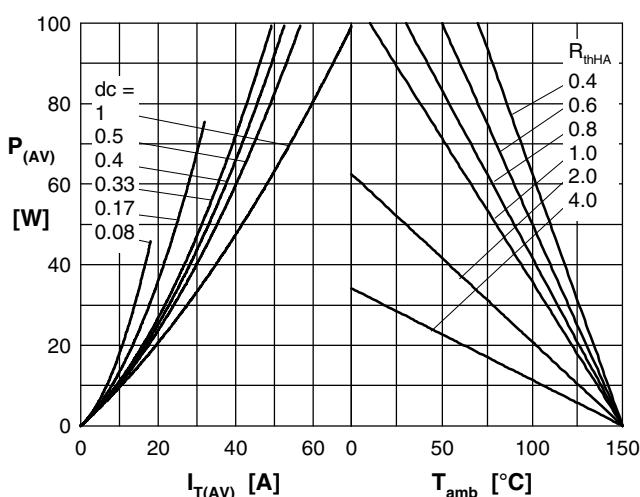


Fig. 7a Power dissipation versus direct output current
Fig. 7b and ambient temperature

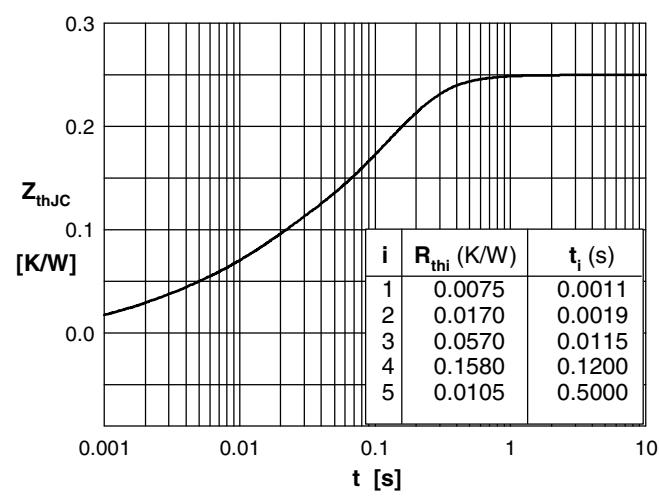


Fig. 7 Transient thermal impedance junction to case