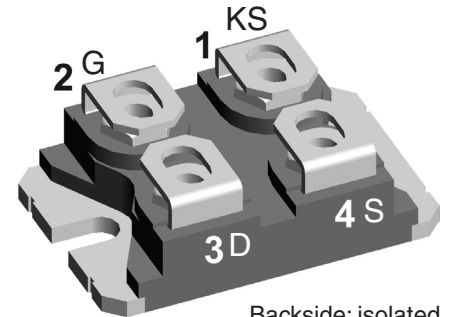


SiC Power MOSFET

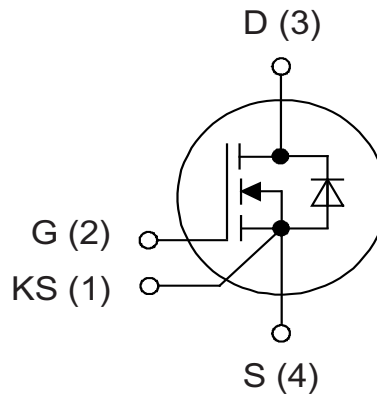
$$\begin{aligned} I_{D25} &= 68 \text{ A} \\ V_{DSS} &= 1200 \text{ V} \\ R_{DS(on) \text{ max}} &= 34 \text{ m}\Omega \end{aligned}$$

Kelvin Source gate connection

Part number
IXFN70N120SK



Backside: isolated
E72873



Features / Advantages:

- High speed switching with low capacitances
- High blocking voltage with low $R_{DS(on)}$
- Easy to parallel and simple to drive
- Resistant to latch-up
- Real Kelvin source connection

Applications:

- Solar inverters
- High voltage DC/DC converters
- Motor drives
- Switch mode power supplies
- UPS
- Battery chargers
- Induction heating

Package: SOT-227B (minibloc)

- Isolation Voltage: 2500 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Base plate with Aluminium nitride isolation
- Advanced power cycling

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.



MOSFET			Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.	
V_{DS}	drain source breakdown voltage	$V_{GS} = 0 \text{ V}$, $I_D = 100 \mu\text{A}$	1200			V
V_{GSM}	max transient gate source voltage		-10		+25	V
V_{GS}	continous gate source voltage	recommended operational value	-5		+20	V
I_{D25}	drain current	$T_C = 25^\circ\text{C}$			68	A
I_{D80}		$T_C = 80^\circ\text{C}$			55	A
I_{D100}		$T_C = 100^\circ\text{C}$			48	A
$I_{D(pulse)}$	pulsed drain current	pulse width limited by $T_{VJ \max}$			170	A
P_D	power dissipation	$T_C = 25^\circ\text{C}$, $T_{VJ} = 175^\circ\text{C}$			333	W
R_{DSon}	static drain source on resistance	$I_D = 50 \text{ A}$; $V_{GS} = 20 \text{ V}$		25 52	34	mΩ mΩ
$V_{GS(th)}$	gate threshold voltage	$I_D = 15 \text{ mA}$; $V_{GS} = V_{DS}$	2.0	2.6 2.1	4.0	V V
I_{DSS}	drain source leakage current	$V_{DS} = 1200 \text{ V}$; $V_{GS} = 0 \text{ V}$		2	100	μA
I_{GSS}	gate source leakage current	$V_{DS} = 0 \text{ V}$; $V_{GS} = 20 \text{ V}$			0.6	μA
R_G	internal gate resistance	$f = 1 \text{ MHz}$, $V_{AC} = 25 \text{ mV}$, ESR of C_{ISS}		1.1		Ω
C_{iss}	input capacitance	$V_{DS} = 1000 \text{ V}$; $V_{GS} = 0 \text{ V}$; $f = 1 \text{ MHz}$ $T_{VJ} = 25^\circ\text{C}$		2790		pF
C_{oss}	output capacitance			220		pF
C_{rss}	reverse transfer (Miller) capacitance			15		pF
Q_g	total gate charge	$V_{DS} = 800 \text{ V}$; $I_D = 50 \text{ A}$; $V_{GS} = -5/20 \text{ V}$ $T_{VJ} = 25^\circ\text{C}$		161		nC
Q_{gs}	gate source charge			46		nC
Q_{gd}	gate drain (Miller) charge			50		nC
$t_{d(on)}$	turn-on delay time	Inductive switching $V_{DS} = 800 \text{ V}$; $I_D = 50 \text{ A}$ $T_{VJ} = 25^\circ\text{C}$ $V_{GS} = -5 / 20 \text{ V}$; $R_G = 15 \Omega$ (external) Freewheeling diode is Mosfet's body diode		30		ns
t_r	current rise time			15		ns
$t_{d(off)}$	turn-off delay time			82		ns
t_f	current fall time			27		ns
E_{on}	turn-on energy per pulse			1.35		mJ
E_{off}	turn-off energy per pulse			0.76		mJ
$E_{rec(off)}$	reverse recovery losses at turn-off			0.13		mJ
$t_{d(on)}$	turn-on delay time			28		ns
t_r	current rise time			12		ns
$t_{d(off)}$	turn-off delay time			125		ns
t_f	current fall time			28		ns
E_{on}	turn-on energy per pulse	Inductive switching $V_{DS} = 800 \text{ V}$; $I_D = 50 \text{ A}$ $T_{VJ} = 150^\circ\text{C}$ $V_{GS} = -5 / 20 \text{ V}$; $R_G = 15 \Omega$ (external) Freewheeling diode is Mosfet's body diode		1.71		mJ
E_{off}	turn-off energy per pulse			0.78		mJ
$E_{rec(off)}$	reverse recovery losses at turn-off			0.29		mJ
R_{thJC}	thermal resistance junction to case				0.45	K/W
R_{thJH}	thermal resistance junction to heatsink	with heatsink compound; IXYS test setup		0.6		K/W
Source-Drain Diode			Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.	
V_{SD}	forward voltage drop	$I_F = 50 \text{ A}$; $V_{GS} = -5 \text{ V}$		4.3 3.7		V V
t_{rr}	reverse recovery time	$V_{GS} = -5 \text{ V}$; $I_F = 50 \text{ A}$; $V_R = 800 \text{ V}$ $T_{VJ} = 25^\circ\text{C}$		35		ns
Q_{RM}	reverse recovery charge (intrinsic diode)	Mosfet gate drive: $V_{GS} = -5 / 20 \text{ V}$; $R_G = 15 \Omega$		0.52		μC
I_{RM}	max. reverse recovery current			33		A
dI_F/dt	current slew rate			3380		A/μs
t_{rr}	reverse recovery time	$V_{GS} = -5 \text{ V}$; $I_F = 50 \text{ A}$; $V_R = 800 \text{ V}$ $T_{VJ} = 150^\circ\text{C}$		30		ns
Q_{RM}	reverse recovery charge (intrinsic diode)	Mosfet gate drive: $V_{GS} = -5 / 20 \text{ V}$; $R_G = 15 \Omega$		1.23		μC
I_{RM}	max. reverse recovery current			59		A
dI_F/dt	current slew rate			4250		A/μs

Note: When using SiC Body Diode the maximum recommended $V_{GS} = -5\text{V}$

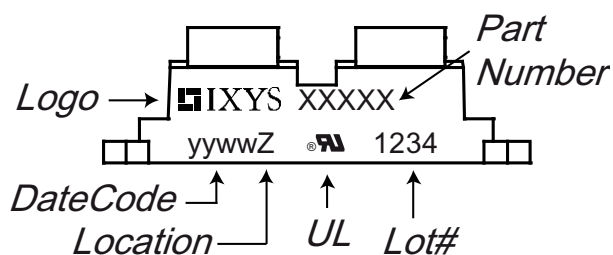
IXYS reserves the right to change limits, test conditions and dimensions.

20221012e

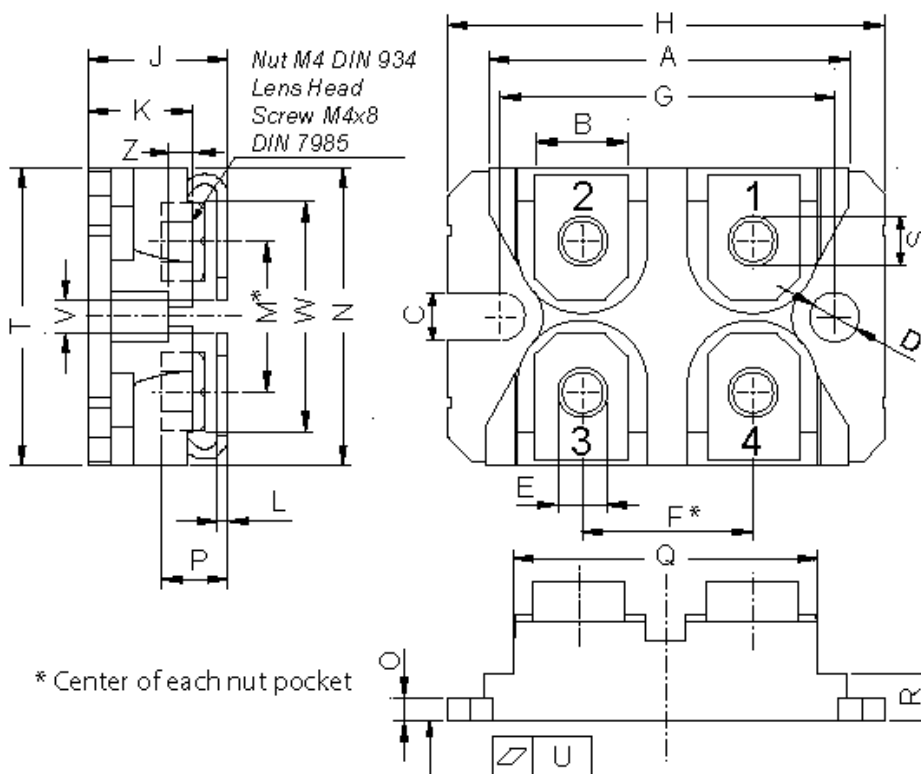
Package Outlines SOT-227B (minibloc)			Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			100	A
T_{stg}	storage temperature		-40		150	°C
T_{op}	operation temperature		-40		150	°C
T_{vj}	virtual junction temperature		-40		175	°C
Weight				30		g
M_D	mounting torque ¹⁾	screws to heatsink terminal connection screws			1.5 1.3	Nm Nm
d_{Spp}	creepage distance on surface	terminal to terminal	10.5			mm
d_{Spb}		terminal to backside	8.5			mm
d_{App}	striking distance through air	terminal to terminal	3.2			mm
d_{Apb}		terminal to backside	6.8			mm
V_{ISOL}	isolation voltage	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$ $t = 1 \text{ sec.}$ $t = 1 \text{ minute}$	3000 2500			V V
C_p	coupling capacity per switch	between drain and back side metallization with gate and source shorted		42		pF

¹⁾ further information see application note IXAN0073 on
www.ixys.com/TechnicalSupport/appnotes.aspx (General / Isolation, Mounting, Soldering, Cooling)

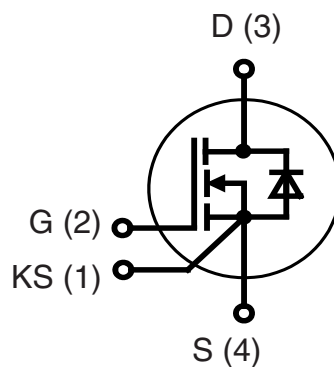
Product Marking

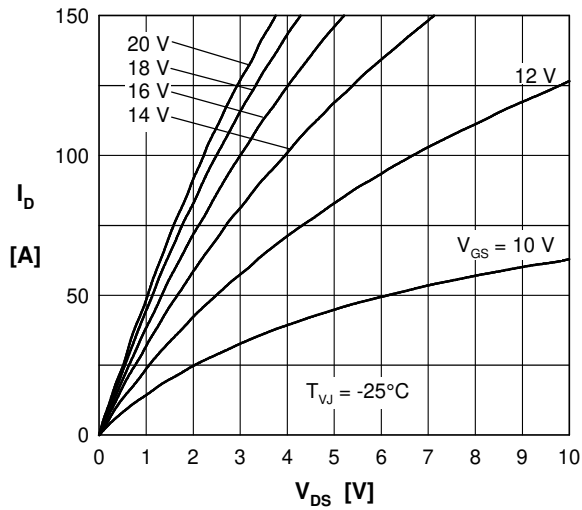
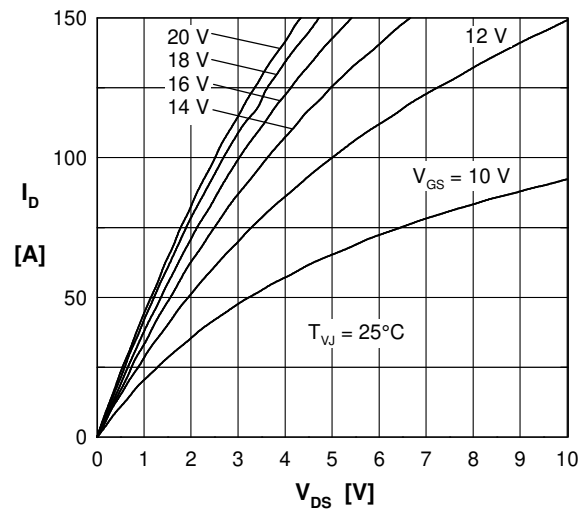
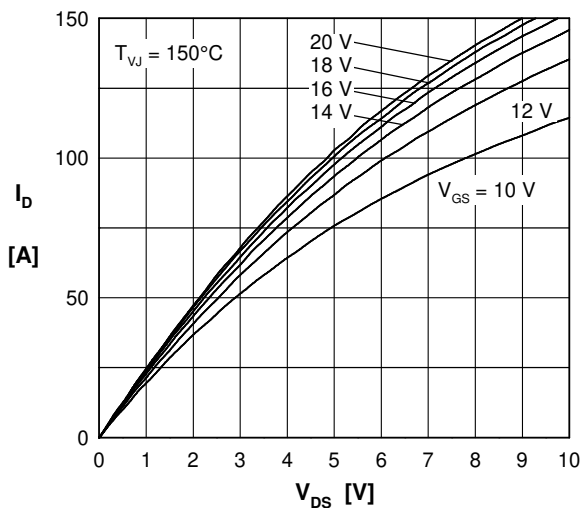
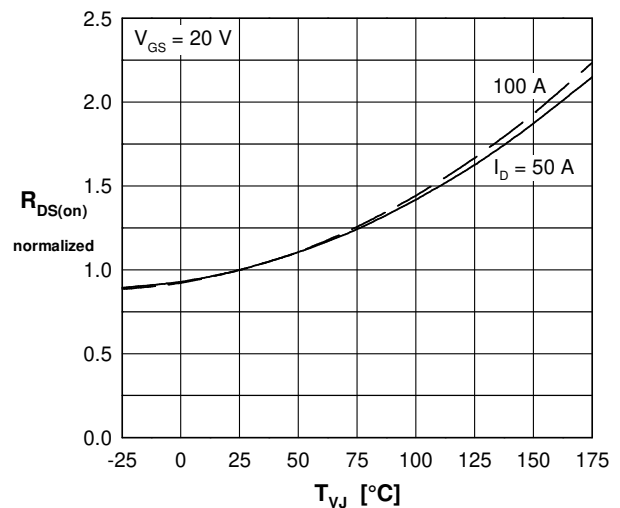
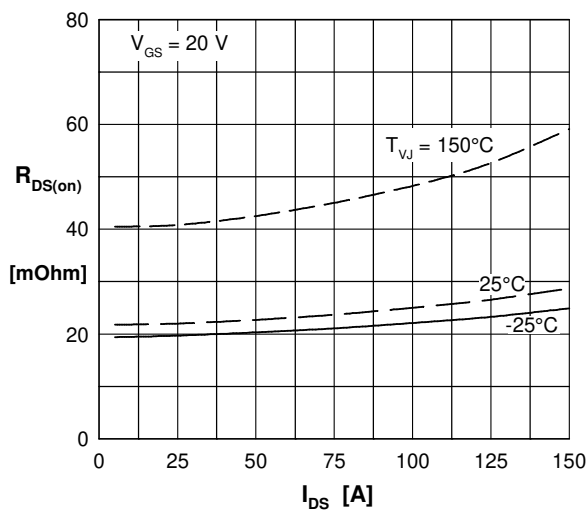
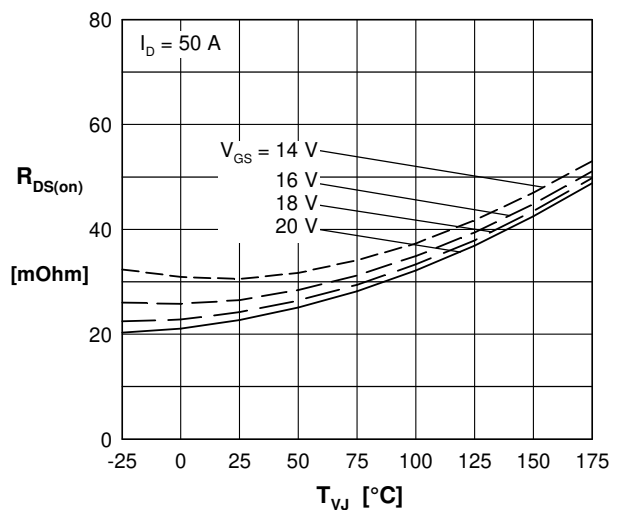


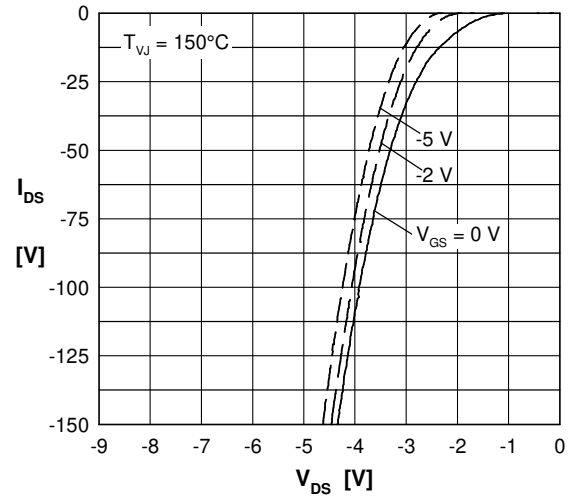
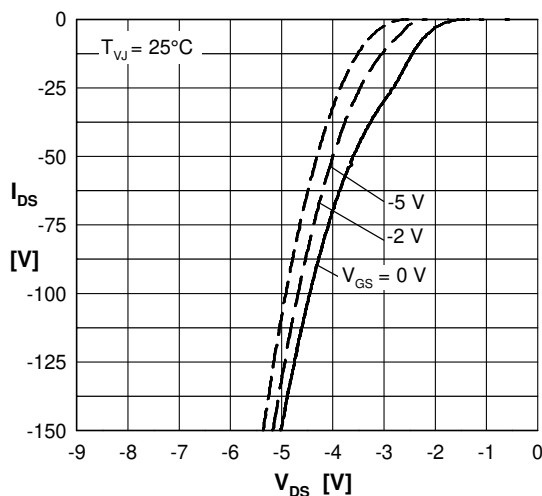
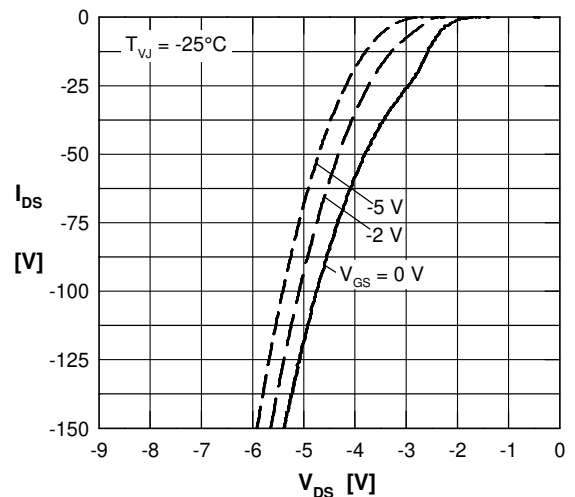
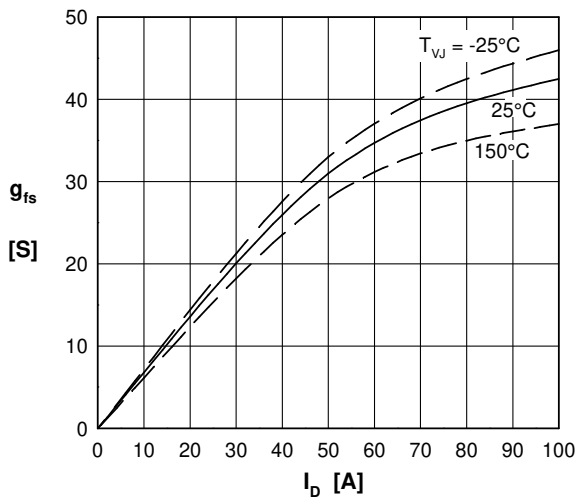
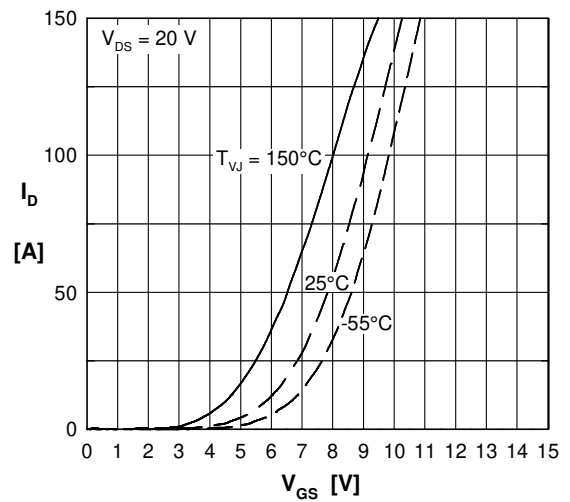
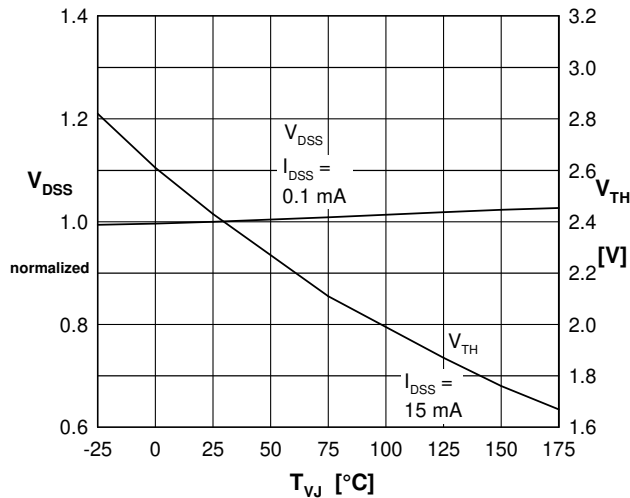
Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	IXFN70N120SK	IXFN70N120SK	Tube	10	IXFN70N120SK

Outlines SOT-227B (minibloc)


Dim.	Millimeter		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.167
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106



Curves

 Fig. 1 Typical output characteristics (-25°C)

 Fig. 2 Typical output characteristics (25°C)

 Fig. 3 Typical output characteristics (150°C)

 Fig. 4 $R_{DS(on)}$ normalized vs. junction temperature T_{VJ}

 Fig. 5 $R_{DS(on)}$ versus drain current

 Fig. 6 $R_{DS(on)}$ versus junction temperature T_{VJ}

Curves




Curves

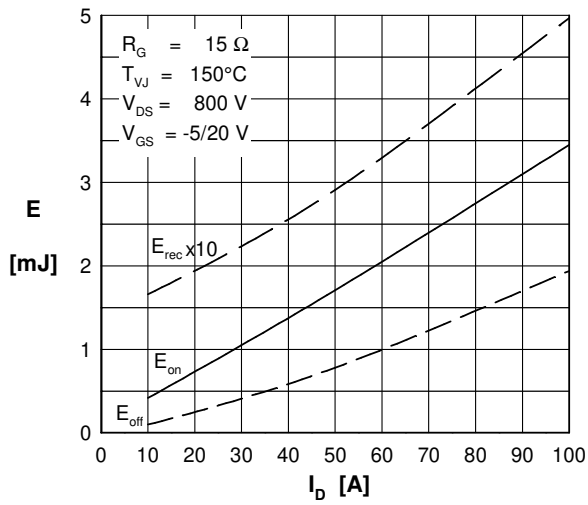


Fig. 13 Typical switching energy versus drain current

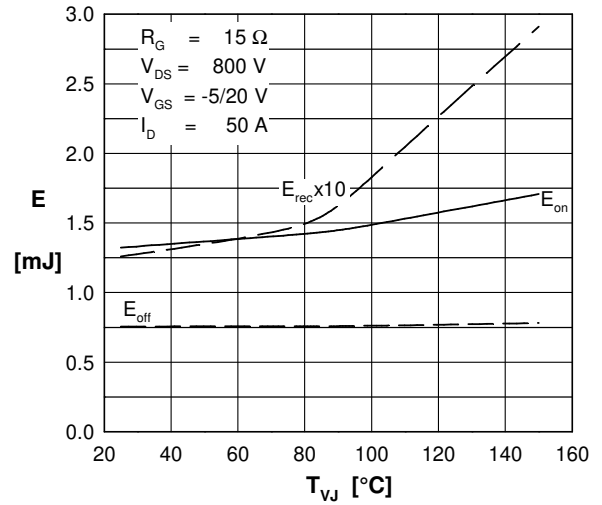


Fig. 14 Typical switching energy versus temperature

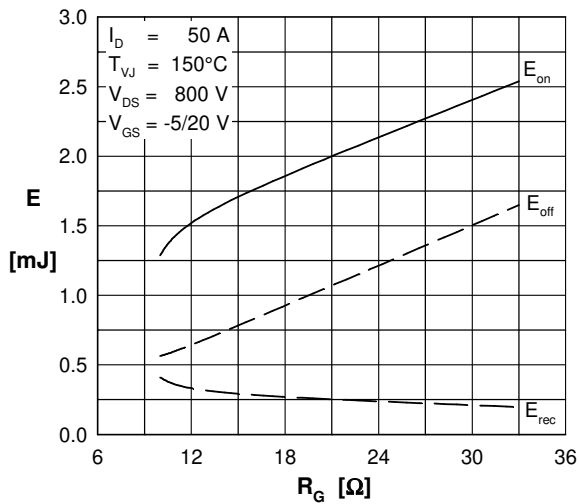


Fig. 15 Typical switching energy versus external gate resistor

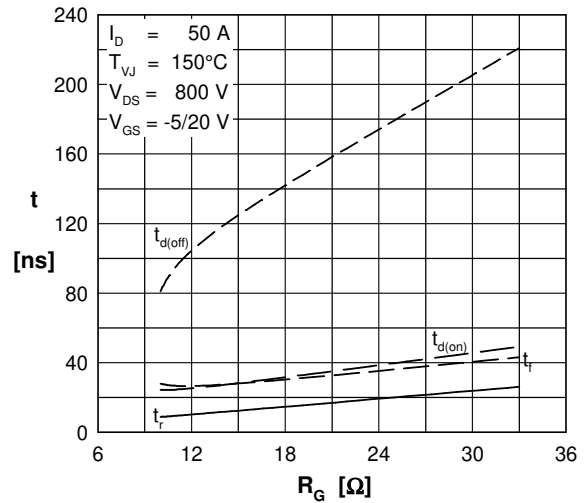


Fig. 16 Typical switching time versus external gate resistor

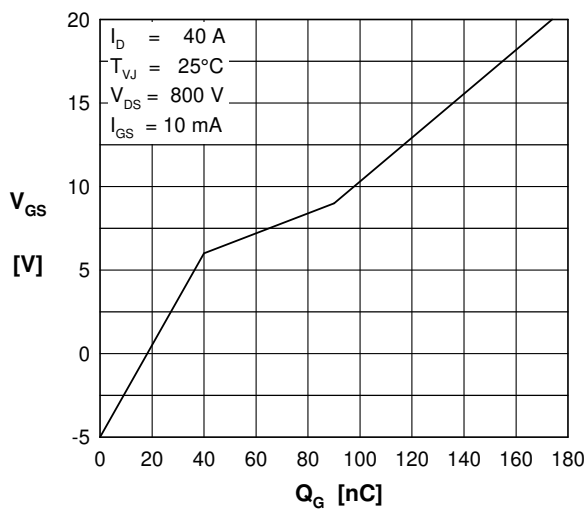


Fig. 17 Typical turn on gate charge, trendline

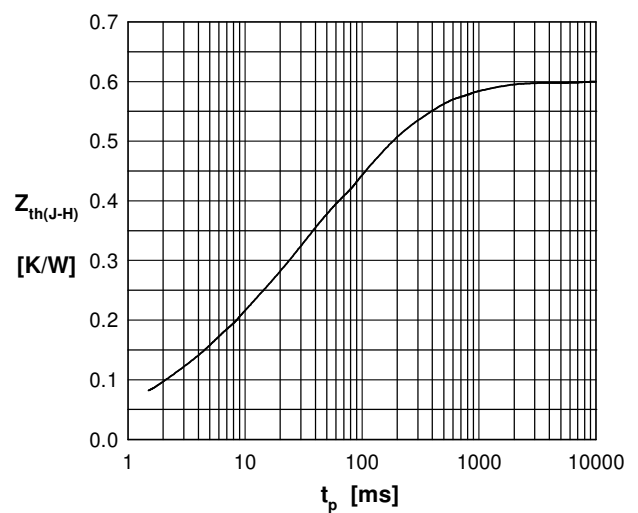


Fig. 18 Typical transient thermal impedance