

preliminary


Sonic Fast Recovery Diode

V_{RRM}	=	1800 V
I_{FAV}	=	20 A
t_{rr}	=	300 ns


High Performance Fast Recovery Diode
 Low Loss and Soft Recovery
 Single Diode

Part number

DH20-18A



Backside: cathode



Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{rm} -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{rm} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

Package: TO-247

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Fast Diode				Ratings				
Symbol	Definition	Conditions		min.	typ.	max.	Unit	
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				1800	V	
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				1800	V	
I _R	reverse current, drain current	V _R = 1800 V	T _{VJ} = 25°C			50	μA	
		V _R = 1800 V	T _{VJ} = 125°C			0.2	mA	
V _F	forward voltage drop	I _F = 20 A	T _{VJ} = 25°C			2.24	V	
		I _F = 40 A				2.83	V	
		I _F = 20 A	T _{VJ} = 125°C			2.35	V	
		I _F = 40 A				3.25	V	
I _{FAV}	average forward current	T _C = 95°C rectangular d = 0.5	T _{VJ} = 150°C			20	A	
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 150°C		1.44	V	
r _F	slope resistance					43	mΩ	
R _{thJC}	thermal resistance junction to case					0.9	K/W	
R _{thCH}	thermal resistance case to heatsink				0.3		K/W	
P _{tot}	total power dissipation	T _C = 25°C				140	W	
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; V _R = 0 V		T _{VJ} = 45°C		150	A	
C _J	junction capacitance	V _R = 900 V f = 1 MHz		T _{VJ} = 25°C	7		pF	
I _{RM}	max. reverse recovery current	} I _F = 20 A; V _R = 900 V -di _F /dt = 400 A/μs		T _{VJ} = 25 °C	22		A	
				T _{VJ} = 125 °C	25		A	
t _{rr}	reverse recovery time			T _{VJ} = 25 °C	300		ns	
				T _{VJ} = 125 °C	550		ns	

preliminary

Package TO-247			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			70	A
T_{VJ}	virtual junction temperature		-55		150	°C
T_{op}	operation temperature		-55		125	°C
T_{stg}	storage temperature		-55		150	°C
Weight				6		g
M_D	mounting torque		0.8		1.2	Nm
F_C	mounting force with clip		20		120	N

Product Marking





Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DH20-18A	DH20-18A	Tube	30	499730

Equivalent Circuits for Simulation


* on die level

 $T_{VJ} = 150^{\circ}\text{C}$

			Fast Diode	
$V_{0\max}$	threshold voltage	1.44		V
$R_{0\max}$	slope resistance *	40		mΩ

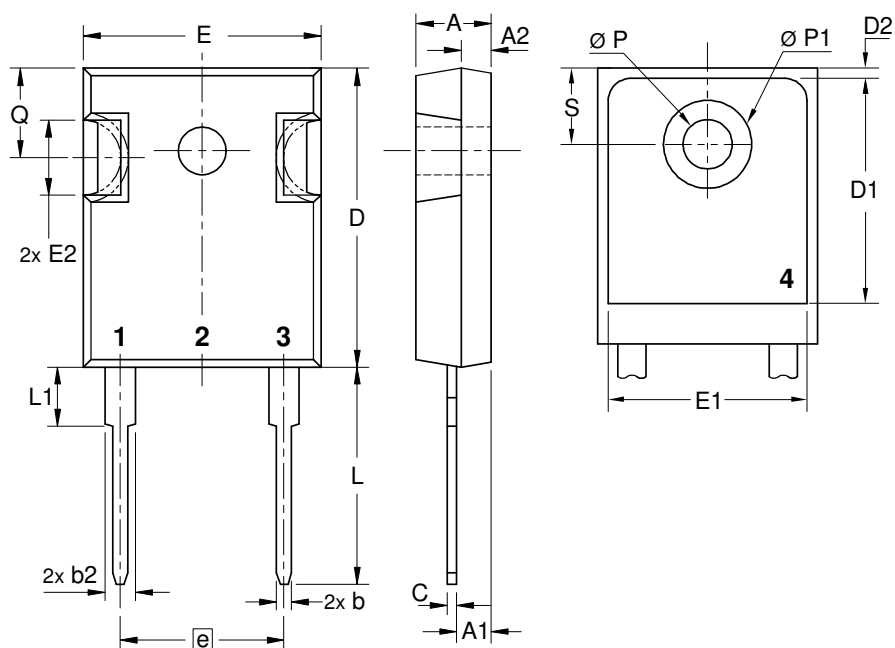Outlines TO-247


Sym.	Inches		Millimeter	
	min.	max.	min.	max.
A	0.185	0.209	4.70	5.30
A1	0.087	0.102	2.21	2.59
A2	0.059	0.098	1.50	2.49
D	0.819	0.845	20.79	21.45
E	0.610	0.640	15.48	16.24
E2	0.170	0.216	4.31	5.48
e	0.430	BSC	10.92	BSC
L	0.780	0.800	19.80	20.30
L1	-	0.177	-	4.49
Ø P	0.140	0.144	3.55	3.65
Q	0.212	0.244	5.38	6.19
S	0.242	BSC	6.14	BSC
b	0.039	0.055	0.99	1.40
b2	0.065	0.094	1.65	2.39
b4	0.102	0.135	2.59	3.43
c	0.015	0.035	0.38	0.89
D1	0.515	-	13.07	-
D2	0.020	0.053	0.51	1.35
E1	0.530	-	13.45	-
Ø P1	-	0.29	-	7.39



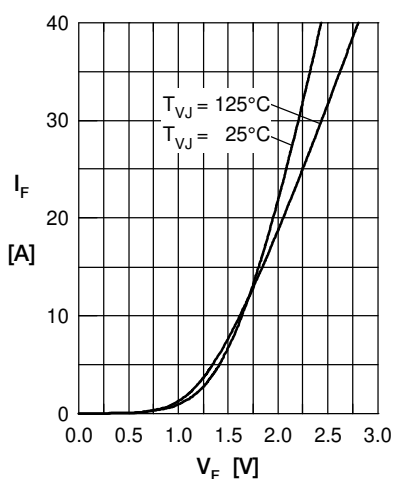
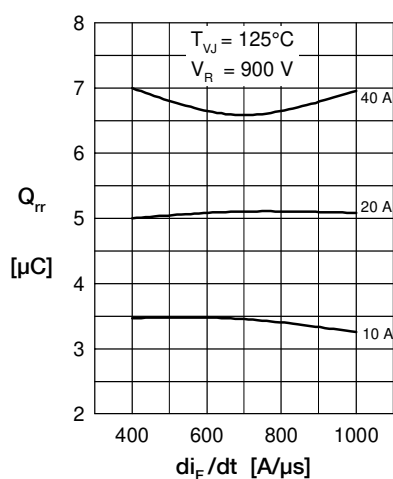
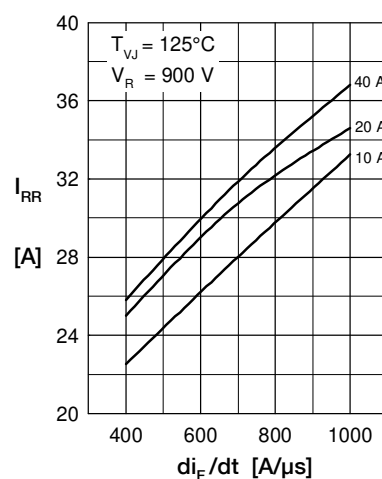
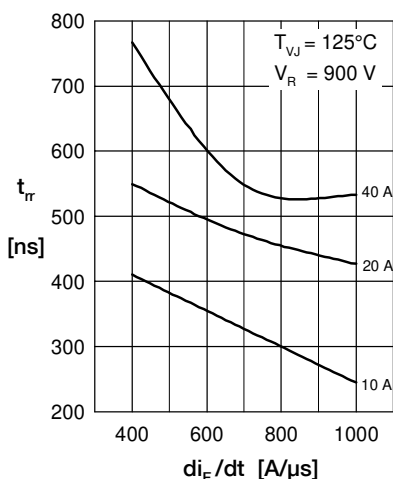
Fast Diode

 Fig. 1 Typ. Forward current versus V_F

 Fig. 2 Typ. reverse recov. charge Q_{rr} versus di/dt

 Fig. 3 Typ. peak reverse current I_{RM} versus di/dt

 Fig. 4 Dynamic parameters Q_{rr} , I_{RM} versus T_{VJ}

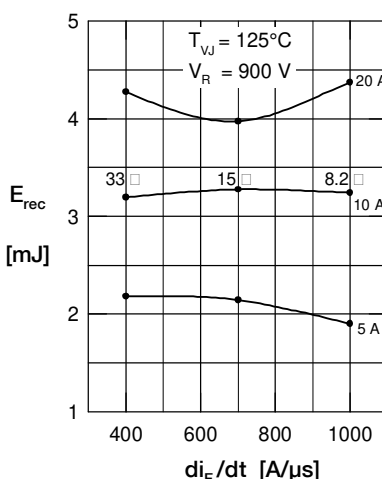
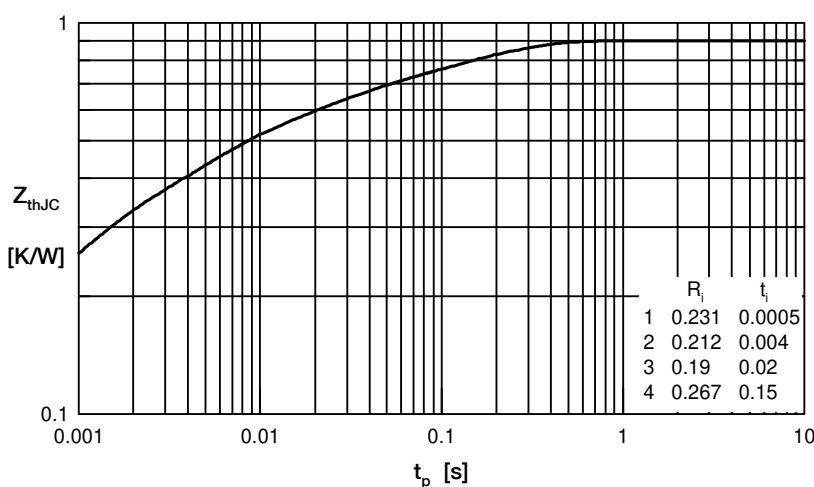
 Fig. 5 Typ. recovery time t_{rr} versus di/dt

 Fig. 6 Typ. recovery energy E_{rec} versus di/dt


Fig. 7 Typ. transient thermal impedance junction to case