

preliminary data

$$I_{FAVM} = 2 \times 147 \text{ A}$$



$$V_{RRM} = 600 \text{ V}$$

$$t_{rr} = 35 \text{ ns}$$

Fast Recovery Epitaxial Diode (FRED)

Part number

DSEI2x161-06P

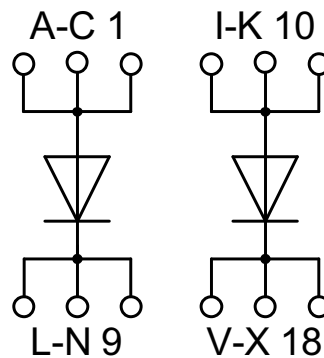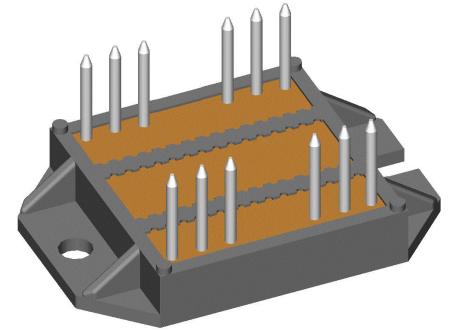

Features / Advantages:

- 2 independent FRED in 1 package
- Planar passivated chips
- Very short recovery time
- Leads suitable for PC board soldering
- Very short recovery time
- Soft recovery behaviour
- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- Low noise switching
- Small and light weight

Applications:

- Antiparallel diode for high frequency switching devices
- Anti saturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Package: ECO-PAC2

- Isolation voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Height: 9 mm
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.



preliminary data

Diode				Ratings			
Symbol	Definitions	Conditions		min.	typ.	max.	
I_{FRMS}	RMS forward current		$T_{VJ} = T_{VJM}$			270	A
I_{FAVM} ①	max. average forward current	rectangular, d = 0.5	$T_C = 70^\circ\text{C}$			147	A
I_{FSM}	max. surge forward current	t = 10 ms (50 Hz), sine	$T_{VJ} = 45^\circ\text{C}$			1200	A
		t = 8.3 ms (60 Hz), sine				1300	A
		t = 10 ms (50 Hz), sine	$T_{VJ} = 150^\circ\text{C}$			1080	A
		t = 8.3 ms (60 Hz), sine				1170	A
I^2t	I^2t value for fusing	t = 10 ms (50 Hz), sine	$T_{VJ} = 45^\circ\text{C}$			7200	A ² s
		t = 8.3 ms (60 Hz), sine				7100	A ² s
		t = 10 ms (50 Hz), sine	$T_{VJ} = 150^\circ\text{C}$			5800	A ² s
		t = 8.3 ms (60 Hz), sine				5700	A ² s
I_R	reverse current	$V_R = V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$			12	mA
		$V_R = 0.8 \cdot V_{RRM}$	$T_{VJ} = 25^\circ\text{C}$			3	mA
		$V_R = 0.8 \cdot V_{RRM}$	$T_{VJ} = 125^\circ\text{C}$			80	mA
V_F	forward voltage	$I_F = 200\text{ A}$	$T_{VJ} = 25^\circ\text{C}$			1.45	V
V_{T0}	threshold voltage	for power-loss calculations only	$T_{VJ} = T_{VJM}$			0.85	V
r_T	slope resistance					2.7	mΩ
R_{thJC}	thermal resistance junction to case				0.20	0.29	K/W
R_{thCH}	thermal resistance junction to heatsink						K/W
I_{RM}	max. reverse recovery current	$I_F = 100\text{ A}$; $-di_F/dt = 200\text{ A}/\mu\text{s}$ $V_R = 100\text{ V}$; $L \leq 0.05\text{ }\mu\text{H}$	$T_{VJ} = 100^\circ\text{C}$		45		A
t_{rr}	reverse recovery time	$I_F = 1\text{ A}$; $-di/dt = 400\text{ A}/\mu\text{s}$; $V_R = 30\text{ V}$	$T_{VJ} = 25^\circ\text{C}$		35		ns

① I_{FAVM} rating includes reverse blocking losses at T_{VJM} , $V_R = 0.8 V_{RRM}$, duty cycle d = 0.5

preliminary data

Package	ECO-PAC2			Ratings			
Symbol	Definitions	Conditions		min.	typ.	max.	
I_{RMS}	<i>RMS current</i>	per terminal				100	A
T_{VJ}	<i>virtual junction temperature</i>			-40		150	°C
T_{op}	<i>operation temperature</i>			-40		125	°C
T_{stg}	<i>storage temperature</i>			-40		125	°C
Weight					24		g
M_D	<i>mounting torque</i>			1.4		2.0	Nm
$d_{Spp/App}$	<i>creepage distance on surface</i>	terminal to terminal		6.0			mm
$d_{Spb/Appb}$	<i>striking distance through air</i>	terminal to backside		10.0			mm
V_{ISOL}	<i>isolation voltage</i>	t = 1 second t = 1 minute	50/60 Hz, RMS; $I_{ISOL} \leq 1\text{ mA}$	3000 2500			V V

