


# HiPerFET™ Power MOSFETs

N-Channel Enhancement Mode  
High dv/dt, Low  $t_{rr}$ , HDMOS™ Family

**IXFH 76 N06-11**  
**IXFH 76 N06-12**  
**IXFH 76 N07-11**  
**IXFH 76 N07-12**


$V_{DSS}$	$I_{D25}$	$R_{DS(on)}$
<b>60 V</b>	<b>76 A</b>	<b>11 mΩ</b>
<b>60 V</b>	<b>76 A</b>	<b>12 mΩ</b>
<b>70 V</b>	<b>76 A</b>	<b>11 mΩ</b>
<b>70 V</b>	<b>76 A</b>	<b>12 mΩ</b>

Preliminary data sheet



Symbol	Test Conditions	Maximum Ratings		
$V_{DSS}$	$T_J = 25^\circ\text{C}$ to $175^\circ\text{C}$	N06	60	V
$V_{DGR}$	$T_J = 25^\circ\text{C}$ to $175^\circ\text{C}$ ; $R_{GS} = 10\text{ k}\Omega$	N06	60	V
		N07	70	V
$V_{GS}$	Continuous		$\pm 20$	V
$V_{GSM}$	Transient		$\pm 30$	V
$I_{D25}$	$T_C = 25^\circ\text{C}$ (Chip capability = 125 A)		76	A
$I_{D119}$	$T_C = 119^\circ\text{C}$ , limited by external leads		76	A
$I_{DM}$	$T_C = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$		304	A
$I_{AR}$	$T_C = 25^\circ\text{C}$		100	A
$E_{AR}$	$T_C = 25^\circ\text{C}$		30	mJ
$E_{AS}$			2	J
dv/dt	$I_S \leq I_{DM}$ , $di/dt \leq 100\text{ A}/\mu\text{s}$ , $V_{DD} \leq V_{DSS}$ , $T_J \leq 150^\circ\text{C}$ , $R_G = 2\ \Omega$		5	V/ns
$P_D$	$T_C = 25^\circ\text{C}$		360	W
$T_J$			-55 ... +175	$^\circ\text{C}$
$T_{JM}$			175	$^\circ\text{C}$
$T_{stg}$			-55 ... +150	$^\circ\text{C}$
$T_L$	1.6 mm (0.062 in.) from case for 10 s		300	$^\circ\text{C}$
$M_d$	Mounting torque		1.15/10	Nm/lb.in.
Weight			6	g

TO-247 AD

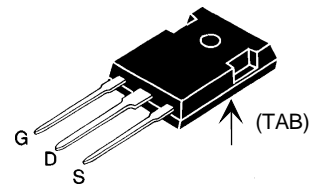

G = Gate, D = Drain,  
S = Source, TAB = Drain

### Features

- International standard package JEDEC TO-247 AD
- Low  $R_{DS(on)}$  HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance - easy to drive and to protect
- Fast intrinsic Rectifier

### Applications

- DC-DC converters
- Synchronous rectification
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- Temperature and lighting controls
- Low voltage relays


### Advantages

- Easy to mount with 1 screw (isolated mounting screw hole)
- Space savings
- High power density

Symbol	Test Conditions	Characteristic Values ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)		
		min.	typ.	max.
$V_{DSS}$	$V_{GS} = 0\text{ V}$ , $I_D = 250\ \mu\text{A}$	N06	60	V
		N07	70	V
$V_{GS(th)}$	$V_{DS} = V_{GS}$ , $I_D = 4\text{ mA}$		2.0	3.4 V
$I_{GSS}$	$V_{GS} = \pm 20\text{ V}_{DC}$ , $V_{DS} = 0$			$\pm 100\text{ nA}$
$I_{DSS}$	$V_{DS} = 0.8 \cdot V_{DSS}$ , $V_{GS} = 0\text{ V}$	$T_J = 25^\circ\text{C}$		100 $\mu\text{A}$
		$T_J = 125^\circ\text{C}$		500 $\mu\text{A}$
$R_{DS(on)}$	$V_{GS} = 10\text{ V}$ , $I_D = 40\text{ A}$	76N06/N07-11		11 mΩ
		76N06/N07-12		12 mΩ
	Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $d \leq 2\%$			

Symbol	Test Conditions	Characteristic Values ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)		
		min.	typ.	max.
$g_{fs}$	$V_{DS} = 10\text{ V}; I_D = 40\text{ A}$ , pulse test	30	40	S
$C_{iss}$	$V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$		4400	pF
$C_{oss}$			2000	pF
$C_{rss}$			1200	pF
$t_{d(on)}$	$V_{GS} = 10\text{ V}, V_{DS} = 50\text{ V}, I_D = 30\text{ A}$ $R_G = 1\ \Omega$ (External)		40	ns
$t_r$			70	ns
$t_{d(off)}$			130	ns
$t_f$			55	ns
$Q_{g(on)}$	$V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 40\text{ A}$		240	nC
$Q_{gs}$			30	nC
$Q_{gd}$			120	nC
$R_{thJC}$			0.42	K/W
$R_{thCK}$		0.25		K/W

Symbol	Test Conditions	Characteristic Values ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)		
		min.	typ.	max.
$I_S$	$V_{GS} = 0\text{ V}$			76 A
$I_{SM}$	Repetitive; pulse width limited by $T_{JM}$			304 A
$V_{SD}$	$I_F = I_S, V_{GS} = 0\text{ V}$ , Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $d \leq 2\%$			1.5 V
$t_{rr}$	$I_F = 25\text{ A}, -di/dt = 100\text{ A}/\mu\text{s}, T_J = 25^\circ\text{C}$ $V_R = 25\text{ V}, T_J = 125^\circ\text{C}$		150	ns 250 ns

**TO-247 AD (IXFH) Outline**


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	1.5	2.49	0.087	0.102

Fig.1 Output Characteristics

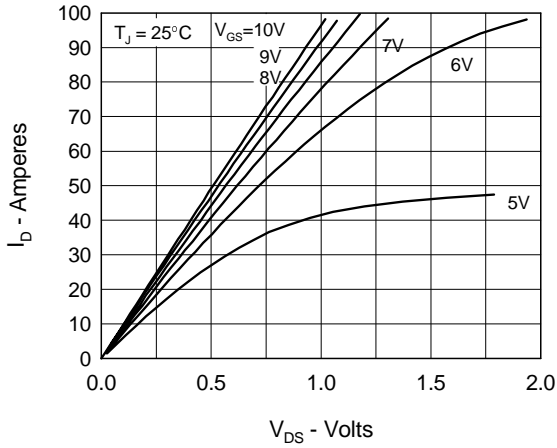


Fig. 2 Input Admittance

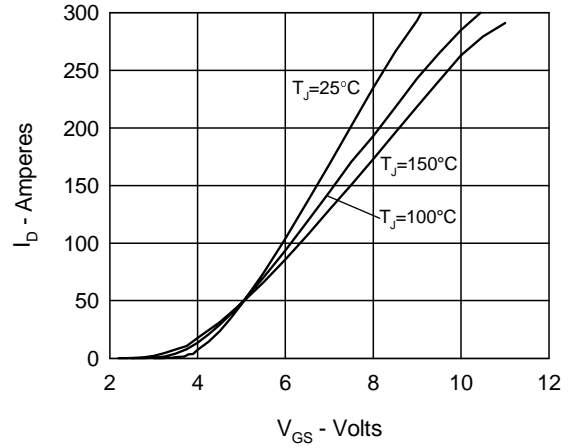


Fig. 3  $R_{DS(on)}$  vs. Drain Current

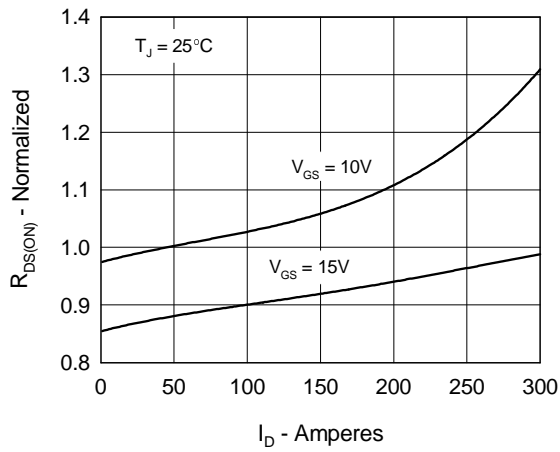


Fig. 4  $R_{DS(on)}$  Temperature Dependence

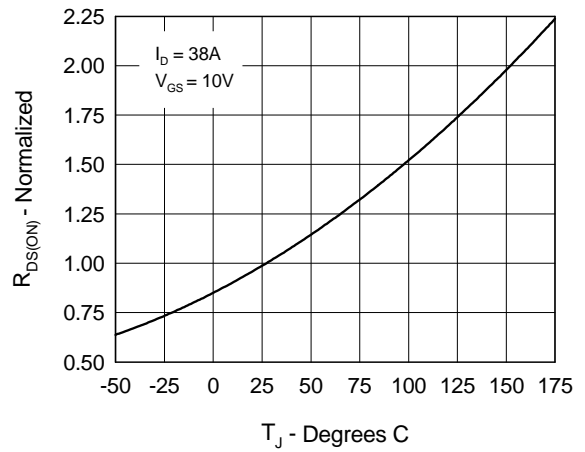


Fig. 5  $I_D$  vs. Case Temperature



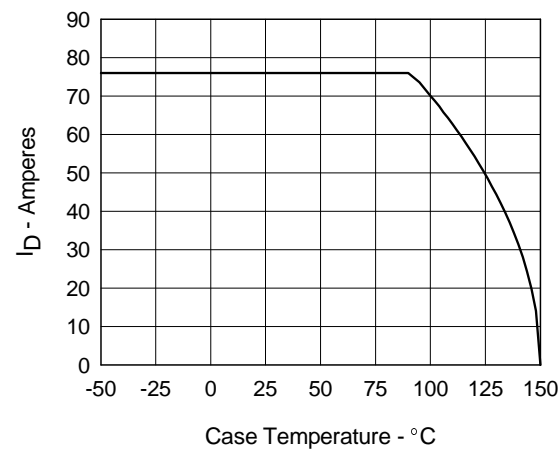



Fig. 6 Transconductance

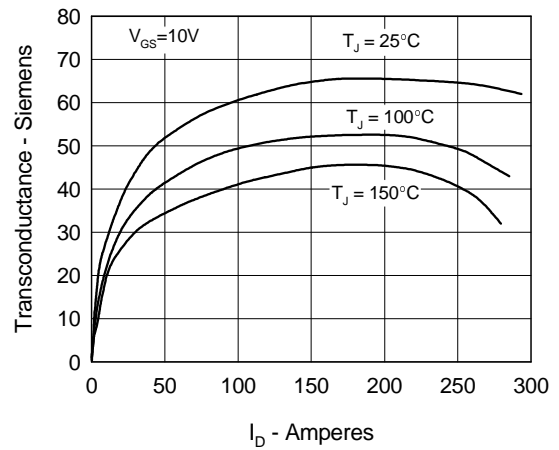


**Fig. 7 Gate Charge**

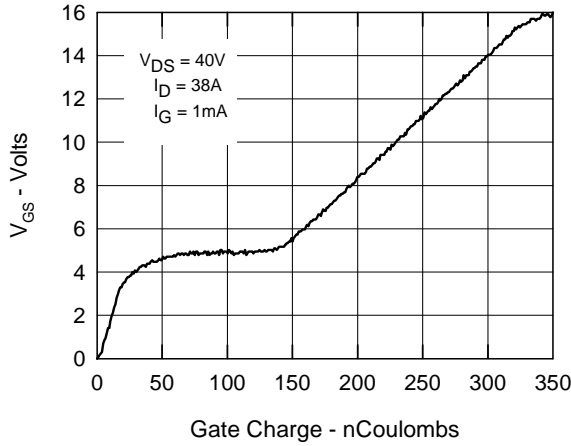


**Fig. 8 Forward Bias Safe Operating Area**

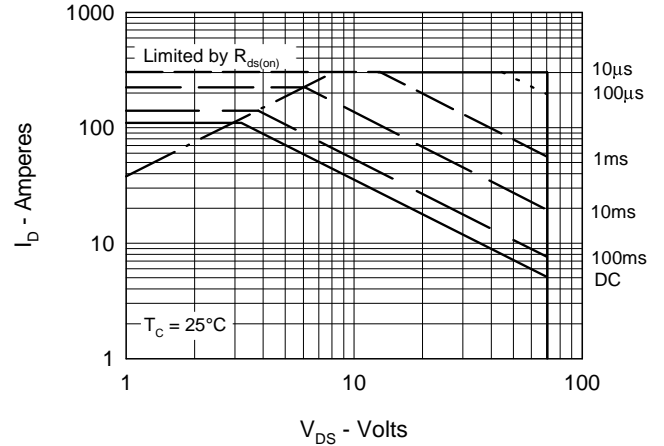


**Fig. 9 Capacitance Curves**

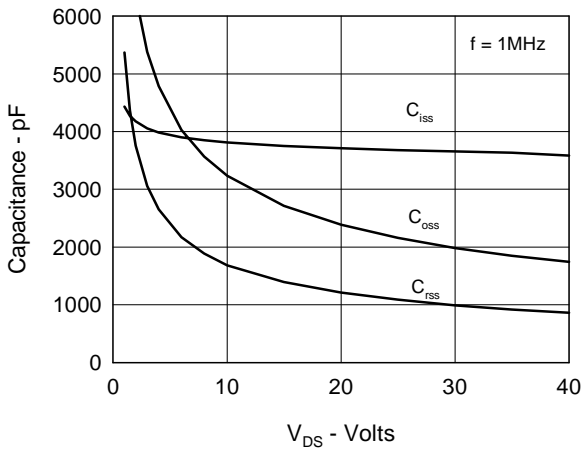

**Fig. 10 Source Current vs. Source to Drain Voltage**

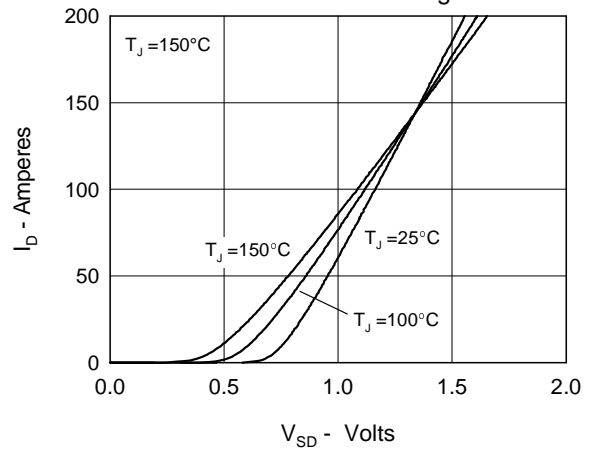

**Fig. 11 Transient Thermal Impedance**

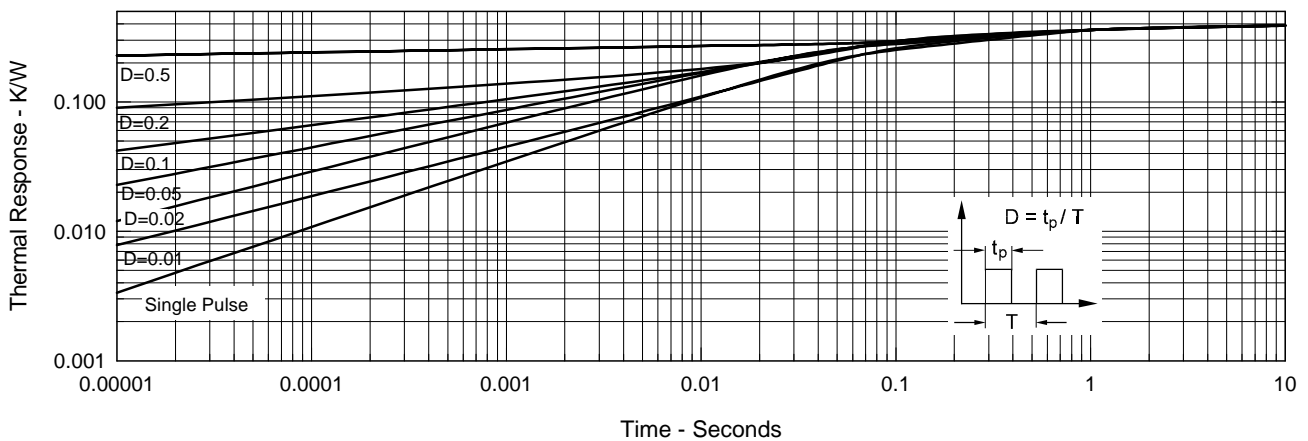



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).