

## Buck / Boost Topology

### CoolMOS™<sup>1)</sup> with fast SONIC Diode



$$I_{D25} = 54 \text{ A}$$

$$V_{DSS} = 600 \text{ V}$$

$$R_{DS(on) \text{ max}} = 41 \text{ m}\Omega$$

**ISOPLUS™** - electrically isolated surface to heatsink  
**Surface Mount Power Device**

**Part number**  
 MKG40RK600LB

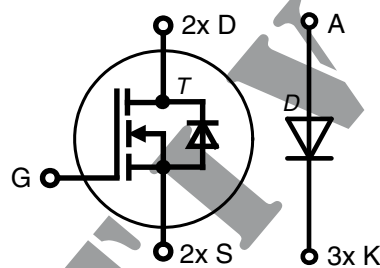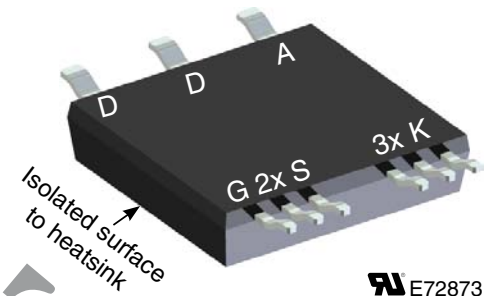

#### Features / Advantages:

- **Fast CoolMOS™<sup>1)</sup> C6 MOSFET**
- very low on-resistance
- low gate charge
- avalanche rated for unclamped inductive switching (UIS)

#### Applications:

- Buck / boost chopper
- PFC stage
- Forward converter

#### Package: SMPD

- isolated surface to heatsink
- low coupling capacity between pins and heatsink
- PCB space saving
- enlarged creepage towards heatsink
- application friendly pinout
- low inductive current path
- high reliability


<sup>1)</sup> CoolMOS™ is a trademark of Infineon Technologies AG.

MOSFET T				Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.		
$V_{DSS}$	drain source breakdown voltage	up to $T_{VJ} = 150^{\circ}C$			600	V	
$V_{GS}$	gate source voltage	continuous transient			$\pm 20$ $\pm 30$	V V	
$I_{D25}$	drain current	$T_C = 25^{\circ}C$			54	A	
$I_{D80}$		$T_C = 80^{\circ}C$			41	A	
$I_{D100}$		$T_C = 100^{\circ}C$			34	A	
$E_{AS}$	non-repetitive avalanche energy	single pulse			1.95	J	
$I_A$					13.4	A	
$dV/dt$	rate of rise of voltage	$I_S \geq I_{DM}; V_{DD} \leq 400 V$			15	V/ns	
$R_{DSon}$	static drain source on resistance	$I_D = 44 A; V_{GS} = 10 V$ (Chip)			37	41	m $\Omega$
$V_{GS(th)}$	gate threshold voltage	$I_D = 3 mA; V_{DS} = V_{GS}$			2.5	3	3.5 V
$I_{DSS}$	drain source leakage current	$V_{DS} = V_{DSS}; V_{GS} = 0 V$					5 $\mu A$
			$T_{VJ} = 25^{\circ}C$ $T_{VJ} = 150^{\circ}C$				50 $\mu A$
$I_{GSS}$	gate source leakage current	$V_{DS} = 0 V; V_{GS} = \pm 20 V$				$\pm 100$	nA
$C_{iss}$	input capacitance	$V_{GS} = 0 V; V_{DS} = 100 V; f = 1 MHz$				6.5	nF
$C_{oss}$	output capacitance		$T_{VJ} = 25^{\circ}C$ $T_{VJ} = 125^{\circ}C$			360	pF
$Q_g$	total gate charge	$V_{DS} = 480 V; I_D = 44 A$ $V_{GS} = 10 V; R_G = 1.6 \Omega$				290	190 nC
$Q_{gs}$	gate source charge		$T_{VJ} = 25^{\circ}C$			36	nC
$Q_{gd}$	gate drain (Miller) charge					150	nC
$t_{d(on)}$	turn-on delay time	Inductive switching boost mode with diode D $V_{DS} = 380 V; I_D = 44 A$ $V_{GS} = 13 V; R_G = 1.6 \Omega$				tdb	ns
$t_r$	current rise time		$T_{VJ} = 25^{\circ}C$			tdb	ns
$t_{d(off)}$	turn-off delay time					tdb	ns
$t_f$	current fall time					tdb	ns
$E_{on}$	turn-on energy per pulse					tdb	mJ
$E_{off}$	turn-off energy per pulse					tdb	mJ
$E_{rec(off)}$	reverse recovery losses at turn-off				tdb	mJ	
$R_{thJC}$	thermal resistance junction to case					0.4	K/W
$R_{thJH}$	thermal resistance junction to heatsink	with heatsink compound; IXYS test setup			0.6		K/W

Source-Drain Diode of MOSFET T				Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.		
$I_{S25}$	continuous source current	$T_C = 25^{\circ}C$			70	A	
$I_{S80}$		$T_C = 80^{\circ}C$			tdb	A	
$V_{SD}$	forward voltage drop	$I_F = 44 A; V_{GS} = 0 V$			0.9	1.1	V
$t_{rr}$	reverse recovery time	$I_F = 44 A; V_R = 400 V$ $-di_F/dt = 100 A/\mu s$					950 ns
$Q_{RM}$	reverse recovery charge (intrinsic diode)		$T_{VJ} = 25^{\circ}C$			32	$\mu C$
$I_{RM}$	max. reverse recovery current					62	A

Diode D				Ratings			
Symbol	Definitions	Conditions	min.	typ.	max.		
$V_{RRM}$	max. repetitive reverse voltage	$T_{VJ} = 25^{\circ}C$			600	V	
$I_{F25}$	continuous source current	DC			65	A	
$I_{F80}$		DC			45	A	
$V_F$	forward voltage	$I_F = 44 A$ (Chip)			1.70	2.0	V
					1.65		V
$I_R$	reverse current	$V_R = V_{RRM}$				100	$\mu A$
						8	mA
$I_{RM}$	max. reverse recovery current	$I_F = 30 A; V_R = 350 V$ $-di/dt = 240 A/\mu s$			tdb		A
$t_{rr}$	reverse recovery time	$I_F = 1 A; V_R = 30 V; -di/dt = 100 A/\mu s$			tdb		ns
$R_{thJC}$	thermal resistance junction to case					0.6	K/W
$R_{thJH}$	thermal resistance junction to heatsink	with heatsink compound; IXYS test setup			0.85		K/W

Package SMPD				Ratings		
Symbol	Definitions	Conditions	min.	typ.	max.	
$T_{stg}$	storage temperature		-55		125	°C
$T_{vj}$	virtual junction temperature		-55		150	°C
<b>Weight</b>				8		g
$F_C$	mounting force with clip		40		130	N
$d_{Spp/App}$	creepage distance on surface /	terminal to terminal	1.65			mm
$d_{Spb/Apb}$	striking distance through air	terminal to backside	4.0			mm
$V_{ISOL}$	isolation voltage	$t = 1$ second $t = 1$ minute		3000 2500		V V
$C_p$	coupling capacity	between shorted terminals and backside metal		90		pF
<b>CTI</b>			400			
$R_{pin-chip}$	resistance pin to chip	$V = (R_{Dson} + 2 \cdot R) \cdot I_D$ resp. $V = V_F + 2 \cdot R \cdot I_F$		1		mΩ

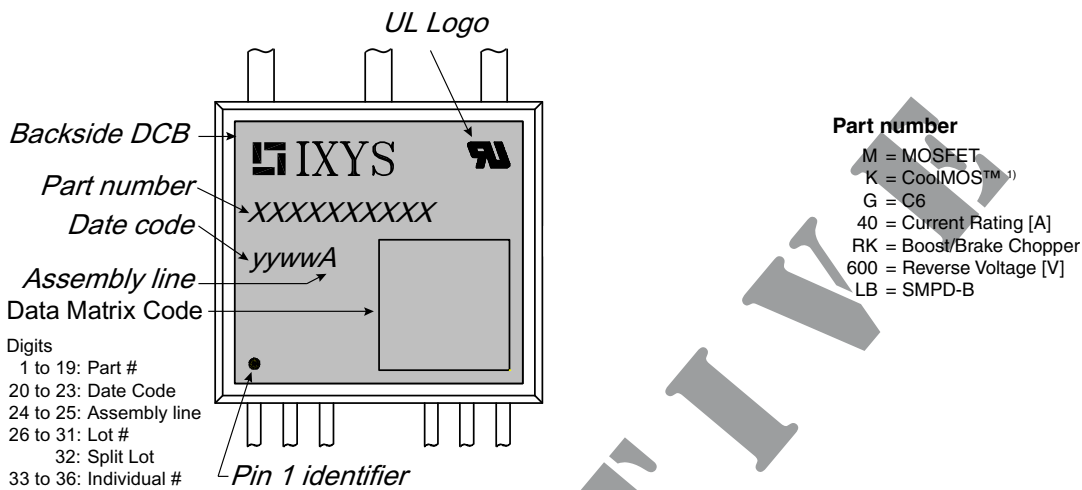

Ordering	Part Name	Marking on Product	Delivering Mode	Base Qty	Ordering Code
Standard	MKG40RK600LB-TRR	MKG40RK600LB	Tape&Reel	200	514630



### Equivalent Circuits for Simulation \*on die level



Outlines SMPD

Dimensions in mm  
(1 mm = 0.0394")

A ( 8 : 1 )

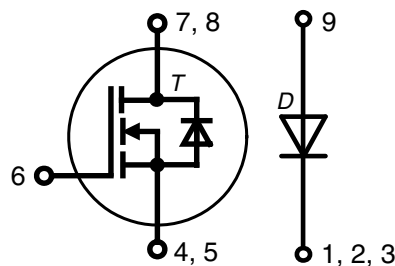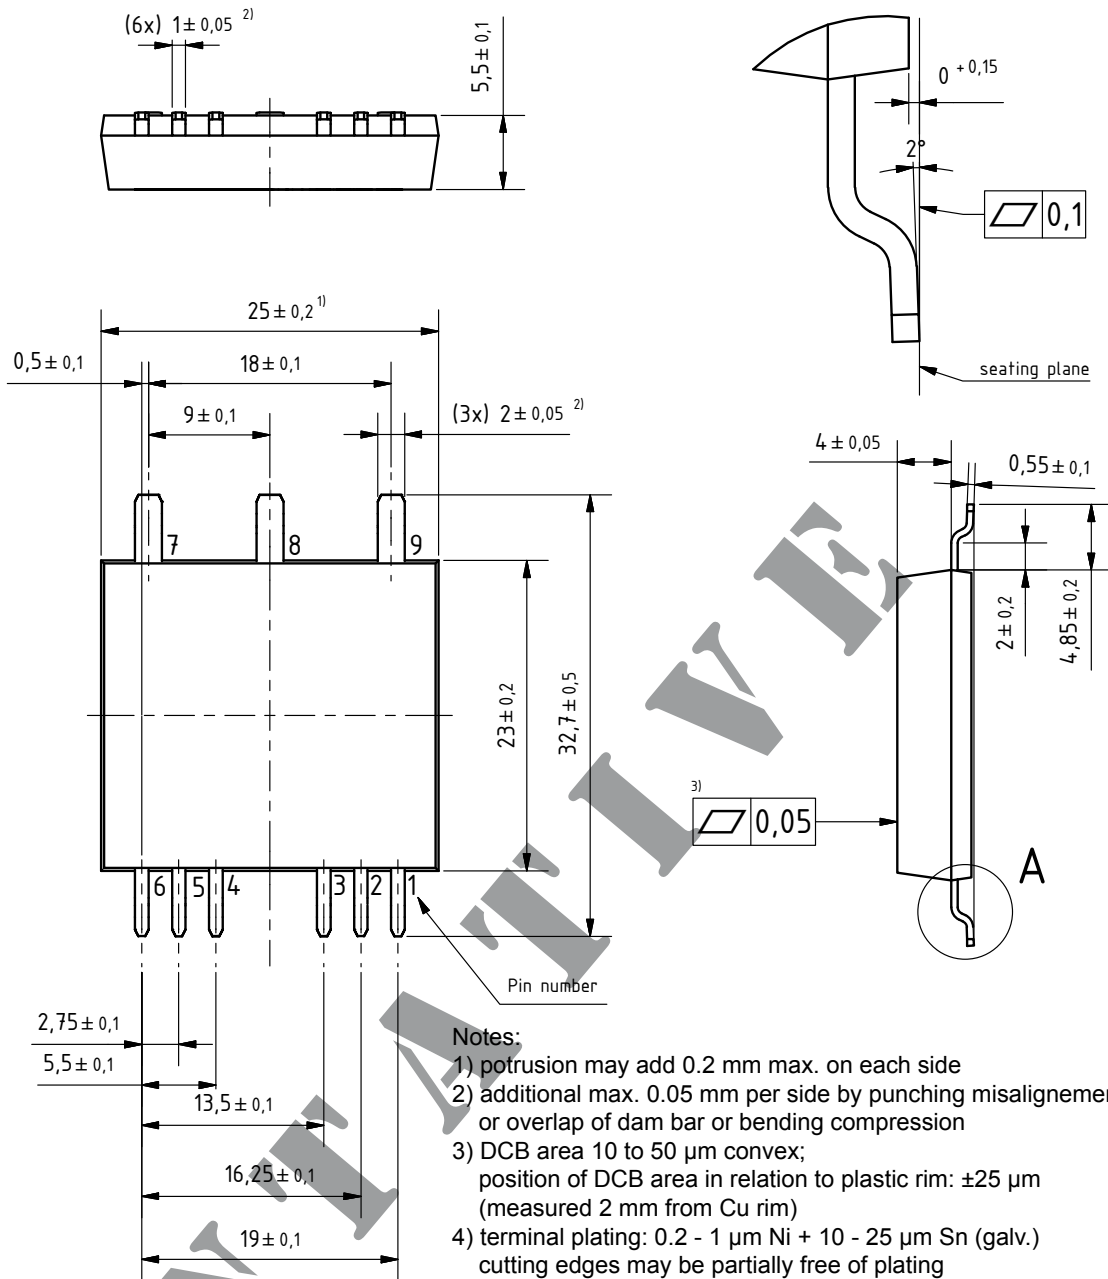



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).