


## Polar™ Power MOSFET

## IXTA10N60P IXTP10N60P

$$\begin{aligned} V_{DSS} &= 600V \\ I_{D25} &= 10A \\ R_{DS(on)} &\leq 740m\Omega \end{aligned}$$


N-Channel Enhancement Mode  
Avalanche Rated  
Fast Intrinsic Rectifier




| Symbol     | Test Conditions                                                          | Maximum Ratings |                  |
|------------|--------------------------------------------------------------------------|-----------------|------------------|
| $V_{DSS}$  | $T_J = 25^\circ\text{C to } 150^\circ\text{C}$                           | 600             | V                |
| $V_{DGR}$  | $T_J = 25^\circ\text{C to } 150^\circ\text{C}, R_{GS} = 1M\Omega$        | 600             | V                |
| $V_{GSS}$  | Continuous                                                               | $\pm 30$        | V                |
| $V_{GSM}$  | Transient                                                                | $\pm 40$        | V                |
| $I_{D25}$  | $T_C = 25^\circ\text{C}$                                                 | 10              | A                |
| $I_{DM}$   | $T_C = 25^\circ\text{C}$ , Pulse Width Limited by $T_{JM}$               | 25              | A                |
| $I_A$      | $T_C = 25^\circ\text{C}$                                                 | 10              | A                |
| $E_{AS}$   | $T_C = 25^\circ\text{C}$                                                 | 500             | mJ               |
| $dv/dt$    | $I_S \leq I_{DM}$ , $V_{DD} \leq V_{DSS}$ , $T_J \leq 150^\circ\text{C}$ | 10              | V/ns             |
| $P_D$      | $T_C = 25^\circ\text{C}$                                                 | 200             | W                |
| $T_J$      |                                                                          | -55 ... +150    | $^\circ\text{C}$ |
| $T_{JM}$   |                                                                          | 150             | $^\circ\text{C}$ |
| $T_{stg}$  |                                                                          | -55 ... +150    | $^\circ\text{C}$ |
| $T_L$      | 1.6mm (0.062in.) from Case for 10s                                       | 300             | $^\circ\text{C}$ |
| $T_{sold}$ | Plastic Body for 10 Seconds                                              | 260             | $^\circ\text{C}$ |
| $M_d$      | Mounting Torque (TO-220)                                                 | 1.13 / 10       | Nm/lb.in.        |
| Weight     | TO-263                                                                   | 2.5             | g                |
|            | TO-220                                                                   | 3.0             | g                |

| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ Unless Otherwise Specified) | Characteristic Values |      |                         |
|--------------|---------------------------------------------------------------------------|-----------------------|------|-------------------------|
|              |                                                                           | Min.                  | Typ. | Max.                    |
| $BV_{DSS}$   | $V_{GS} = 0V$ , $I_D = 250\mu A$                                          | 600                   |      | V                       |
| $V_{GS(th)}$ | $V_{DS} = V_{GS}$ , $I_D = 250\mu A$                                      | 3.0                   |      | 5.5 V                   |
| $I_{GSS}$    | $V_{GS} = \pm 30V$ , $V_{DS} = 0V$                                        |                       |      | $\pm 100$ nA            |
| $I_{DSS}$    | $V_{DS} = V_{DSS}$ , $V_{GS} = 0V$                                        |                       |      | 5 $\mu A$<br>50 $\mu A$ |
|              | $T_J = 125^\circ\text{C}$                                                 |                       |      |                         |
| $R_{DS(on)}$ | $V_{GS} = 10V$ , $I_D = 0.5 \cdot I_{D25}$ , Notes 1, 2                   |                       |      | 740 m $\Omega$          |

TO-263 AA (IXTA)



TO-220AB (IXTP)



G = Gate      D = Drain  
S = Source    Tab = Drain

### Features

- International Standard Packages
- Dynamic  $dv/dt$  Rating
- Avalanche Rated
- Fast Intrinsic Rectifier
- Low  $Q_G$
- Low  $R_{DS(on)}$
- Low Drain-to-Tab Capacitance
- Low Package Inductance

### Advantages

- Easy to Mount
- Space Savings

### Applications

- DC-DC Converters
- Battery Chargers
- Switch-Mode and Resonant-Mode Power Supplies
- Uninterrupted Power Supplies
- AC Motor Drives
- High Speed Power Switching Applications


| Symbol       | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)                                                                        | Characteristic Values |      |                         |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------|-------------------------|
|              |                                                                                                                                                    | Min.                  | Typ. | Max.                    |
| $g_{fs}$     | $V_{DS} = 10\text{V}$ , $I_D = 0.5 \cdot I_{D25}$ , Note 1                                                                                         | 6                     | 11   | S                       |
| $C_{iss}$    | $V_{GS} = 0\text{V}$ , $V_{DS} = 25\text{V}$ , $f = 1\text{MHz}$                                                                                   |                       | 1720 | pF                      |
| $C_{oss}$    |                                                                                                                                                    |                       | 160  | pF                      |
| $C_{rss}$    |                                                                                                                                                    |                       | 14   | pF                      |
| $t_{d(on)}$  | <b>Resistive Switching Time</b><br>$V_{GS} = 10\text{V}$ , $V_{DS} = 0.5 \cdot V_{DSS}$ , $I_D = 0.5 \cdot I_{D25}$<br>$R_G = 10\Omega$ (External) |                       | 23   | ns                      |
| $t_r$        |                                                                                                                                                    |                       | 27   | ns                      |
| $t_{d(off)}$ |                                                                                                                                                    |                       | 65   | ns                      |
| $t_f$        |                                                                                                                                                    |                       | 21   | ns                      |
| $Q_{g(on)}$  | $V_{GS} = 10\text{V}$ , $V_{DS} = 0.5 \cdot V_{DSS}$ , $I_D = 0.5 \cdot I_{D25}$                                                                   |                       | 32   | nC                      |
| $Q_{gs}$     |                                                                                                                                                    |                       | 12   | nC                      |
| $Q_{gd}$     |                                                                                                                                                    |                       | 10   | nC                      |
| $R_{thJC}$   | TO-220                                                                                                                                             |                       |      | 0.62 $^\circ\text{C/W}$ |
| $R_{thCH}$   |                                                                                                                                                    |                       | 0.50 | $^\circ\text{C/W}$      |

## Source-Drain Diode

| Symbol   | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)                           | Characteristic Values |      |       |
|----------|-------------------------------------------------------------------------------------------------------|-----------------------|------|-------|
|          |                                                                                                       | Min.                  | Typ. | Max.  |
| $I_S$    | $V_{GS} = 0\text{V}$                                                                                  |                       |      | 10 A  |
| $I_{SM}$ | Repetitive, Pulse Width Limited by $T_{JM}$                                                           |                       |      | 30 A  |
| $V_{SD}$ | $I_F = I_S$ , $V_{GS} = 0\text{V}$ , Note 1                                                           |                       |      | 1.5 V |
| $t_{rr}$ | $I_F = 10\text{A}$ , $V_{GS} = 0\text{V}$<br>$-di/dt = 100\text{A}/\mu\text{s}$ , $V_R = 100\text{V}$ |                       | 500  | ns    |


- Notes: 1. Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .  
2. On through-hole packages,  $R_{DS(on)}$  Kelvin test contact location must be 5mm or less from the package body.

## TO-263 Outline

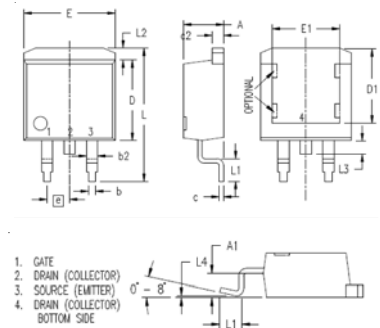


| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .160     | .190 | 4.06        | 4.83  |
| A1  | .080     | .110 | 2.03        | 2.79  |
| b   | .020     | .039 | 0.51        | 0.99  |
| b2  | .045     | .055 | 1.14        | 1.40  |
| c   | .016     | .029 | 0.40        | 0.74  |
| c2  | .045     | .055 | 1.14        | 1.40  |
| D   | .340     | .380 | 8.64        | 9.65  |
| D1  | .315     | .350 | 8.00        | 8.89  |
| E   | .380     | .410 | 9.65        | 10.41 |
| E1  | .245     | .320 | 6.22        | 8.13  |
| e   | .100 BSC |      | 2.54 BSC    |       |
| L   | .575     | .625 | 14.61       | 15.88 |
| L1  | .090     | .110 | 2.29        | 2.79  |
| L2  | .040     | .055 | 1.02        | 1.40  |
| L3  | .050     | .070 | 1.27        | 1.78  |
| L4  | 0        | .005 | 0           | 0.13  |


## TO-220 Outline

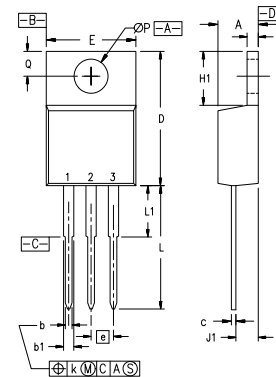


**Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$**

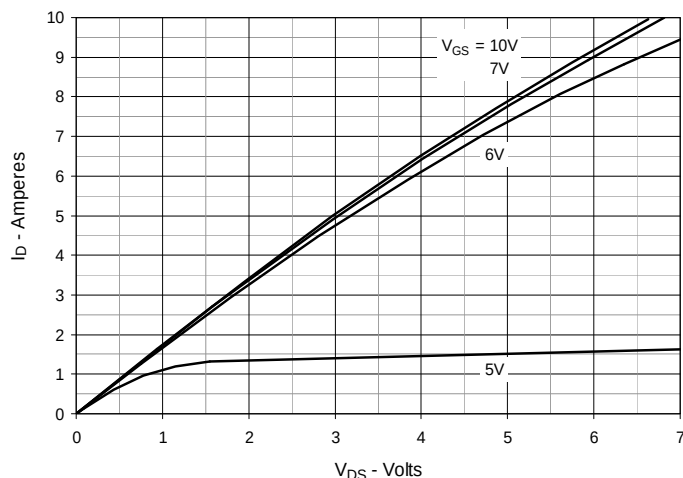


**Fig. 2. Extended Output Characteristics @  $T_J = 25^\circ\text{C}$**

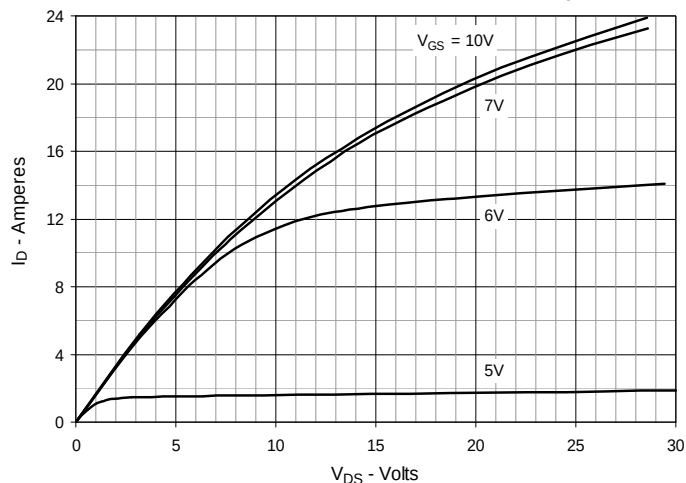


**Fig. 3. Output Characteristics @  $T_J = 125^\circ\text{C}$**

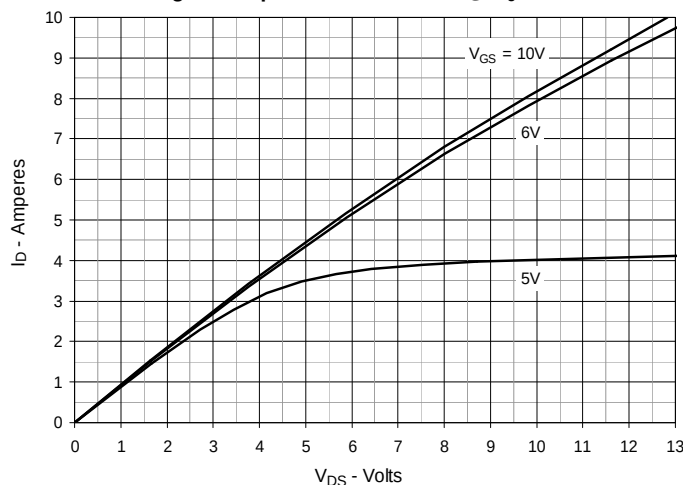


**Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = 5\text{A}$  Value vs. Junction Temperature**

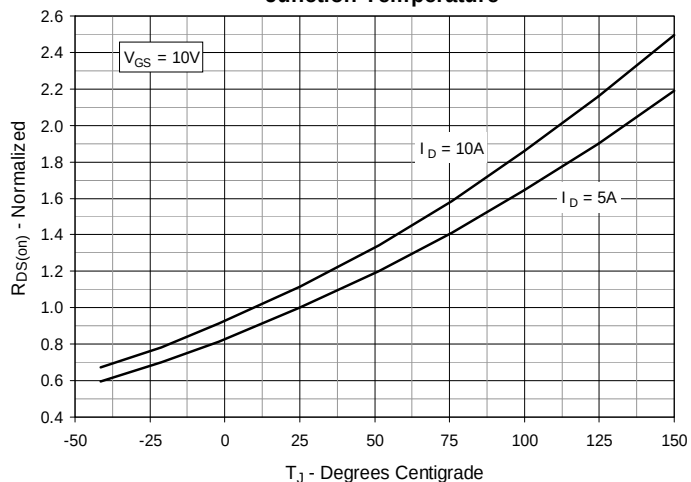


**Fig. 5.  $R_{DS(on)}$  Normalized to  $I_D = 5\text{A}$  Value vs. Drain Current**

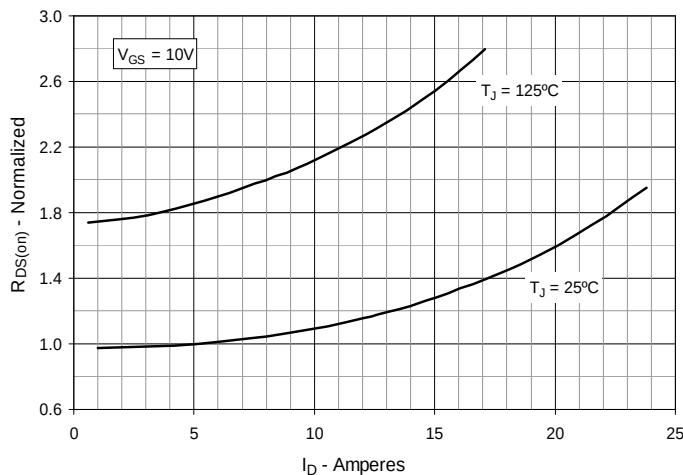


**Fig. 6. Maximum Drain Current vs. Case Temperature**

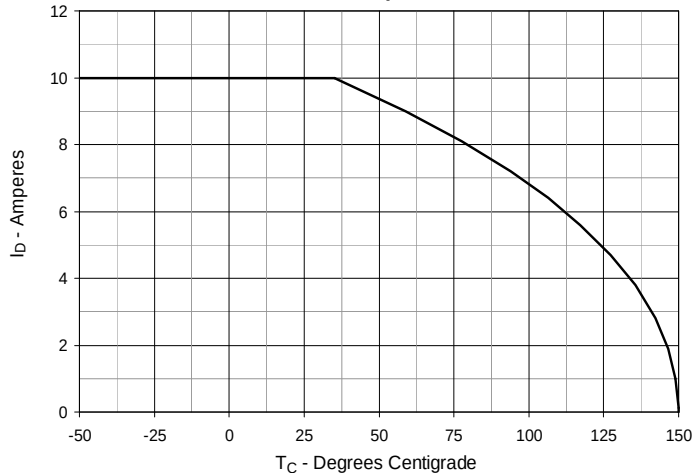


**Fig. 7. Input Admittance**

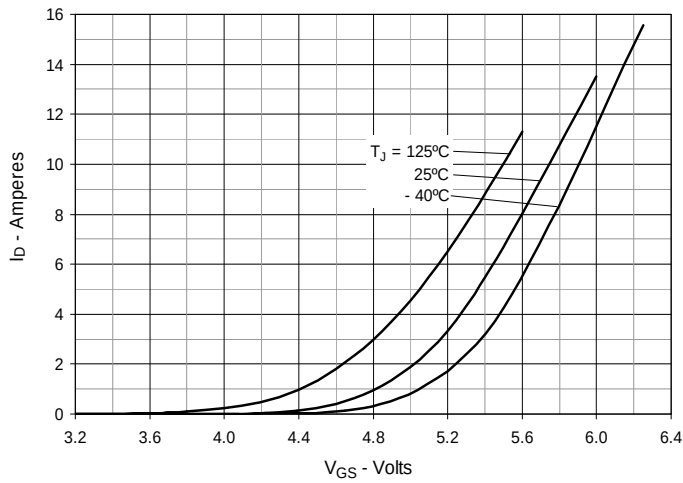


**Fig. 8. Transconductance**

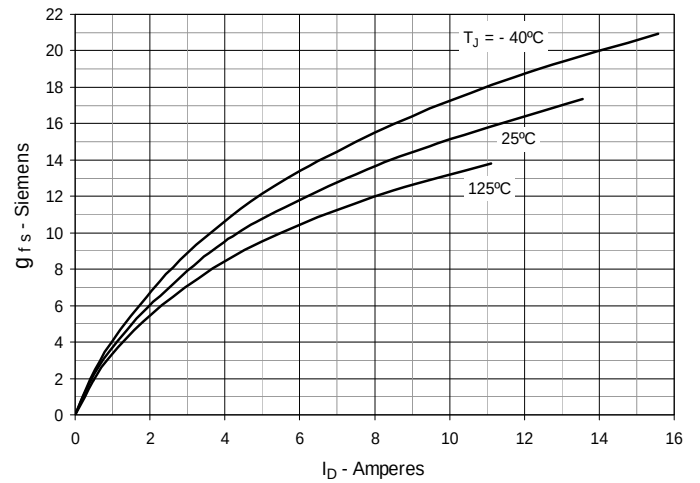


**Fig. 9. Forward Voltage Drop of Intrinsic Diode**

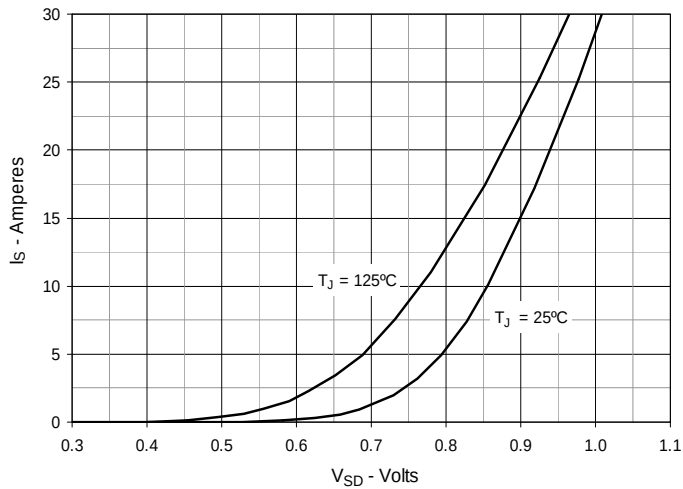


**Fig. 10. Gate Charge**

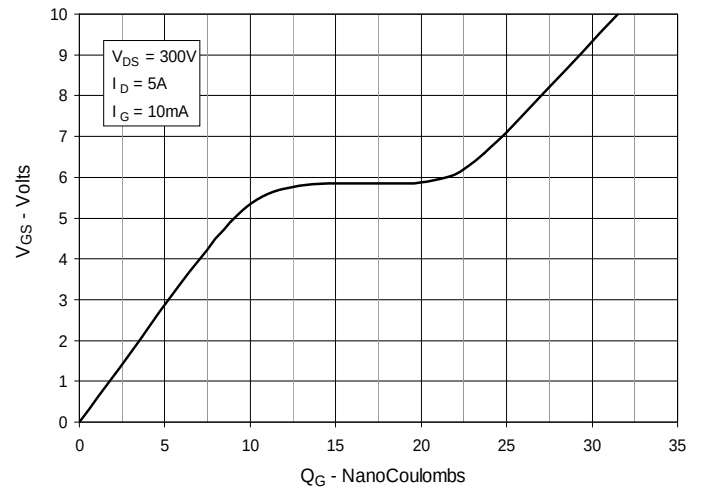

**Fig. 11. Capacitance**

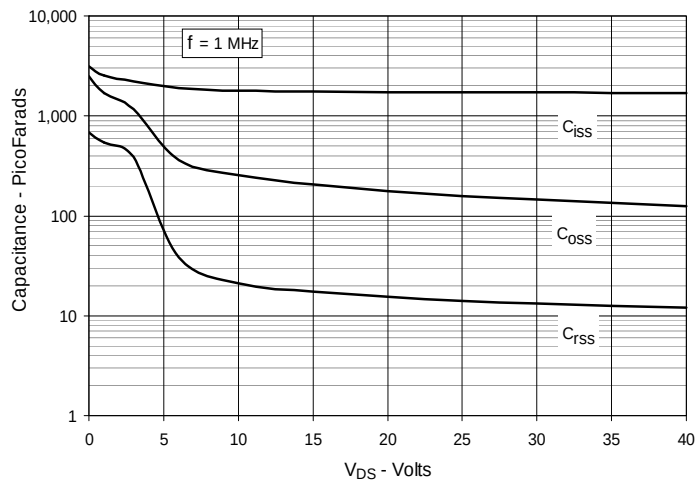

**Fig. 12. Maximum Transient Thermal Impedance**

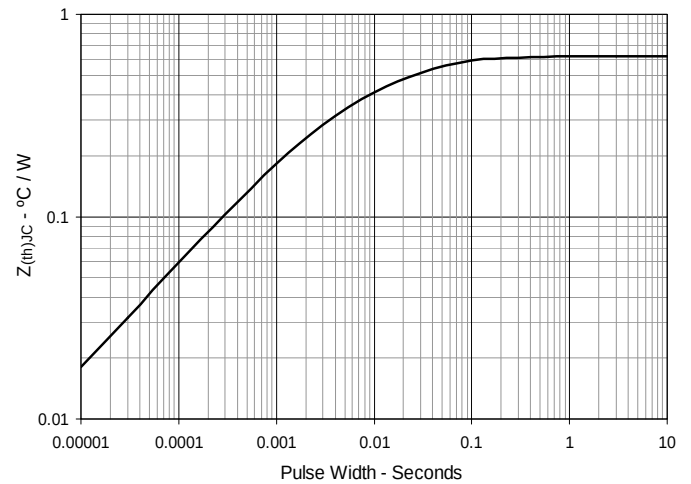



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).